

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Closing Corner, Northeast Corner of Section 1
 Township 144 N , Range 28 W , 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS.

A000581301
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
06/12/2012 11:25:39 AM
AS DOC #: A000581301
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

037297
 TX:4026798

On 1-24-11 , found a(n): brass capped 6"
DATE
concrete monument flush with ground.


- left monument as found lowered monument
 removed monument (explain) raised monument

On , set a(n):
DATE

(reserved for recording data)

See "Statement of Evidence" for further details (on back)


GPS I.D.: Co. Proj. No.:

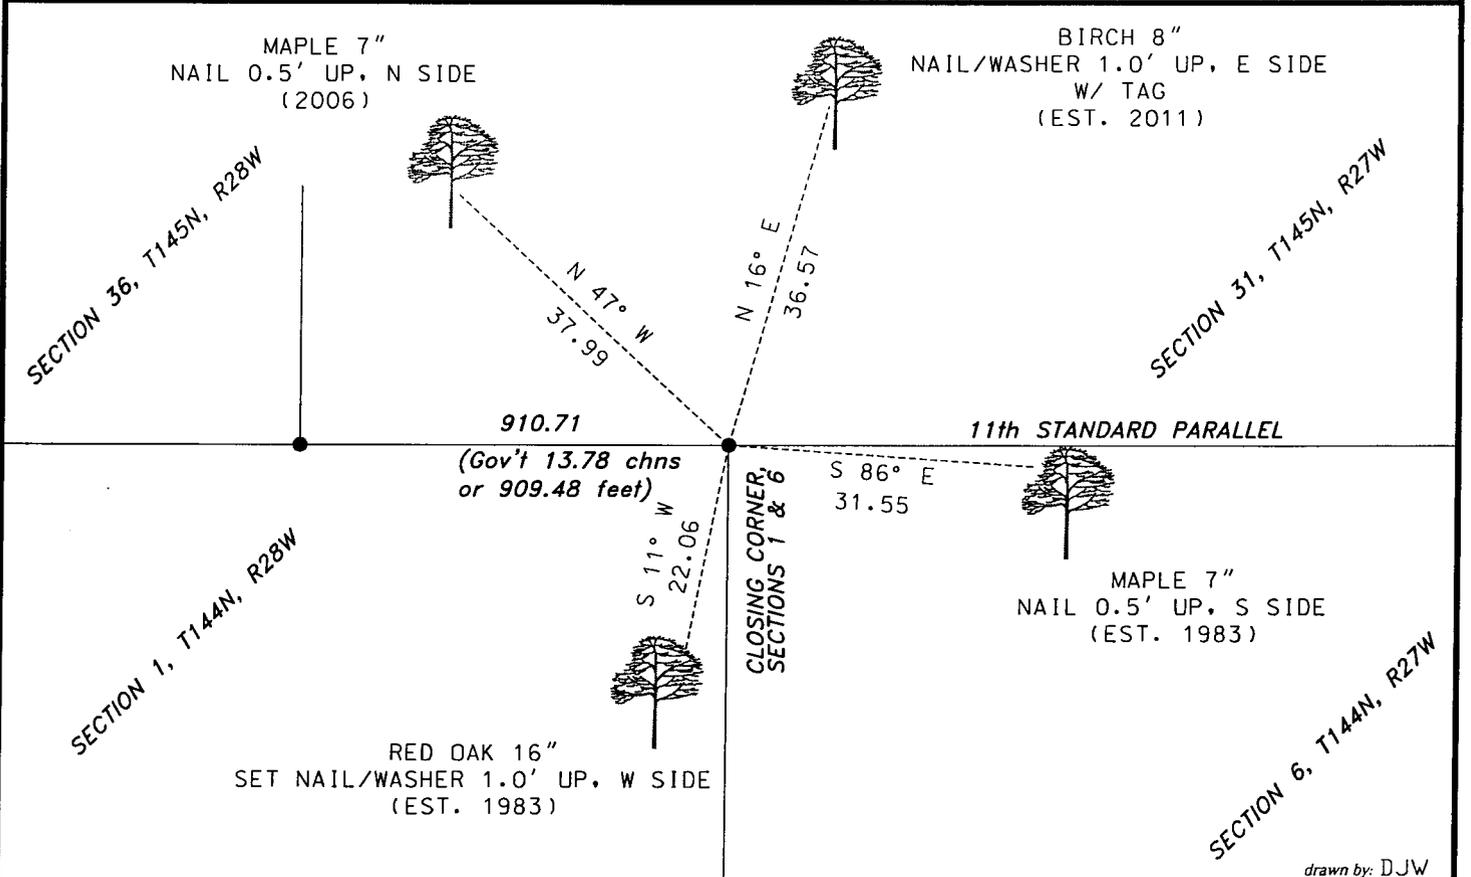

drawn by: DJW

"SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

NAD 83 Latitude (N):	<u>47° 19' 31.42921"</u>
Longitude (W):	<u>94° 09' 18.56291"</u>
CCNZC 83 Northing:	<u>290333.11</u>
Easting:	<u>515256.09</u>
NAD 83 S.P. Northing:	<u>1176117.24</u>
(Central) Easting:	<u>2648190.34</u>

Dennis J. Warner
signature

Printed Name: Dennis J. Warner

5/10/2012
date

License No. 42656

County Surveyor Land Surveyor

STATEMENT OF EVIDENCE: Closing corner, northeast corner of Section 1, T144N, R28 West of the 5th Principal Meridian.

1873 This corner was established by P.H. Conger, Deputy Surveyor, in the township boundary survey. His notes indicate a post was placed at the corner and witnesses were established as follows:

Birch	5"	S20W	60 links	(39.60 feet)
Birch	6"	S09E	74 links	(48.84 feet)

1912 John W. Curo, Cass County Surveyor, recovered an old stake and no sign of Gov't bearing trees. He did find an 4"Oak to the southeast and an 10" Oak to the southwest, but not of record. Information on file with the Cass County Survey Office.

1937 H.D. Craig, GLO Surveyor in the notes of the Dependant Resurvey of the 11th Standard Parallel states "Proportionate distance, there is no remaining evidence of the original closing township corner. Set a concrete monument, 2 ft. long, 7 ins. Diam., 20 ins. In the ground, for closing corner" with a 3.5 inch brass tablet embedded in top and reference as follows:

N. Pine	14"	S16 1/4E	377 links	(248.82 feet)
N. Pine	9"	S76 1/2W	198 links	(130.68 feet)

Information on file with the Secretary of State, St. Paul, MN.

1966 Milton Hansey, USFS, T144N R27W Book 1, Page 18, on file in the Cass Lake Office, recovered a concrete monument with a brass cap, and witnesses were found and made as follows:

Pine stump		S16 1/4E	248.82 feet
Decayed blowdown pine		S76 1/2W	130.68 feet
Red Oak	11"	S10W	22.6 feet
Maple	5"	S65E	35.83 feet

1981 Whitehorn & Oleson, USFS personnel, T144N R27W Book 1, Page 18, and T145N R27W Book 3, Page 3, found on file in the Cass Lake Office, found the 1937 GLO concrete monument in good condition.

1983 Robertson and Harman, USFS personnel, T144N R27W Book 1, Page 18, on file in the Cass Lake Office, recovered the monument in good shape, witnesses were found and made as follows:

Red Oak	12"	S11W	22.06
Maple stump	6.2"	S66E	35.83 feet
Red Oak	9.5"	N38E	10.63 feet
S. Maple	4.4"	N83E	31.55 feet

2006 Bruce Hippen, Cass County Survey Office, found the GLO brass cap in concrete cylinder, up 0.5 foot, 250 feet more or less, north of 6 Mile Lake Road and witnesses as follows:

Red Oak	12"	S11W	22.06 feet
Maple	6"	N83E	31.55 feet
Maple	6"	N47W	37.99 feet

2011 Personnel from Short Elliott Hendrickson found the monument and witnesses were found and made as shown on the face of this certificate. An analysis of the record information and field evidence supports this monument as the best evidence of the corner position.