

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 36

Township 142 N, Range 27 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF CASS.

A000581322
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
06/12/2012 11:26:00 AM
AS DOC #: A000581322
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

(reserved for recording data)


On 4-06-2012, found a(n): 2.5' galvanized pipe
with a 3" brass cap 2' above swamp and leaning NE.

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On DATE, set a(n):

See "Statement of Evidence" for further details (on back)

GPS I.D.: Co. Proj. No.:

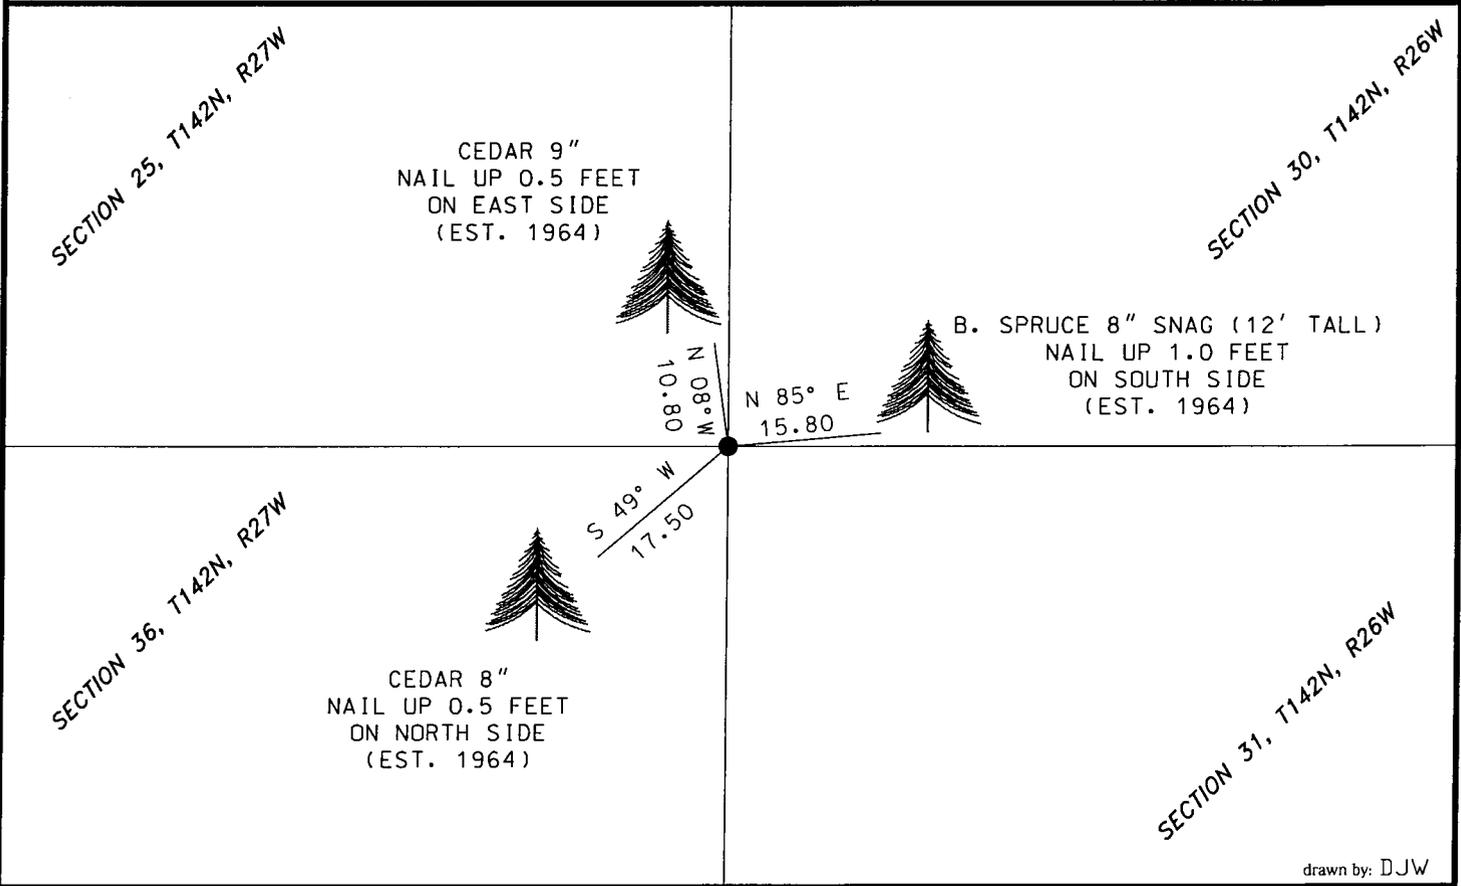

drawn by: DJW

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

NAD 83 Latitude (N): 47°04'41.78426"
 Longitude (W): 94°01'47.72059"
 CCNZC 83/96 Northing: 200239.65
 Easting: 546532.48
 NAD 83 S.P. Northing: 1086038.63
 Central Zone Easting: 2679502.01

Dennis J. Warner
signature
Printed Name: Dennis J. Warner

5/10/2012
date
License No. 42656
 County Surveyor Land Surveyor

STATEMENT OF EVIDENCE: Northeast corner of Section 36, T142N, R27 West of the 5th Principal Meridian.

1872 This corner was established by Hayward & Griffin, Deputy Surveyors, in the township boundary survey. Their notes indicate a post was placed at the corner and witnesses were made as follows:

White Pine	14"	S20E	7 links (4.62 feet)
Birch	12"	S58W	12 links (7.92 feet)
Cedar	6"	N27W	10 links (6.60 feet)
Cedar	6"	N49E	20 links (13.2 feet)

1964 July, James Ekstrom, forest service technician, USFS notes 142-26, Book 2, page 1, "chained south from approximate ¼ corner to sections 25-30 R26-27W 2640.0 at 1320.0' on this line came to F.S. Location Poster. Continued on south to Sec. Cor. Where I found a F.S. Location Poster put up in 1940 from this found post believed put there at this date. Checked dist. & bearing to very old stump S-E & S-W which could have been orig BT's check good. No evidence on N-W & N-E B.T's."

Set a 2 inch inside diameter 60 inch long galvanized steel monument filled with concrete and capped with a 3 inch diameter bronze tablet.

New B.T.'s as follows:

Cedar	6"	N08E	10.8 feet	scribed S25 BT
Cedar	6"	S49W	17.5 feet	scribed S36 BT
B. Spruce	7"	N85E	15.8 feet	scribed S30 BT
Cedar	6"	S04E	21.7 feet	scribed S31 BT
Steel sign post		West	4.9 feet	54-2 and 54-4 signs attached

1964 October, William Okerman, filed an Affidavit As To Location Of Government Corner, signed and dated but no document number, states the above information from July 1964.

2012 March, Rob Main, USFS and Bryan Hippen, Cass County Surveyors Office, USFS notes 142-26, Book 2, page 1, recovered the 1964 monument and the following witnesses:

Cedar	8"	N08W	10.8 feet	
Cedar	8"	S49W	17.5 feet	
B. Spruce	8"	N85E	15.8 feet	a 12' tall snag
Cedar	6"	S04E	21.7 feet	rotted stump
Steel Sign Post		West	4.9 feet	lying down

2012 April, Personnel from Short Elliott Hendrickson found the 1964 monument and witnesses were found and made as shown on the face of this certificate. An analysis of the record information and field evidence supports this monument as the best evidence of the original corner position.