



A000583786

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/6/2012 9:09:53 AM

AS DOC #: A000583786

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


Index Number A-25

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Closing Northeast Corner of Section 1, Township 136, Range 31  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 5-14-11 found a 1/2" IP with cap stamped 17253  
Down 0.5'
- left monument as found       lowered monument       removed monument (explain)
- On 5-14-11 placed an Rebar with 3.5" brass cap. Flush.  
Stamped Cass Cty RLS # 43932 in same location.  
AT E' of E-W Road  $\pm 3'$  East of E of ditch.

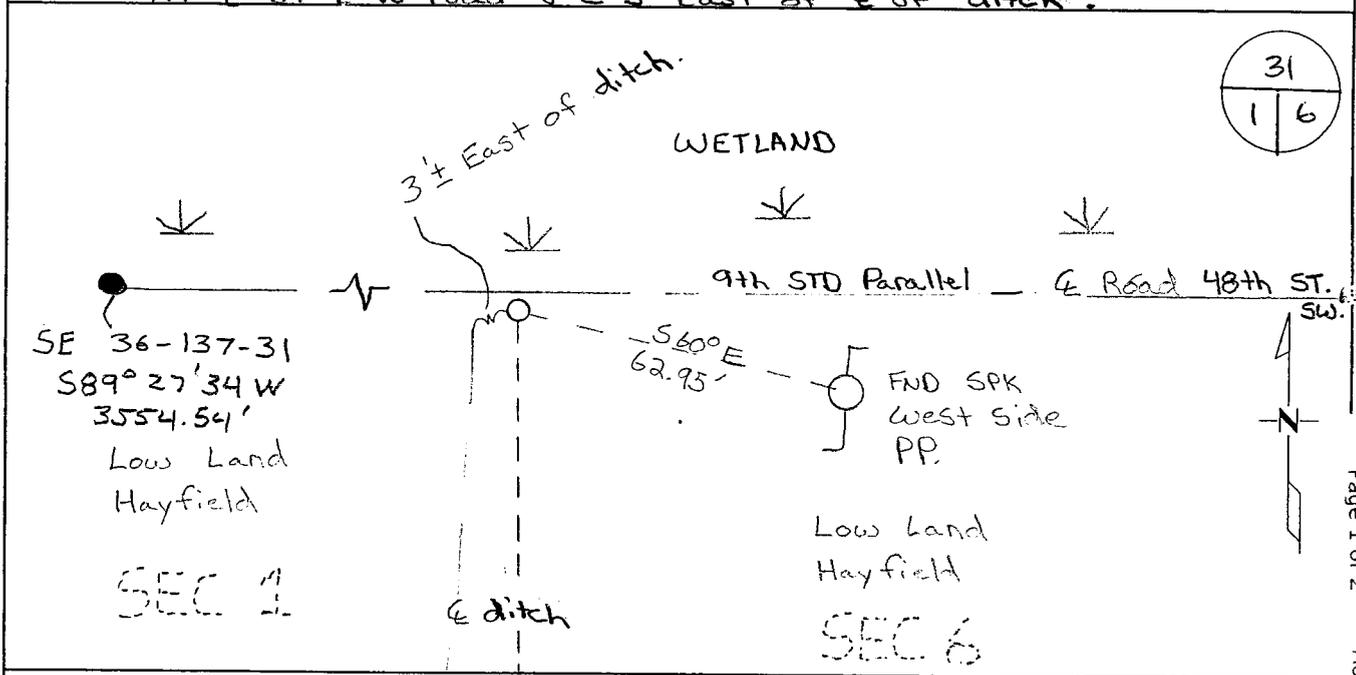

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature

*Chris Hoglund*  
Chris Hoglund, PS  
License No. 43932

Date:

6/13/12





**Statement of Evidence:**

Closing Northeast Corner of Section 1, Township 136 North, Range 31 West, Moose Lake Township, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota.

1858    Original US General Land Office survey by Atwater, set a wood post and bearing trees noted as:

5" Tamarack	S 30° E	17 links
6" Tamarack	S 30° W	21 links

1908    John Curo, Cass County Surveyor, Set 4x4x66" Tam Post proportionally – no B.T.s near, filed in County Survey Record Book "B", Page 140-157, Survey Record No. 273, and also in Curo Book 85, Page 260.

1911    A.W. Moulster, Deputy Surveyor, found post set by Curo, set 1 1/4x48" Galv. I.P., filed in County Survey Record No. 191, Book "A", Page 456-464 and also in Curo Book 50, Page 106, 114 & 135. Corner is shown 5338.02 feet east of the NW corner of Section 1.

2003    Bruce Grivna, LS 17253 (Westwood Professional Services, Inc) set 1/2" x 14" iron pipe capped LS 17253. Pipe was set 5338.02 feet east of a 2" iron pipe in concrete found at the NW corner of Section 1, using a line between said NW corner of Section 1 and the NE corner of Section 6, Twp 136N, Range 31W. Position fits closely centerline of road and ditch to south

2011    Westwood Professional Services, Inc. found 1/2" pipe capped LS 17253 in place. Set a 5/8"x24" rebar with 3.5" cap in the same location as found pipe. Accepted Grivna monument based on being set at an obliterated position based on 1911 Moulster information. Located set monument with a 20 minute static GPS observation and verified with a VRS GPS observation. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc is the accepted location for this corner.

Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj)  
N: 273223.18  
E: 518288.86

Central State Plane Coordinate  
N: 922986.00  
E: 2588521.85