



A000583917

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/7/2012 3:03:00 PM

AS DOC #: A000583917

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Index Number A-9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North East Corner of Section 5, Township 134, Range 29
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 5-23-11 found a 1.5" open pipe down 0.5'
4.65' North of 1" open down 0.5'

left monument as found lowered monument removed monument (explain)

On _____ placed an _____

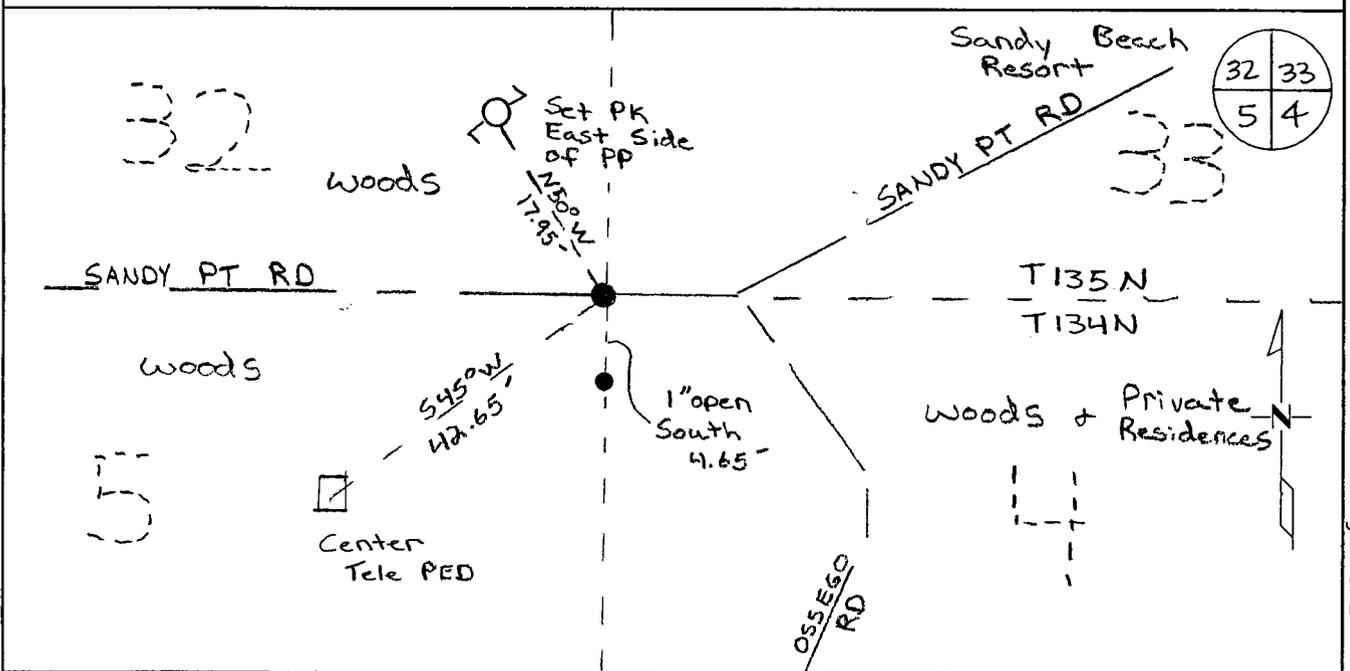

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature _____

Chris Hoglund, PS
License No. 43932

Date: 6/13/12

Page 1 of 2 A000583917





Statement of Evidence:

Northeast Corner of Section 5, Township 134 North, Range 29 West, Hiram Township, 5th
 Principal Meridian, Cass County, Minnesota.

1865 Original US General Land Office survey by EN Darling, set a wood post and bearing trees noted as:

8" Linden	S 10° W	7 links
7" Ironwood	N 43° E	41 links
6" Ironwood	N50° W	46 links
8"Linden	S 80° E	33 links

1916 E.B. Horst found stub of old Gov't Bearing Tree and the rotted stump of the other three bearing trees. Set 2"x48" pipe based on found bearing trees, filed in County Book "B", page 550-553, Survey Record No. 354, also in Curo Book 64, Page 64. He noted the following bearing trees

8" Maple	N 88° E	26.7 feet
9" Elm	N 49° W	11.5 feet
12" Maple	S46° W	48.5 feet
11"Elm	S 47° E	30.3 feet

1927 Plat of Manatauk shows monument in place, filed in the office of the Cass County Recorder.

1935 John W. Curo found 2"x48" pipe bent, straightened pipe, filed in Curo Book 223, Page 132.

2011 Westwood Professional Services, Inc. found a 2" pipe in place as described by Horst in 1916, also found several pipe from the plat of Manatauk, which agree (distances and angles) with the location of the found 2" pipe. Accepted found pipe location as being the pipe set by Horst in 1916, and as being a perpetuation of the original GLO survey. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc is the accepted location for this corner.

Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj)
 N: 209389.41
 E: 529200.64