



A000583918

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/7/2012 3:03:01 PM

AS DOC #: A000583918

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep

Index Number R-25

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



NORTH EAST Corner of Section 25, Township 133, Range 31  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 3-10-11 found a 1/2" IP with CAP Stamped 41643.  
Down 1.5'.

left monument as found       lowered monument       removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

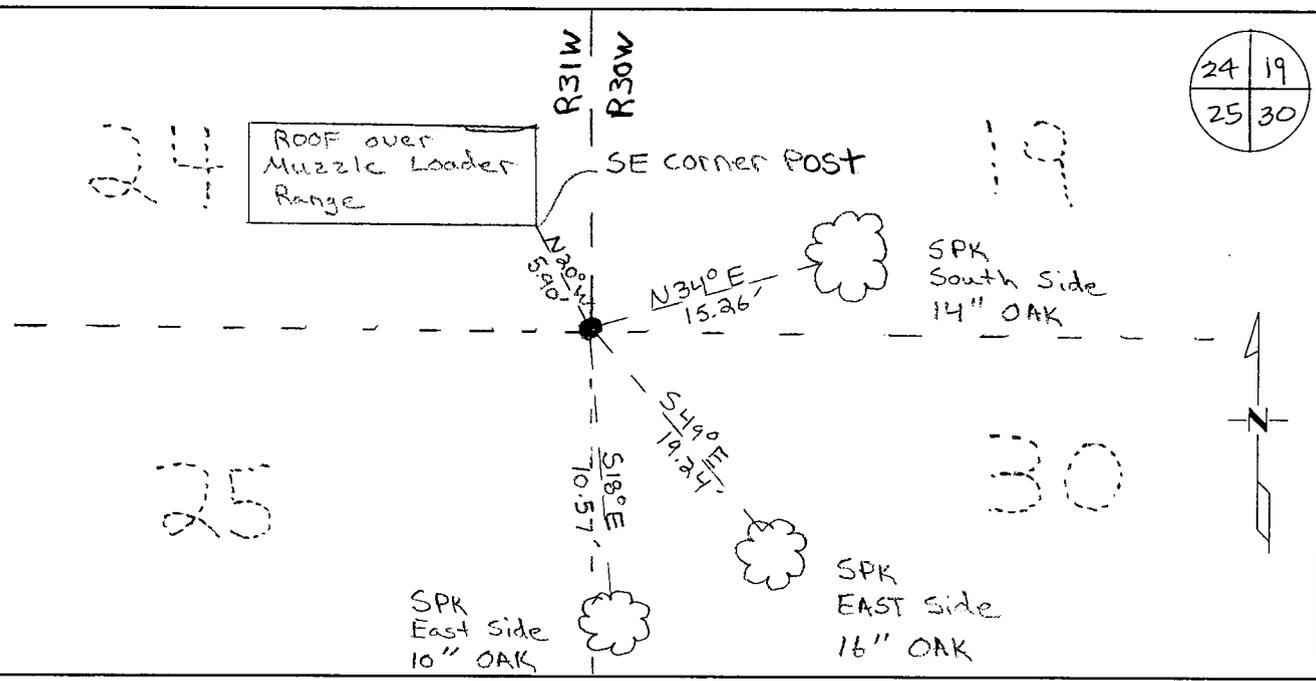

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature   
Chris Heglund, PS  
License No. 43932

Date: 6/13/12

Page 1 of 2 A000583918



**Statement of Evidence:**

Northeast Corner of Section 25, Township 133 North, Range 31 West, May Township, 5<sup>th</sup>  
 Principal Meridian, Cass County, Minnesota.

1858 Original US General Land Office survey by E.N. Darling, set a wood post and bearing trees noted as:

8" Birch	S 24° E	22 links
7" Birch	S 57° W	10 links
8" Aspen	N 67° E	38 links
7" Aspen	N 58 1/2° W	57 links

1964 Dean Anderson certificate of survey shows monument found in place, measuring 2628.7 feet from the East Quarter Corner of Section 24, Township 133, Range 30.

1972 Dean Anderson plat Castle Addition to Bigwater shows found monument in place.

???? Widseth, Smith, Nolting set corner based on 1964 Dean Anderson information.

2011 Westwood Professional Services, Inc. found a 1/2" pipe capped L.S. 41643, monument position agrees with previous Dean Anderson position. Measured 2628.57 feet to the East Quarter corner of Section 24 compared to 1964 Dean Anderson distance of 2628.7. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc is the best available evidence for this corner.

Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj)  
 N: 156477.99  
 E: 487245.21