



A000583920

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/7/2012 3:03:03 PM

AS DOC #: A000583920

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


Index Number A-9-10

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to MC #11 of Section 4, Township 132, Range 29  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 6-27-11 found a 1/2" IP with Cap # 17253.
- left monument as found       lowered monument       removed monument (explain)
- On \_\_\_\_\_ placed an \_\_\_\_\_

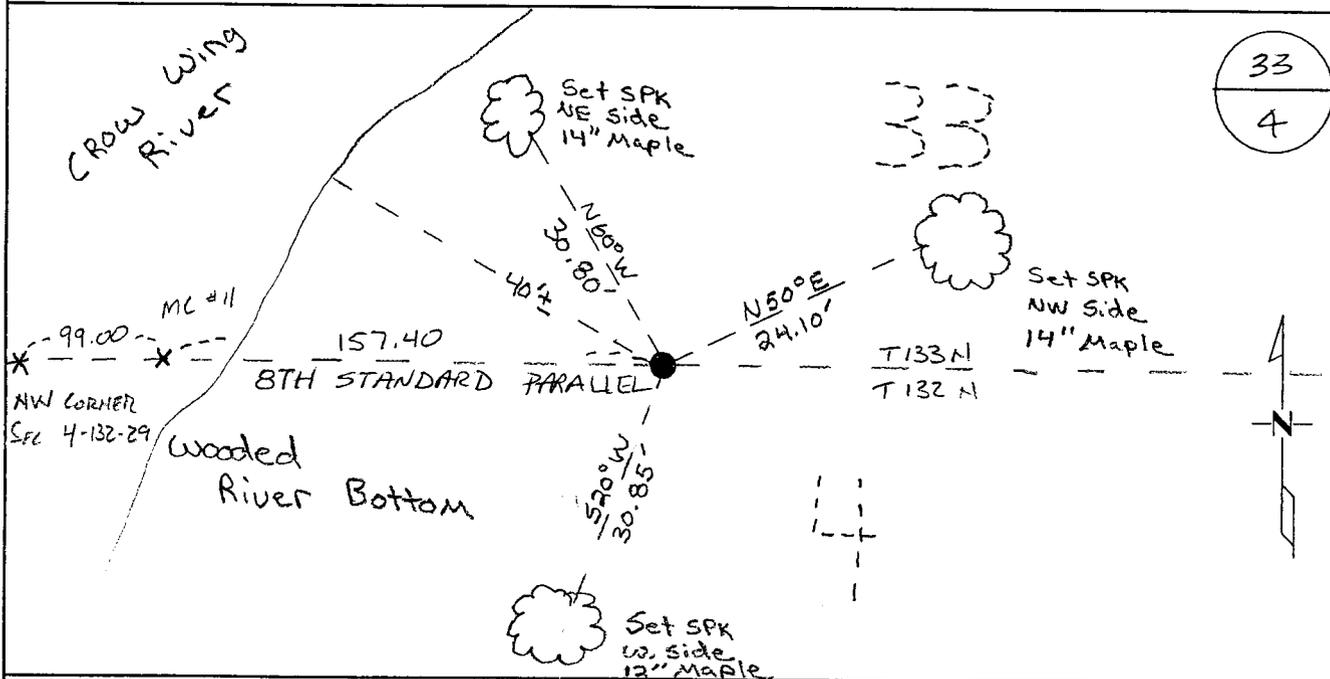

Statement of evidence for this corner location is on back of this page.


I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hoglund  
Chris Hoglund, PS  
License No. 43932

Date: 6/13/12

Page 1 of 2

A000583920





**Statement of Evidence:**

Meander Corner #11 on the North line of Section 4, Township 132 North, Range 29 West, Sylvan Township, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota.

1858 Original US General Land Office survey, by Oscar Taylor, set a wood post and bearing trees noted as:

16" Elm	N 46° E	159 links
8" Hackberry	N 68° E	132 links

1992 Comstock and Davis, Thomas P. Thiessen, LS 16097 Certificate of Survey shows monuments set on the south line of Section 33, filed in the office of Westwood Professional Services, Brainerd, Minnesota.

1999 MN/DNR Certificate of Survey shows south line of Section 33 based on Thiessen information, filed in the office of the Minnesota Department of Natural Resources, Brainerd, Minnesota.

2011 Westwood Professional Services, Inc. searched the area thoroughly, but did not find any evidence of the original corner monument or accessories. Contacted the Minnesota Department of Natural Resources, Cass County Surveyor's Office, Anderson Engineering, B.L.M, Morrison County Recorder's Office and Festler Land Surveying for information, but no additional information was found. Found three ½" iron pipe capped L.S. 17253, Bruce Grivna, apparently set by Comstock and Davis while conducting the 1992 survey (both surveyors worked for Comstock), on the south line of Section 33. Used Comstock and Davis computed Southwest Corner of Section 33 and a computed meander corner position distance of 99.0 feet from the southwest corner of Section 33 based on 1992 Comstock and Davis survey to compute Meander Corner Position. Found a ½" pipe capped L.S. 17253 as a witness corner to Meander Corner 11, since the MC falls in the Crow Wing River. Located found monument with VRS GPS observation. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument set by Westwood Professional Services, Inc is the best available evidence for the witness corner to Meander Corner #11.

(Witness Corner – iron pipe capped 17253)  
 Cass County Coordinates South Zone obtained by VRS GPS (NAD 83, 1996 Adj)  
 N:146024.99  
 E: 530076.52

(Meander Corner – falls in Crow Wing River)  
 Cass County Coordinates South Zone obtained by static GPS (NAD 83, 1996 Adj)  
 N:146027.35  
 E: 530018.17

(Meander Corner – falls in Crow Wing River)  
 Central State Plane Coordinate  
 N: 795775.32  
 E: 2599901.25