



A000583943

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/10/2012 9:08:42 AM

AS DOC #: A000583943

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


Index Number 2.0-25.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHEAST STANDARD Corner of Section 36, Township 141, Range 29
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 4-7-11 found a Falling apart concrete monument.
- left monument as found lowered monument removed monument (explain)
- On 4-7-11 placed on 3.5" Brass Capped monument. Cut off
CON. MON. flush and drilled hole in concrete and set out.

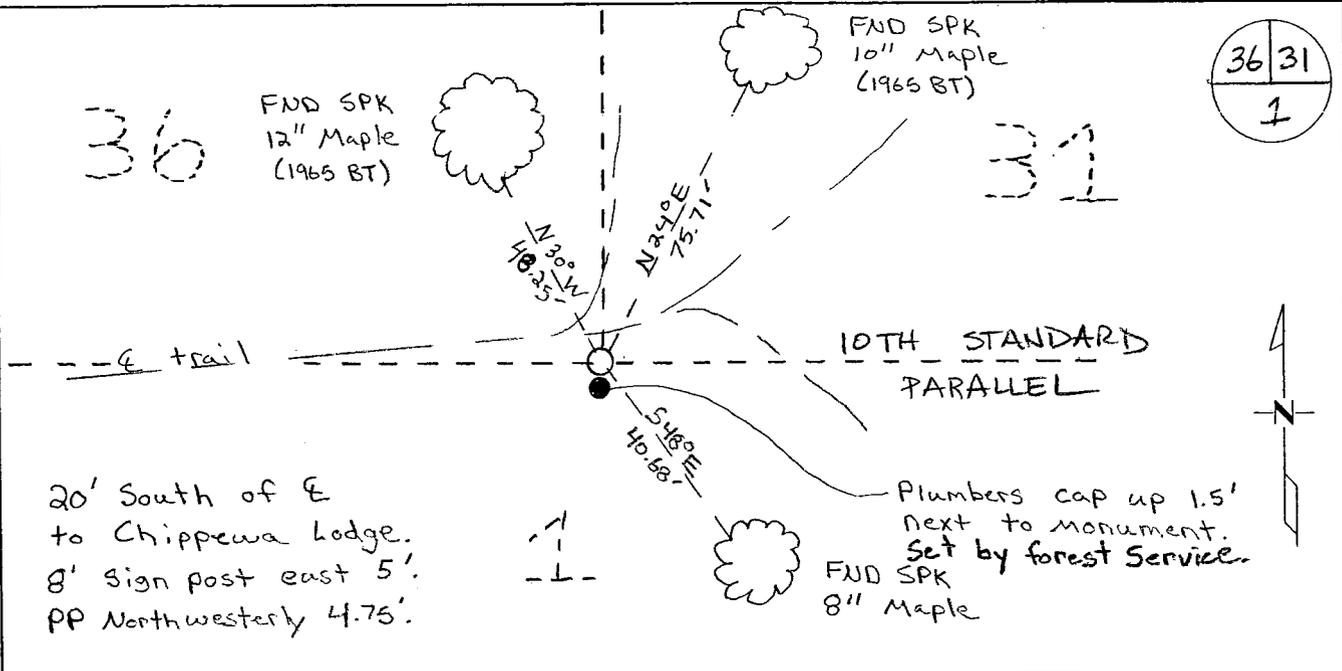

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hoglund
Chris Hoglund, PS
License No. 43932

Date: 7/19/12





Statement of Evidence:

Southeast Standard Corner of Section 36, Township 141 North, Range 29 West, Pine Lake Township, 5th Principal Meridian, Cass County, Minnesota.

- 1863 Original US General Land Office survey by Johnson and Thornton, set a wood post and bearing trees noted as:
 20" Yellow Pine N 17° W 54 links
 24" White Pine N 16° E 45 links
- 1912 John Curo found old Gov't B.T. stubs and set 2 1/2x45" Galv. I.P. w/3" cap and 1/2x2" rod as anchor and filed in County Book "A" Page 556-558, Survey Record No. 225, and also in Curo Book 69, Page 86-87. New reference ties:
 3" Birch N 25° E 19.14 feet
 10" Tall Birch Stump N 85° W 3.81 feet
- 1915 John Curo found iron w/cap and filed in Book "B" Page 169-177, Survey Record No. 278 and also in Curo Book 78, Page 8.
- 1915 G. Miller found galvanized iron pipe, filed in Curo Book 78, Page 9.
- 1918 GLO found 2" I.P. and both B.T. stumps (set no new corner) Entry from Certificate No. 516.
- 1940 Harold Curo found iron monument in place, filed in Curo Book 410, Page 85.
- 1965 U.S. General Forest Service found a 2 inch iron pipe and 1915 birch bearing tree. They set a 6 inch concrete monument with a brass cap in place of the existing 2 inch iron pipe. Reference ties:
 7" Maple N 24° E 75.7 feet
 8" Maple N 30° W 48.2 feet
 (Entry from Certificate Number 516)
- 1967 Bill Okerman, Licensed Land Surveyor Number 6807, filed corner certificate on June 28, with the Cass County Recorder as certificate number 516, using 1965 information.
- 1989 David Landecker, Registered Land Surveyor Number 17008, found concrete monument with a brass cap and county capped monument, filed Corner Certificate No. 311180, dated April 3, 1989. Reference ties:
 10" Maple N 30° W 48.25 feet (1965 BT)
 9" Maple N 24° E 75.71 feet (1965 BT)
 8" Maple S 48° E 40.68 feet
- 2002 County Surveyors Office found 2" ODIP with cap, up 1.2" and located it with GPS. Coordinates as follows from Cass County North 1996 adjustment:
 N: 164046.043 E: 483832.745
- 2011 Westwood Professional Services, Inc. found 1965 U.S. Forest Service Concrete Monument with brass cap busted in pieces and 1965 and 1989 reference Ties. Accepted concrete monument location as being a perpetuation of the original GLO Survey. Drilled hole in center of concrete monument and set a 5/8" x 24" Rebar with 3.5" Brass cap. Located set monument with GPS observation, and checked with VRS GPS shot. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc is the correct perpetuation of this corner.
- Cass County Coordinates North Zone obtained by static GPS (NAD 83, 1996 Adj)
 N: 164046.81
 E: 483832.02
- Central State Plane Coordinate
 N: 1049822.46
 E: 2616820.64