

AFFIDAVIT BY THE CASS COUNTY SURVEYOR IN REGARD TO AN AFFIDAVIT AS TO LOCATION OF A GOVERNMENT CORNER

STATE OF MINNESOTA }

}ss

COUNTY OF CASS }

Robert Kovanen, being first duly sworn, deposes and states as follows:

That Affiant is the County Surveyor in and for the County of Cass, in the State of Minnesota;

That in such capacity Affiant has knowledge of the books and records kept in the Office of the County Surveyor in and for the County of Cass, State of Minnesota;

That the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER has been found in the Surveyor's records and after checking with the Cass County Recorder, it was determined that the document was never assigned a document number and was never officially recorded in the real estate records or tracted in the tract indexes within said Cass County Recorder's Office;



-2-

That in order to make the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER a matter of public record and locatable by legal description, Affiant does herewith attach said document to this affidavit and requests the Cass County Recorder to record same at her earliest opportunity.

FURTHER, Affiant sayeth not.

Robert Kovanen, Cass County Surveyor

Subscribed and sworn to before me this 6th day of 58th, 20/Z.


ROBERT H. YOCHUM
Notury Public
State of Minnesoto
My Comm. Exp. 1-31-2015


Notary Public

This instrument was drafted by:

Robert Kovanen Cass County Surveyor P.O. Box 579 Walker, MN 56484

Southwest 1/16 Corner to Sec2		.T 	Y	.n		
State of Minneso	ta, (
County of Cass	∫ <i>88</i> .					
William H. ()kerm an		being first du	ly sworn, dep	poses and says:	
That I reside at Be		•				inder the
laws of the State of Minn I further depose and s	esota, having Surv say that on the	<i>veyor's Kegistra</i> 23rd	tion Certificate day of	August		19 63
found the South West	$\frac{1}{16}$ corner o	f section	26			
which was evidenced by James H. Flynn in 1	a 2 " diameter i .921•	iron pipe fro	om a survey	by Cass Co	unty Surveyor	
and that to perpetuate the consisting of a 61 diamediameter bronze tab	eter 60" long cy			ment, capp	ed with a 3" Tl\2N R26W SW 1/16 S 26	
consisting of a 61 diame diameter bronze tab	eter 60" long cy plet stamped:-	ylindri ca l co	oncrete monu	ment, capp	ed with a 3" Tl42N R26W	
consisting of a 61 diame diameter bronze tab	eter 60" long cy plet stamped:-	ylindri ca l co	oncrete monu	ment, capp	ed with a 3" Tl42N R26W SW 1/16 S 26 1963	
consisting of a 61 diame diameter bronze tab	eter 60" long cy olet stamped:-	ylindrical co	oncrete monu	ment, capp	ed with a 3" Tl42N R26W SW 1/16 S 26 1963	
consisting of a 61 diamed diameter bronze tab	eter 60" long cy olet stamped:- itness monuments	ylindrical co are located in t 1/16 BT	oncrete monu	ment, capp	ed with a 3" Tl42N R26W SW 1/16 S 26 1963	
consisting of a 6" diamediameter bronze table diameter bronze table from which reference or w	eter 60" long cy olet stamped:- witness monuments feet Scribed SW feet Scribed SW inches with red	ylindrical co are located in t 1/16 BT 1/16 BT top due west	oncrete monu	ment, capp	ed with a 3" Tl42N R26W SW 1/16 S 26 1963	
from which reference or w Elm 6" N40°E 22.8 f Ash 6" S63°W 71.0 f Cedar Post 4x4x60 i	eter 60" long cyclet stamped:- itness monuments of the Scribed SW feet Scribed SW inches with red in 54-2 attached.	vlindrical control of are located in the last of the last top due west	oncrete monu	ment, capp	ed with a 3" Tl42N R26W SW 1/16 S 26 1963	



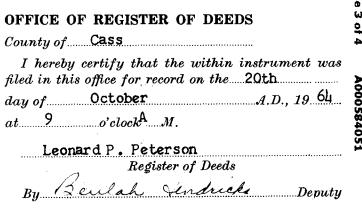



Page 4 of 4 A000584051

