






-2-


That in order to make the attached AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER a matter of public record and locatable by legal description, Affiant does herewith attach said document to this affidavit and requests the Cass County Recorder to record same at her earliest opportunity.

FURTHER, Affiant sayeth not.

  
\_\_\_\_\_  
Robert Kovanen, Cass County Surveyor

Subscribed and sworn to before me  
this 26<sup>th</sup> day of DEC, 2012.

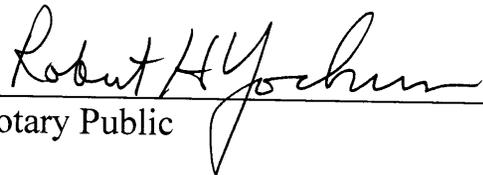  
\_\_\_\_\_  
Notary Public



This instrument was drafted by:

Robert Kovanen  
Cass County Surveyor  
P.O. Box 579  
Walker, MN 56484

## AFFIDAVIT AS TO LOCATION OF GOVERNMENT CORNER

Special meander corner South 1/16 line, West bank of Howard Lake

Corner to Sec. 30 T. 141 N R. 31 W No. ....

State of Minnesota, }  
 County of Cass } ss.

Peter J. Meyer, being first duly sworn, deposes and says:

That I reside at Cass Lake, Minnesota, and am registered as a Land Surveyor under the laws of the State of Minnesota, having Surveyor's Registration Certificate No. 3628

I further depose and say that on the 17th day of September, 1962, I found the special meander corner of Section 30 which was evidenced by a 1½ inch inside diameter iron pipe set by Cass County surveyor E. B. Horst in 1921. Survey recorded in County Record book "C" page 447, Cass County courthouse.

Pipe is in danger of falling into lake because of bank erosion so new monument is set West on 1/16 line.

and that to perpetuate the location of such corner I did, at the exact location thereof, place a permanent marker consisting of a 2 inch inside diameter, 5 foot long, galvanized wrought iron pipe filled with concrete and capped with a 3 inch diameter bronze tablet stamped:-

Note:

Monument is set 4.3 feet west of found SMC on the 1/16 line.

from which reference or witness monuments are located in the manner following:

T141N R31W  
 S 30 / S SMC  
 1962  
 RIS No. 3628

Ash 6 inch S7½°W 14.3 feet MKD SMC S30 BT

Ash 6 inch S57°W 19.85 feet MKD SMC S30 BT

Steel sign post 72 inches long set 24 inches in ground with signs 54-2 and 54-4 attached S67°W 2.06 feet.

All reference bearings are true bearings.

*Peter J. Meyer*  
 (Surveyor's Signature)

In the Presence of:

*Beulah Hendricks*

*June Ann Nelson*

Subscribed and sworn to before me at

Walker, Minnesota

this 3rd day of July, 1963

*Beulah Hendricks*  
 Notary Public

Deputy Register of Deeds  
 Cass County, Minnesota

## OFFICE OF REGISTER OF DEEDS

County of Cass

I hereby certify that the within instrument was filed in this office for record on the 3rd

day of July, A.D., 1963

at 9 o'clock A.M.

Leonard P. Peterson

Register of Deeds

By *Beulah Hendricks* Deputy



SECTION \_\_\_\_\_ TOWNSHIP \_\_\_\_\_ RANGE \_\_\_\_\_ P.M. \_\_\_\_\_

