

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 11, Township 140 N., Range 27 W., 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 11/29/12 found a 1/2" ID pipe with cap, RLS #17768, down 0.35'

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES NOT TO SCALE

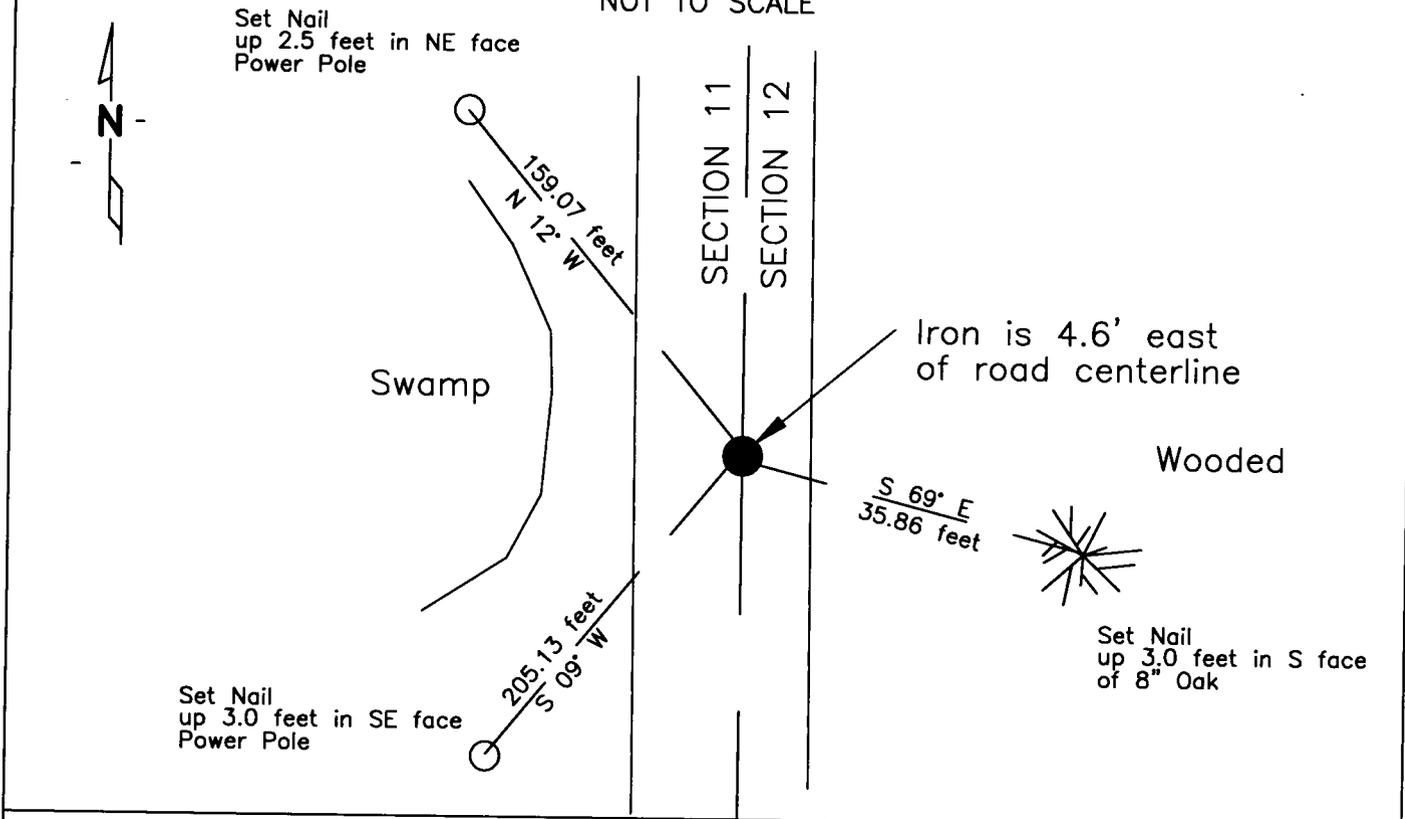

NAD83 (1996 ADJUSTMENT)  
CASS COUNTY NORTH DATUM

N= 155,546.725  
E= 541,665.028

Statement of evidence relative to  
this corner is on back of page

I hereby certify that this document and the  
data contained herein was prepared by me or  
under my direct supervision.

*Craig E. Johnson* 12/12/12  
Craig E. Johnson DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,



**A000589943**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

2/26/2013 8:25:10 AM

AS DOC #: **A000589943**

PAGES: **2**

REC FEES: **0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR Dep

Statement of Evidence:

G-21, East Quarter corner of Section 11, Township 140 North, Range 27 West, 5th Principal Meridian.

- Nov. 1873 F.G. Winston, General Land Office (GLO) Deputy Surveyors set a post for the original corner and referenced it as follows:  
8" Aspen S 18°15' E 67 links (44.2 feet)      5" W.Pine S 22° W 86 links (56.8 feet)
- Aug. 1909 John W. Curo, Transitman:, George Snell, Hiram Snell, Chainmen: Jake Smith, James E. Carey, Ben Vanasse, Axemen. County Book "A", Page 308-312, Survey Record No. 154, Surveyed from SE corner to the NE corner of Section 11, neasured 5276' and no mention of the East 1/4 corner of Section 11.
- Nov. 2012 G. Duerr found a 1/2" ID pipe capped #17768 Bolton & Menk accepted the found pipe as the corner and set reference ties set by CCSO in 2001, as depicted on the face of this certificate.