

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trottier*

PATRICK A. TROTTIER

Date: 3.06.13 License No: 41002  
41002



A000591529

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/15/2013 10:52:59 AM

AS DOC #: A000591529

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep \_\_\_\_\_

NORTHEAST Corner of Section 12, Township 133, Range 31, 5 P.M.

On 11-03-2011 found a 1/2"Ø IRON PIPE W/ CAP#11865, FLUSH


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

## SKETCH OF REFERENCE TIES

Corner Index: **E-25**

Not to Scale

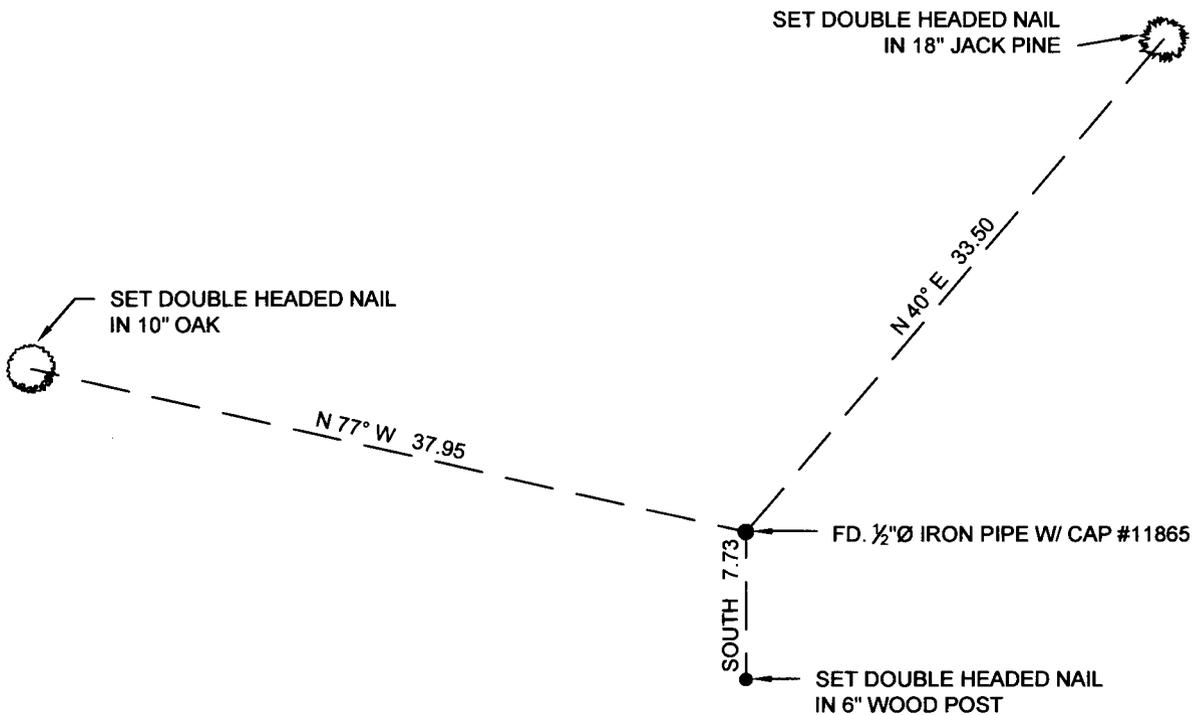

Statement of evidence for this corner position is on the back of this page



**Statement of Evidence**

**Northeast corner, Section 12, Township 133 North, Range 31  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1863 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

8" Tamarack	N 80° E	12 links
7" Tamarack	N 22° W	17 links
12" Tamarack	S 70° E	26 links
6" Tamarack	S 44° W	33 links

1912 – Township road order shows no survey.

2001 – Certificate of Survey signed by James W. Nielson, RLS 11865, shows found monument at corner position.

2011 – Patrick Trottier, PLS 41002, found and accepted a ½" pipe with cap stamped "11865", from which the following witnesses were established:

10" Oak	N 77° W	37.95 feet
18" Jack Pine	N 40° E	33.50 feet
6" Wood Post	SOUTH	7.73 feet