

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 3.06.13 License No: 41002
41002



A000591531

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/15/2013 10:53:01 AM

AS DOC #: A000591531

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR _____ Dep


EAST QUARTER Corner of Section 2, Township 133, Range 31, 5 P.M.

- On 11-03-2011 found a 1/2"Ø IRON PIPE W/ CAP#43932 - 50± EAST OF TRAIL, FLUSH
- left monument as found,
 lowered monument,
 removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: **C-21**

Not to Scale

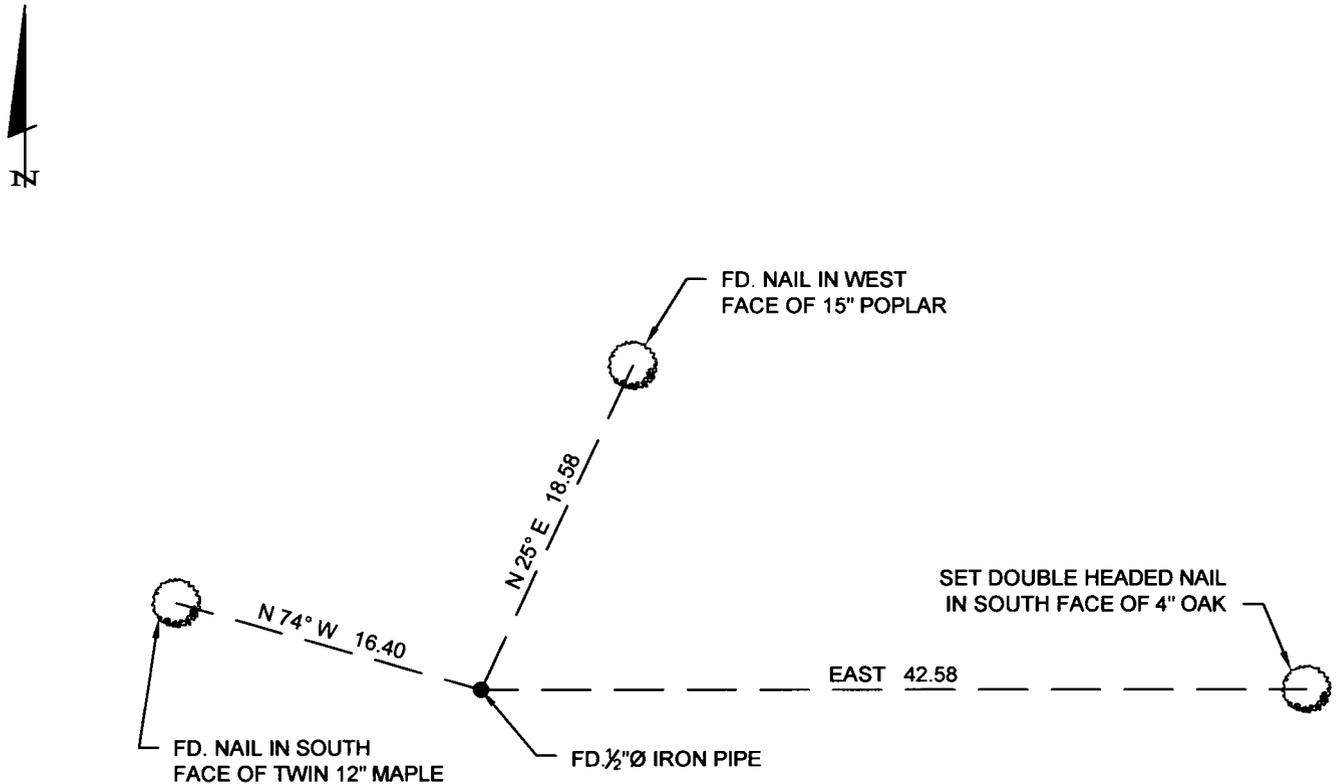

Statement of evidence for this corner position is on the back of this page

Page 1 of 2 A000591531



Statement of Evidence

East quarter corner, Section 2, Township 133 North, Range 31 West, 5th Principal Meridian, Cass County, Minnesota

1863 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

7” Tamarack	N 63° E	11 links
8” Spruce	N 88° W	10 links

2007 – Chris Hoglund, RLS 43932, performed survey in Section 1. Established corner position by single proportion method using SW corner of Section 1 and calculated position by proration of the NW corner of Section 1. Set ½” pipe with plastic cap stamped “RLS 43932”.

2011 – Patrick Trottier, PLS 41002, found and accepted the ½” iron with plastic cap stamped “RLS 43932”, from which the following witnesses were established:

15” Poplar	N 25° E	18.58 feet
12” Maple	N 74° W	16.40 feet
4” Oak	EAST	42.58 feet