

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trotter*

PATRICK A. TROTTER

Date: 3.06.13 License No: 41002  
41002



**A000591533**

**OFFICE OF THE COUNTY RECORDER  
 CASS COUNTY, MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON**

4/15/2013 10:53:03 AM

AS DOC #: **A000591533**

PAGES: **2**

REC FEES: **0.00**

**KATHRYN M. NORBY  
 CASS COUNTY RECORDER**

BY SR Dep

NORTHEAST Corner of Section 2, Township 133, Range 31, 5th P.M.

On \_\_\_\_\_ found a \_\_\_\_\_

left monument as found,     lowered monument,     removed monument (explain)


On 12-19-2011 placed a 1/2" IRON PIPE WITH PLASTIC CAP STAMPED "RLS #41002" AS WITNESS

CORNERS ON SECTION LINES RUNNING EAST AND SOUTH FROM CALCULATED CORNER

## SKETCH OF REFERENCE TIES

Corner Index: **A-21**

Not to Scale

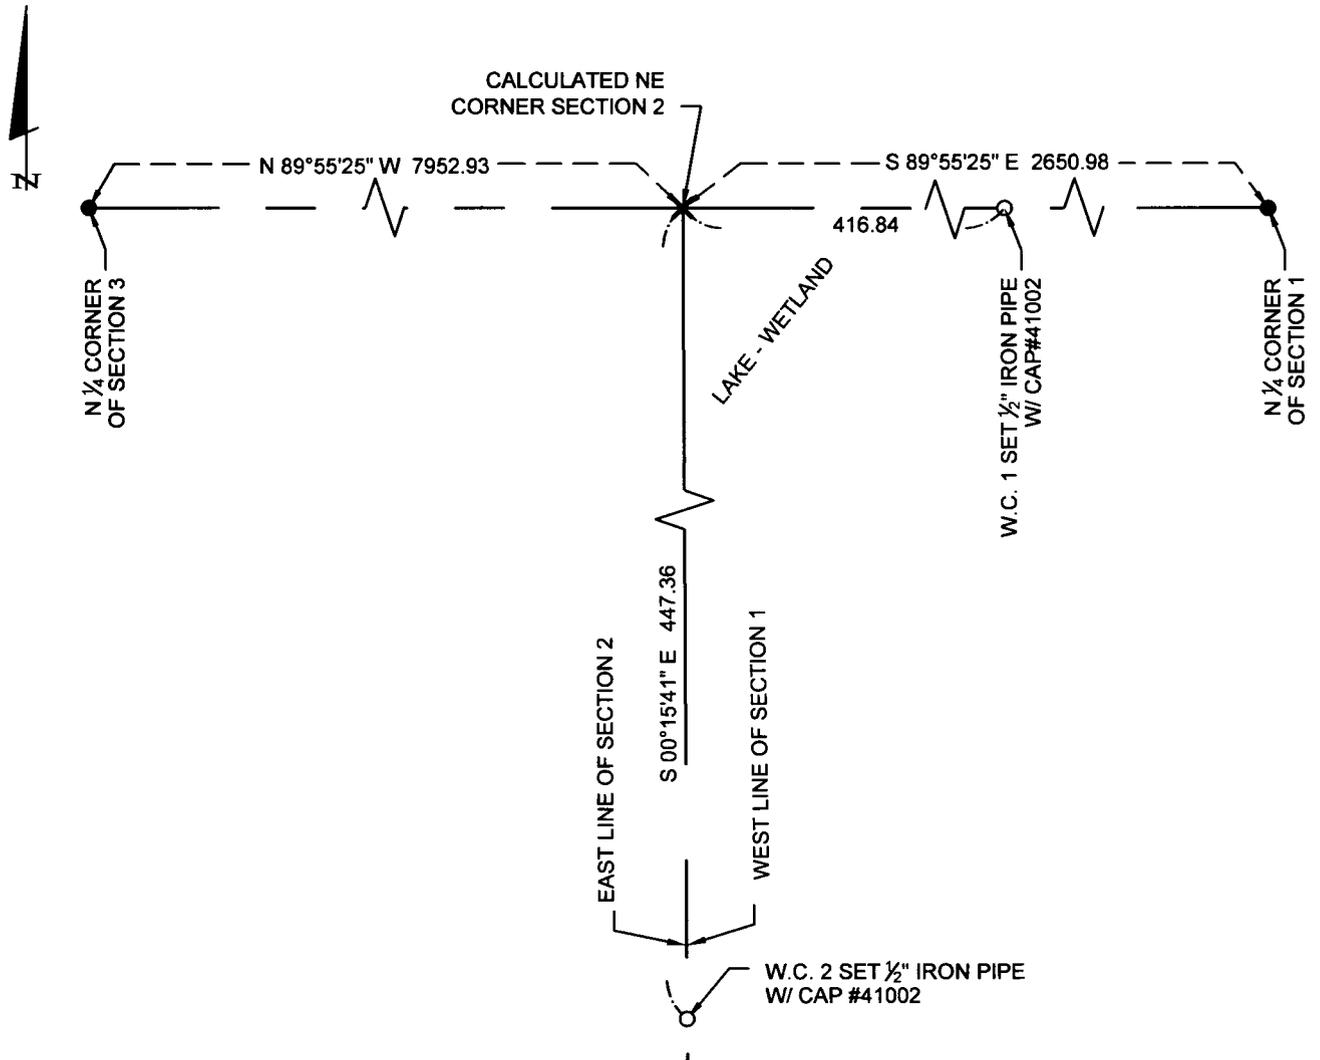

Statement of evidence for this corner position is on the back of this page

Page 1 of 2 A000591533



**Statement of Evidence**

**Northeast corner, Section 2, Township 133 North, Range 31 West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1858 – Original U.S. Government Survey establishing this corner position was performed. Physical corner fell in small lake and nothing was set in its location. A witness corner was set 3.50 chains east with the following accessories:

- 6” Tamarack    S 45° W      44 links
- 12” Pine        S 17° E      39 links
- 8” Pine         N 74° E      78 links

A second witness corner was set 5.84 chains south with the following accessories:

- 9” Pine         S 46 3/4° W   41 links
- 7” Aspen        S 37 1/2° E    39 links

1930 – John Greene, in Curo Book 96, Page 142, finds no evidence of 1858 witness corners. Establishes a position for this corner by single proration between NE corner Section 1 and NE corner Section 3, said township, with resulting distance of 2647 feet along north line of quarter-sections. No physical corner or witnesses were established.

2011 – Patrick Trottier, PLS 41002, searched and found no evidence of the corner nor its witness corners and accessories. Its position is calculated by single proration between found and accepted North quarter corner of Section 1 and the North quarter corner of Section 3, both in Township 133 North, Range 31 West. Calculated position lies 2650.49 feet from found North quarter-corner of Section 1, and falls in small lake. Set two witness corners being 1/2” iron pipes with plastic cap stamped “RLS 41002” on sections lines east and south of calculated position of Northeast corner. Bearings and distances from corner position to witness corners are as follow:

- W.C. 1    S 89°55’25”E    416.84
- W.C. 2    S 00°15’41”E    447.36