

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 4

Township 138 N, Range 32 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF Cass



A000591919

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/26/2013 11:00:10 AM

AS DOC #: A000591919

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 10/15/2012, found a(n): MN/DOT Telspar Monument up
2.0' in Swamp

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

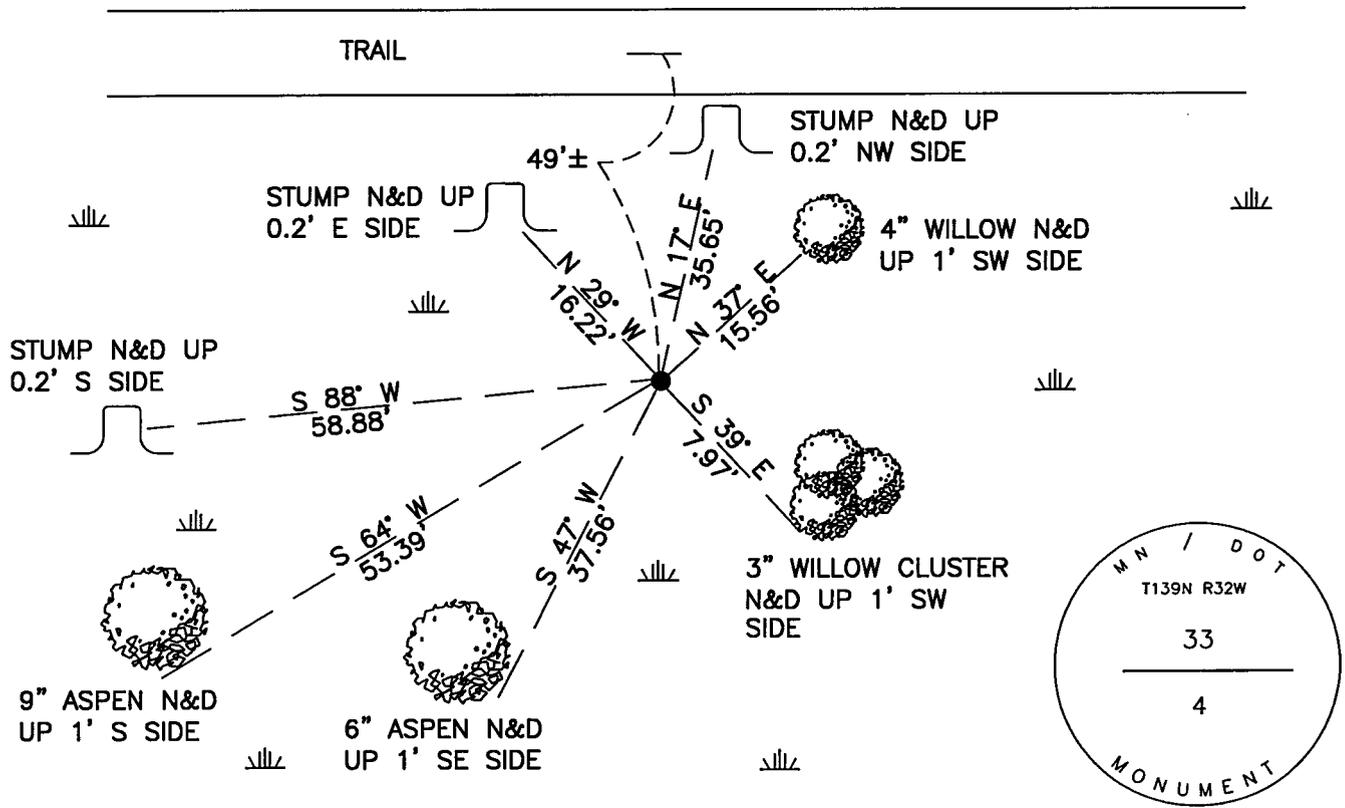

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 336326.82

Easting: 433066.77

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

3-11-13
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000591919

**Statement of Evidence*****North Quarter corner Section 4, Township 138 North, Range 32 West, Cass County Minnesota***

- 1860 The Original Survey was run and a post was set to mark the corner with the following accessories: 4" Tamarack S 50 W 152 links and a 5" Tamarack N 13 1/2 E 352 links.
- 1997 K. Donaghue, Minnesota Department of Transportation, set a 2" square steel tube with aluminum cap at lost position and filed a Certificate of Location as Document # 433373. The following ties were made: 5" Aspen N 17 E 35.65', 4" Aspen S 64 W 53.39', 4" Aspen S 88 W 58.88, 3" Aspen N 29 W 16.22' and a steel sign post South 1.0'.
- 2012 Kadrmas Lee & Jackson field crews searched the area and recovered the 2" square steel tube with aluminum cap and also recovered a 9" Aspen S 64 W 53.39', a steel fence post South 1.0' and three aspen stumps with N/D from the 1997 ties. The following ties were made: 6" Aspen S 47 W 37.56', 4" Willow N 37 E 15.56', and a 3" Willow Cluster S 39 E 7.97'.
- 2012 Jarrett Leas, RLS 42619, after analysis of record and survey information accepts this monument as the true location of the corner.

Contacts pertaining to this corner are as follows:

Cass County Surveyor's Office
Cass County Recorder's Office
Cass County Engineer's Office
MN Department of Natural Resources
MN Department of Transportation
Bruce Skipton RLS 17768