



A000592111

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/2/2013 11:50:42 AM

AS DOC #: A000592111

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep

Page 1 of 2 A000592111


Index No. \_\_\_\_\_ L-9

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 17, Township 134, Range 32  
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On 4/12/11 found a 1/2" I.D. IRON PIPE DISTURBED AND LYING LOOSE ON THE  
DATE  
GROUND NEAR THE CORNER LOCATION  
 left monument as found,  lowered monument,  removed monument (explain)
- On 4/12/11 RESET THE FOUND 1/2" I.D. IRON PIPE MIDWAY AND ON LINE  
DATE  
BETWEEN THE NORTHEAST CORNER AND THE SOUTHEAST CORNER

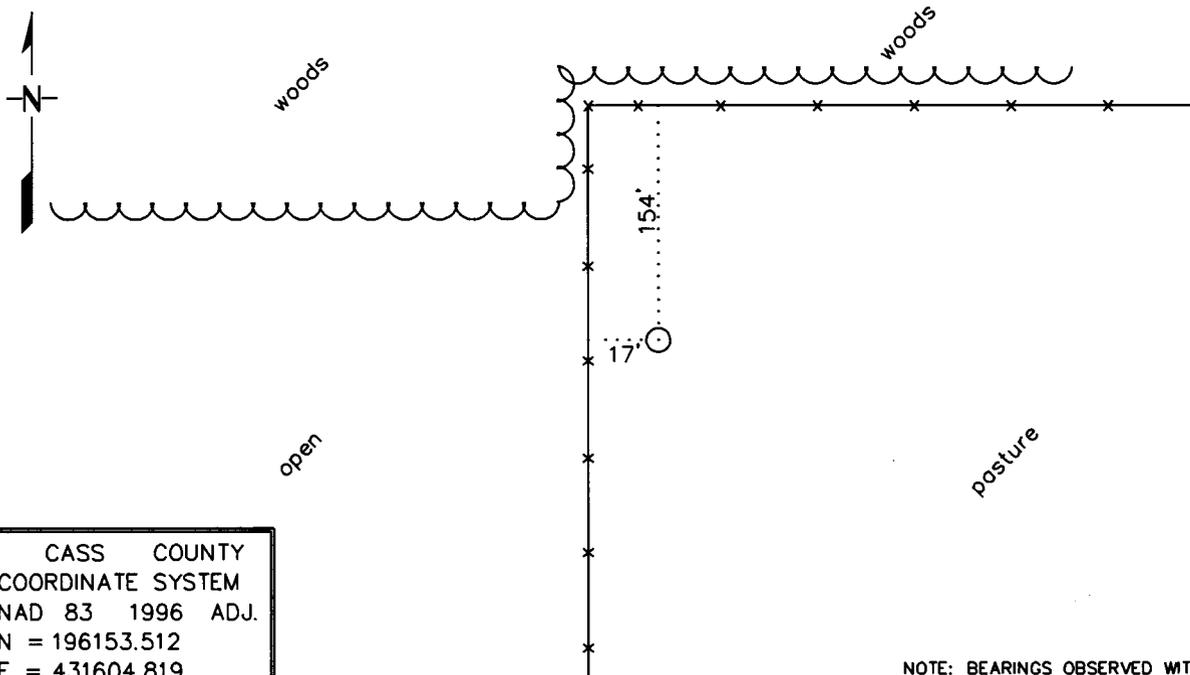

CASS COUNTY  
COORDINATE SYSTEM  
NAD 83 1996 ADJ.  
N = 196153.512  
E = 431604.819

NOTE: BEARINGS OBSERVED WITH A COMPASS.

Statement of evidence for this corner location is on back of this page.

RAL - JUNE 2011  
FOM01910.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE *Kathryn M. Norby* DATE 4/24/13 License Number 47461

Title:  Land Surveyor  County Surveyor

STATEMENT OF EVIDENCE**East Quarter Corner of Section 17, Township 134 North, Range 32 West, 5<sup>th</sup> P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

Cass County Recorder  
 Cass County Surveyor  
 Cass County Highway Dept.  
 Westwood Professional Services - Brainerd  
 Carnell Land Surveying, LLC  
 Arro of Park Rapids, LLC  
 Nyberg Surveying  
 Festler Land Surveying  
 Kramer Leas Deleo, PC  
 Widseth Smith Nolting - Baxter

1870 This corner was established by the Government Land Office. A post was set to mark the corner and was witnessed by the following bearing trees:

B. Pine	5"	N36°E	28 links
B. Pine	8"	S44°W	12 links

2005 Information obtained from Westwood Professional Services in Brainerd show this corner to be Lost. They set the corner and marked it with an iron monument midway and on line between the northeast and southeast corners of the Section, 14' east of a meandering north-south fence line. A distance of 2683.21' was measured to the north and south.

2011 In April, the DNR survey crew made a search for evidence of the corner and found a ½" iron pipe disturbed and lying loose on the ground in the vicinity of the corner location. After analysis, the corner was established at a lost position, on line and midway between the northeast and southeast corners of the Section. A ½" inside diameter iron pipe was set to mark the corner location. The DNR measured a distance of 5358.52' between the Northeast and Southeast corners of Section 17 compared to a distance of 5366.42' as measured by Westwood.

Northeast Corner Section 17 bears N00°09'55"E 2679.26'  
 Southeast Corner Section 17 bears S00°09'55"W 2679.26'

For more information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

