

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Meander Corner of Section 9, Township 139 N., Range 26 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 05/01/13 found Nothing
- left monument as found, lowered monument, removed monument (explain)
- On 05/01/13 Set 1/2" ID Iron Pipe with Cap # 44530, Up 0.1'
DATE As Reference to the Meander corner

SKETCH OF REFERENCE TIES NOT TO SCALE

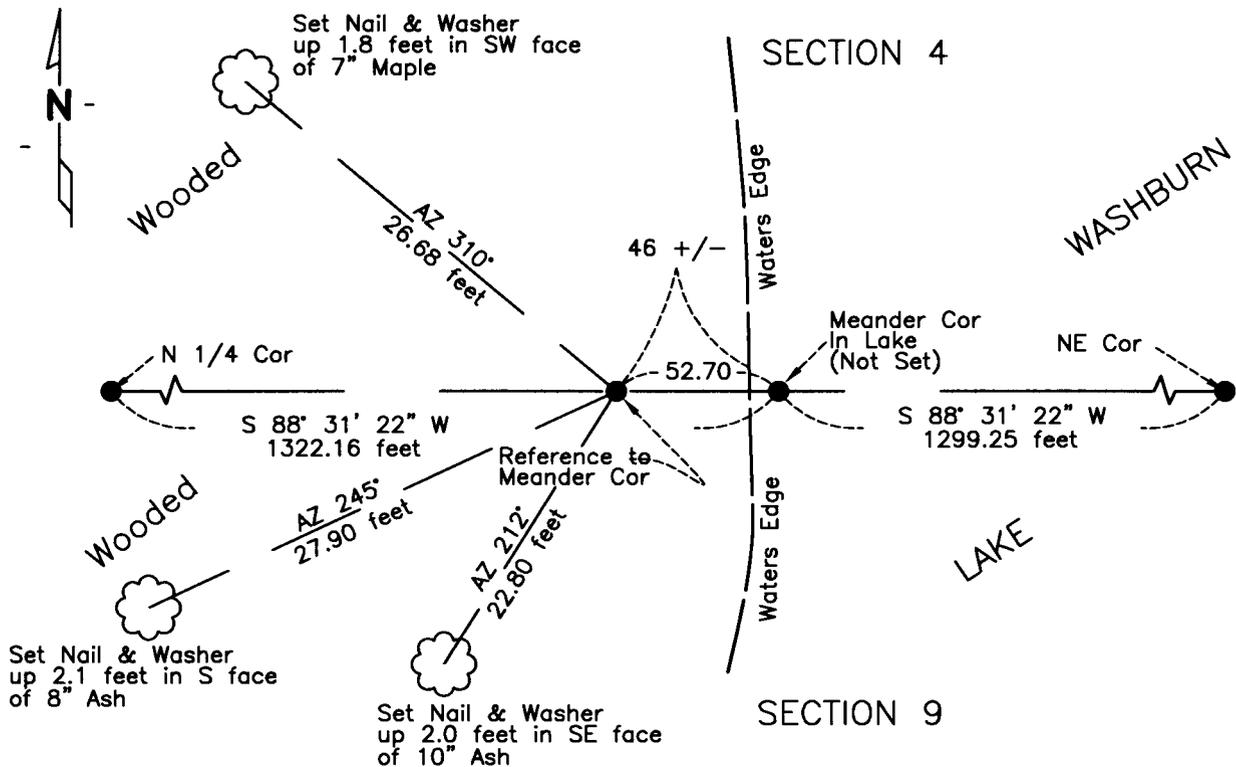

NAD83 (1996 ADJUSTMENT)
CASS COUNTY NORTH DATUM

N= 126519.272
E= 561007.980

Statement of evidence relative to
this corner is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Craig E. Johnson 05/22/13
Craig E. Johnson DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,



A000593574

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

6/17/2013 12:42:58 PM

AS DOC #: **A000593574**

PAGES: 2
REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000593574

Statement of Evidence:

E-12.1, Meander corner of Section 9, Township 139 North, Range 26 West, 5th Principal Meridian.

1863 Alonzo L. Thornton, General Land Office (GLO) Deputy Surveyor set a post for the original corner and referenced it as follows:

5" Elm S 40° W 20 links (13.2 feet) 6" Pine N 60° W 40 links (26.4 feet)

Dec. 2011 Bruce Skipton, Registered Land Surveyor No. 17768, References the S 1/4 corner and the SE corner of Section 4 as depicted on a Certificate Of Survey of Government Lot 7 on file at the Cass County Recorders Office.

May 2013 J. McDonald found no evidence of Meander corner and set 1/2" ID Iron Pipe with cap number 44530 as a reference to the Meander corner position. Bolton & Menk computed the position of the meander corner by single proportion between the N 1/4 corner and the NE corner of Section 9. Reference ties set by Bolton & Menk, as depicted on the face of this certificate.