

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner of Section 19, Township 134 N., Range 29 W., 5th P.M.  
 State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 19 May 2005 found a 8 inch by 8 inch Granite Stone, down 1.2 feet  
in sand mound, 43 feet ± from lake shore

left monument as found     lowered monument     removed monument (explain)

On 19 May 2005 placed a 1 inch by 12 inch Aluminum Monument with  
a 3.25 inch Aluminum cap, on top of Stone.

## SKETCH OF REFERENCE TIES NOT TO SCALE

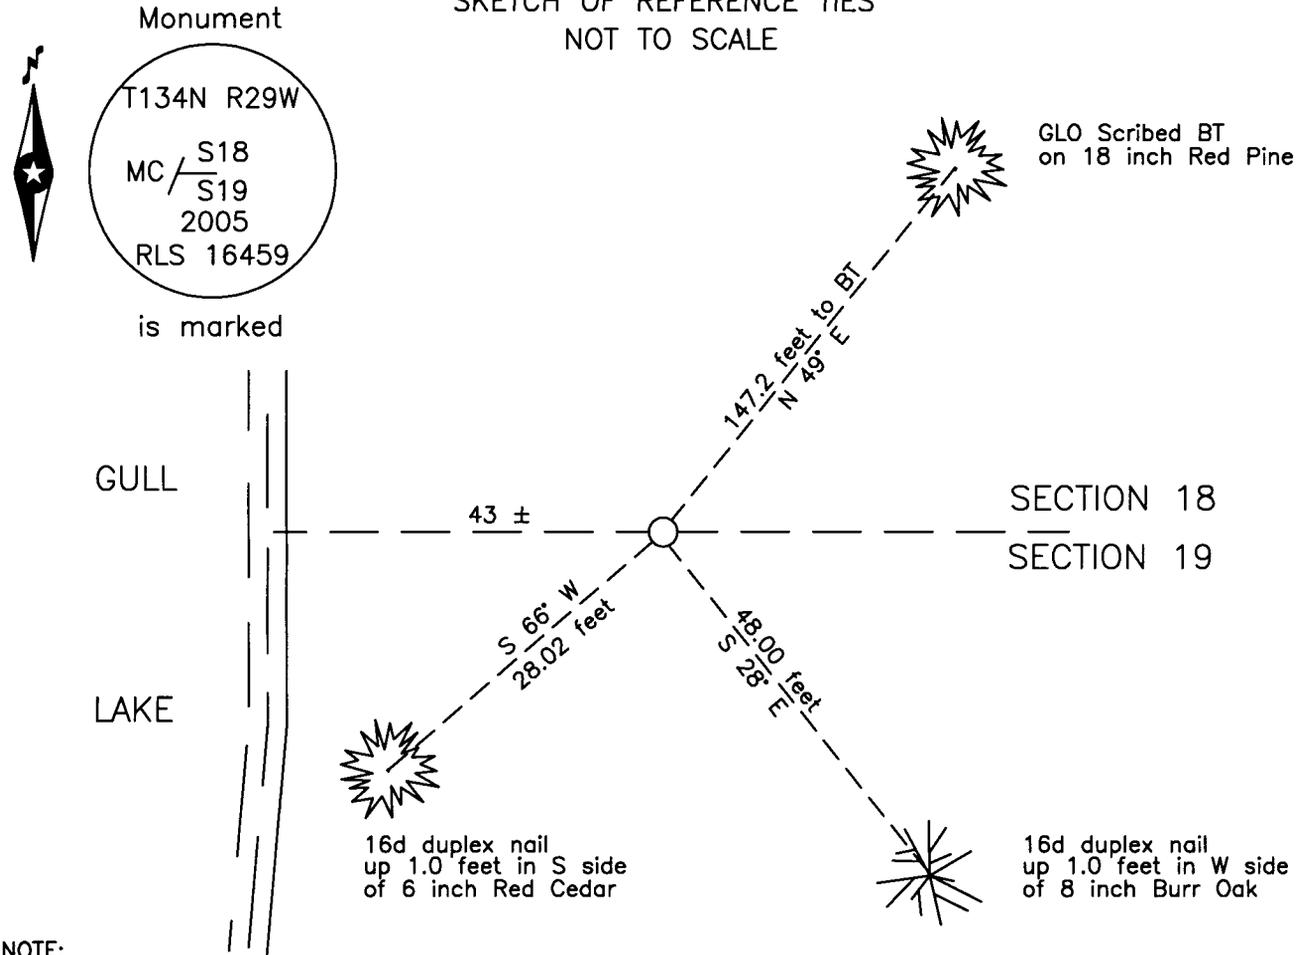

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Terry L. Freeman*  
 Terry L. Freeman, Cass County Surveyor  
 Date 7/24/13 MN License No. 21367



**A000594820**  
 OFFICE OF THE COUNTY RECORDER  
 CASS COUNTY, MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON

7/25/2013 3:07:35 PM  
 AS DOC #: A000594820  
 PAGES: 2  
 REC FEES: 0.00

KATHRYN M. NORBY  
 CASS COUNTY RECORDER  
 BY SR Dep

Page 1 of 2  
 A000594820



**Index No. 13429N.0-04.1**

Statement of Evidence

**Meander corner Sections 18 and 19, Township 134 North, Range 29 West, 5th Principal Meridian.**

July 1912      W.Hoffman, General Land Office (GLO) Surveyor set a 18 x 8 x 8 inch granite stone for the original corner and referenced it as follows:  
11" N.Pine      N 49° E      223 links (147.2 feet)      9" Pine      S 45°15' E      77 links (50.8 feet)  
Said records are on file with the Secretary of State, St. Paul, Minnesota, copies are on file at the Cass County Surveyor's Office (CCSO).

Jan. 1926      P.Hale, Civil Engineer and Surveyor, Replat of Pine Beach, recorded in the Cass County Recorders Office (CCRO), as Document Number 83653, graphics indicates the Meander Corner in place.

July 1926      D.Anderson, LS 3091, Auditor's Plat of Pine Beach, recorded in the CCCRO as Document Number 145347, graphics indicates "Stone Monument U.S. M.C." in place.

May 2005      B.Hippen, CCSO technician, found the NE 1912 BT and granite stone, 1.2 feet below ground, 43 feet more or less, from the shore of Gull Lake. Placed a 1 inch by 12 inch Aluminum pipe with 3.25 inch Aluminum cap on top of stone.

July 2013      B.Hippen, CCSO technician, found the 2005 monument in good condition and add one new witness tree. The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCSO in 2005 is the correct perpetuation of this corner.