

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 20, Township 140N, Range 29W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
Date _____

left monument as found lowered monument removed monument (explain)

On 06/11/2013 placed a 3/8" REROD WITH RLS CAP NO. 17774, CL OF TRAIL
Date _____

SKETCH OF REFERENCE TIES

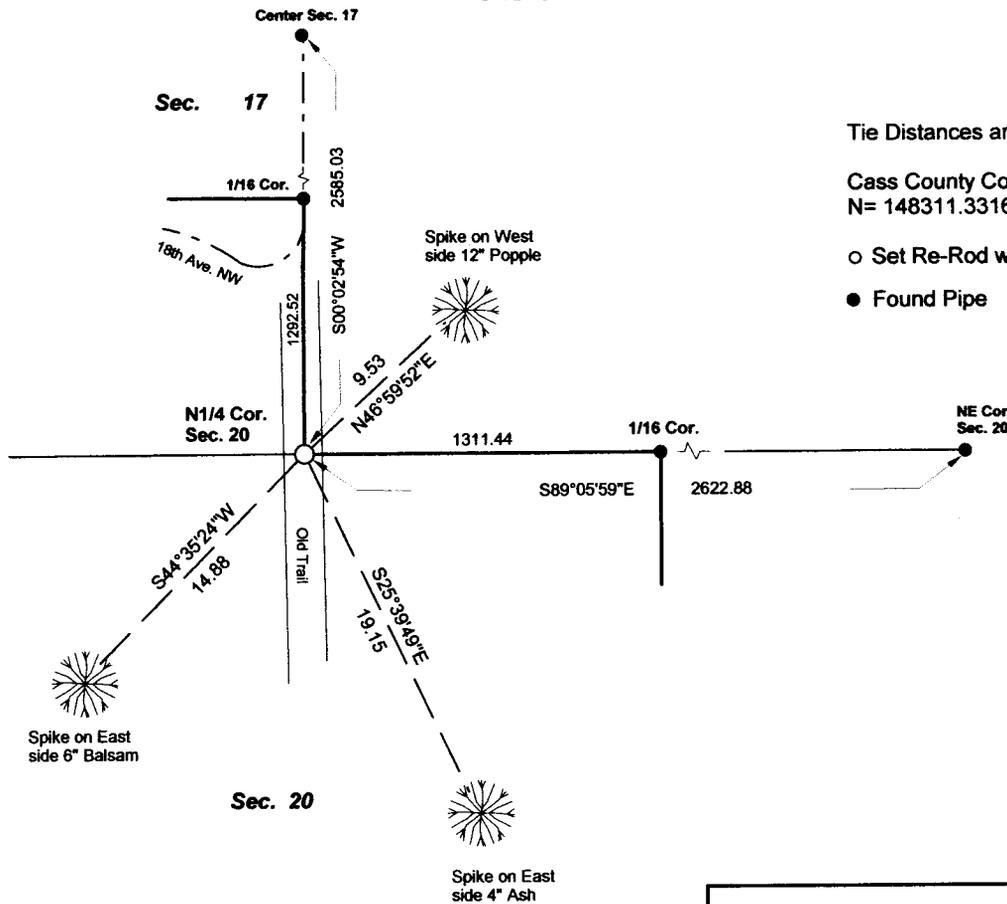

Tie Distances are measured to the spikes.

Cass County Coordinate System (North Zone)
N= 148311.3316 E= 460744.2605

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R Kohout 22 July 2013
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000594828

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

7/25/2013 3:07:43 PM

AS DOC #: **A000594828**

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep

Page 1 of 2 A000594828



INDEX NO. N.0 – 7.0

STATEMENT OF EVIDENCE

NORTH QUARTER CORNER OF SECTION 20, TOWNSHIP 140N, RANGE 29W, 5TH P.M.

JAN 1870 ORIVILLE SMITH, DEPUTY GOVERNMENT SURVEYOR, SET A POST TO
MARK THE CORNER LOCATION. REFERENCES:
5" FIR S20E 16 LINKS 6" JACK PINE N19E 51 LINKS

MAY 1920 MOSE MORRIS, SET TEMPORARY POINT CURO BOOK NO. 165 PAGE 7

JUNE 1920 LINCOLN MACKEY AND ELMER B. HORST, LS NO. 376, SET 2" X 48" IM,
CURO BOOK NO. 165 PAGE 13, ALSO SKETCH IN CURO BOOK NO. 170B
PAGE 14 SHOWS PARTIAL SUBDIVISION OF SECTION 17.

MAR. 1977 CURO BOOK NO. 165 PAGE 58 INDICATES A PIPE SET WITH REFERENCES:
30" W. PINE N45E 66.42 FEET 5" R. OAK WEST 21.75 FEET
8" ASH S60W 22.79 FEET.

MAR. 1977 WALT E. CURO, LS NO. 11395, ON HIS CERTIFICATE OF SURVEY INDICATES
HE SET AN IRON MONUMENT, CCSO DOCUMENT NO. 6431 AND COUNTY
RECORDER DOCUMENT NO. 1890.

JUNE 2013 MARVIN R. KOHOUT, LS NO. 17774, KOHOUT LAND SURVEYING FOUND AN
IRON MONUMENT AT THE CENTER OF SECTION 17, TWP. 140, RGE 29 AND
AN IRON MONUMENT AT THE NORTHEAST CORNER OF THE SE1/4 – SW1/4 SEC.
17. THE N1/4 CORNER OF SECTION 20 WAS SET BY CONTINUING THIS LINE AND
DOUBLING DOWN THE DISTANCE. A 3/8" REROD WITH CAP NO. 17774 WAS SET
AT THIS LOCATION TO MARK THE N1/4 CORNER OF SECTION 20.

Handwritten signatures and notes at the bottom of the page.