

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 22
Township 139 N , Range 27 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000595694

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

8/22/2013 9:17:27 AM

AS DOC #: A000595694

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY KF Dep


On 1/9/2013, found a(n): 1 1/2" Iron Pipe up 1.0' on
South Side of East-West Road and 15'± South of ☐.

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

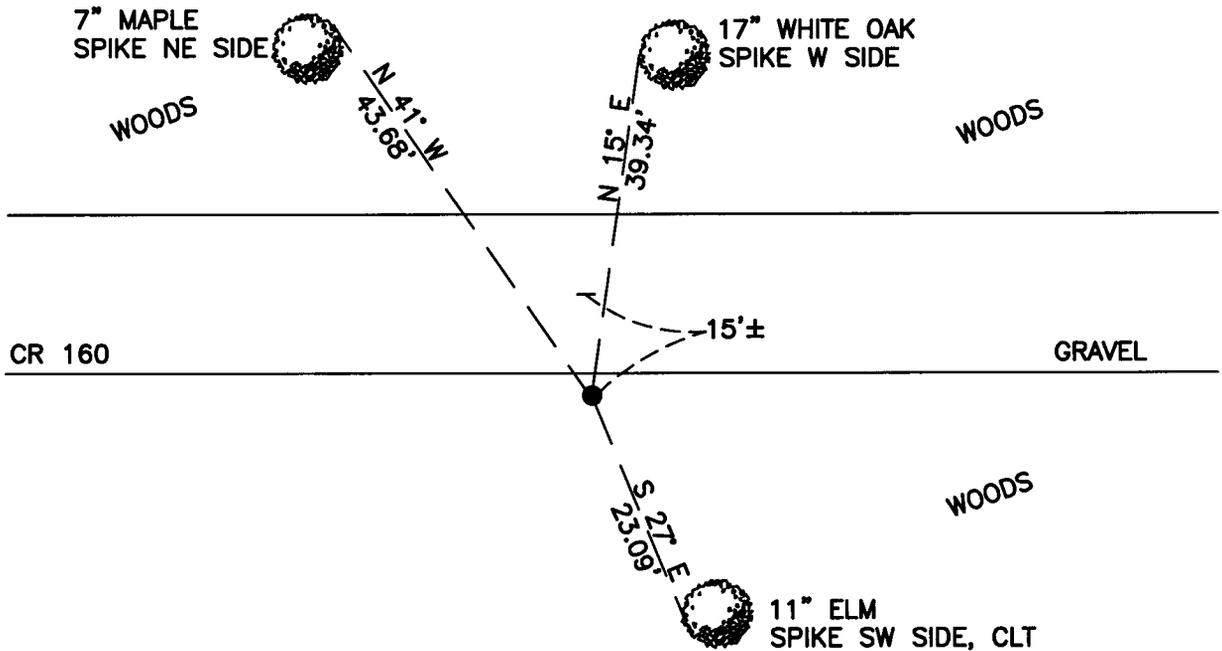

WOODS

15	14
22	23



"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 352048.679

Easting: 598974.937

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

4-30-2013
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000595694



Statement of Evidence

Northeast corner of Section 22, Township 139 North, Range 27 West, 5th Principal Meridian.

- 1864 The US General Land Office, in notes of the subdivision of Township 139 North, Range 27 West, set a post for the original corner and referenced it as follows:
- | | | | | | |
|-------------|---------|----------|-------------|---------|----------|
| 6" W. Pine | N 57° E | 42 links | 14" Y. Pine | N 55° W | 43 links |
| 28" W. Pine | S 15° E | 86 links | Aspen | S 10° W | 83 links |
- Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 1936 CCC Washburn Lake field book no. 7, page 14, on file at the DNR office in Brainerd show CCC personnel chained 80 chains from the east. They set a 3" Oak stake to mark this corner position.
- 1937 CCC Washburn Lake field book no. 1, page 22, on file at the DNR office in Brainerd show CCC personnel found a 4" square stake and a W. Pine stump. Book no. 8, shows they found the stumps of NE, NW, and SE bearing trees and set a 1½" x 54" iron pipe with a 2 ¼" stamped cap 2' above ground noting the tie to the swamp to east checks.
- 1938 CCC Washburn Lake field book no. 20, titled "Setting Road Control T139-R27", unlisted page number, on file at the DNR office in Brainerd show CCC personnel set a control post at corner on the south side of the road.
- 2013 A KLJ survey crew found a 1 ½" iron pipe, and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.