

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness to the East Quarter Corner of Section 1
Township 139 N , Range 25 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000596384

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/13/2013 10:35:24 AM

AS DOC #: A000596384

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep



On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 4/10/2013, set a(n): 5/8" X 48" Rebar with Plastic Cap Stamped "Leas MN 42619" up 1.0', Monument was Set Online Between the SE and NE Corners of Section 1.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

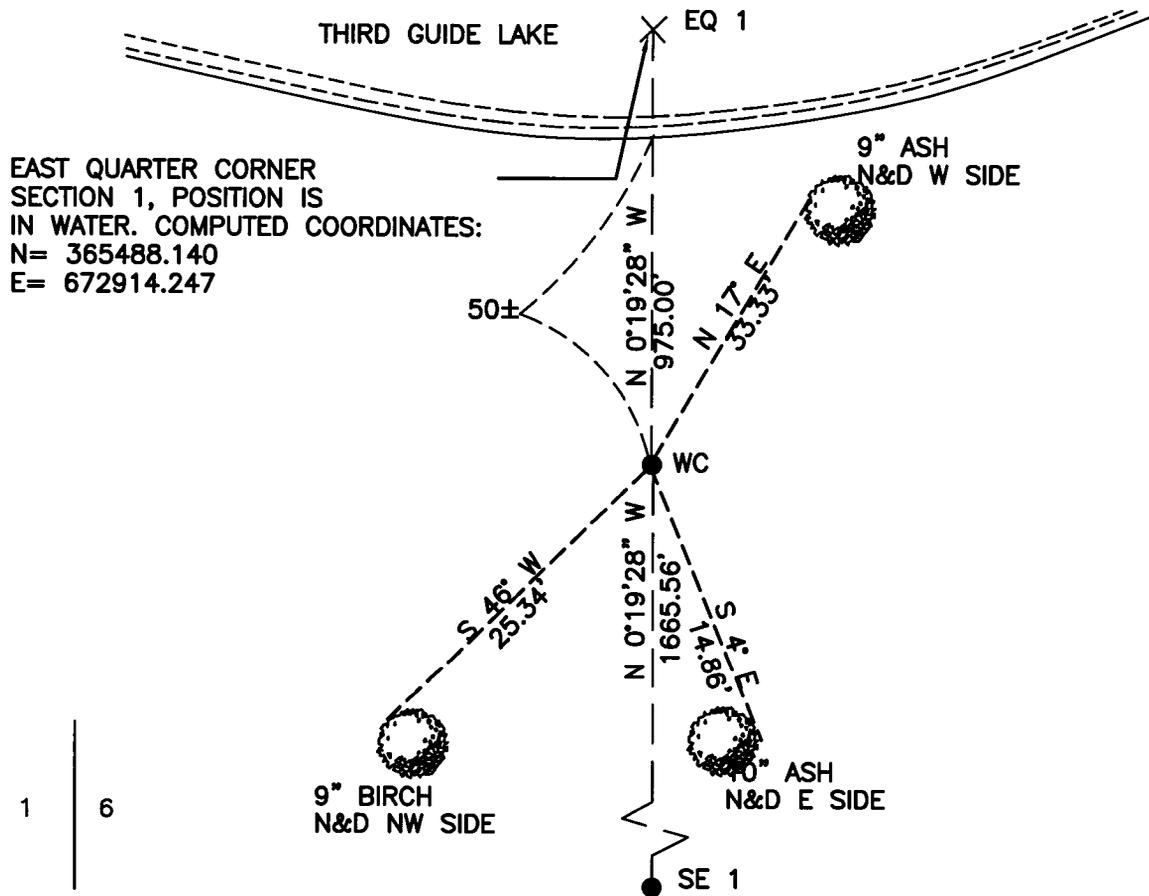

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 364513.156

Easting: 672919.768

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

5-31-13
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000596384

Statement of Evidence**Witness to the East Quarter corner of Section 1, Township 139 North, Range 25 West, 5th Principal Meridian on the 3rd Guide Meridian.**

- 1863 The US General Land Office, in the notes of the 3rd Guide Meridian between the 9th and 10th Parallels, set a post for the original Meander Corner #2 at 27 chains north and referenced it as follows:
7" W. Maple S 15° W 102 links
15 chains were measured across ice and a post was set for Meander Corner #1 and referenced by the following:
6" Pine N 60° W 112 links
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 2013 KLJ field crews searched the area and find no evidence of the south MC or the north MC on the east line of Section 1. The GLO notes of the 3rd Guide Meridian indicate a Meander Corner was set at 27 chains north of the southeast corner of Section 1. The GLO line continued north along the east line across ice and set a Meander Corner 15 chains north. This section is considered to be a closed section, therefor; a lost position was computed by proportional measurement for the East Quarter corner between the NE and SE section corners. A 5/8"x48" rebar with plastic cap stamped "Leas MN 42619" was set on line between the NE and SE section corners to mark the witness corner position and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.