

Page 1 of 2 A000596598

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trottier*

PATRICK A. TROTTIER

Date: 9-03-13 License No: 41002  
41002



**A000596598**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

9/20/2013 9:22:50 AM

AS DOC #: A000596598

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR \_\_\_\_\_ Dep

Northeast Corner of Section 4, Township 141 North, Range 30 West, 5th P.M.

On 3-25-2013 found a GLO iron with 3" brass cap flush with ground


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

## SKETCH OF REFERENCE TIES

Corner Index: **A-13**

Not to Scale

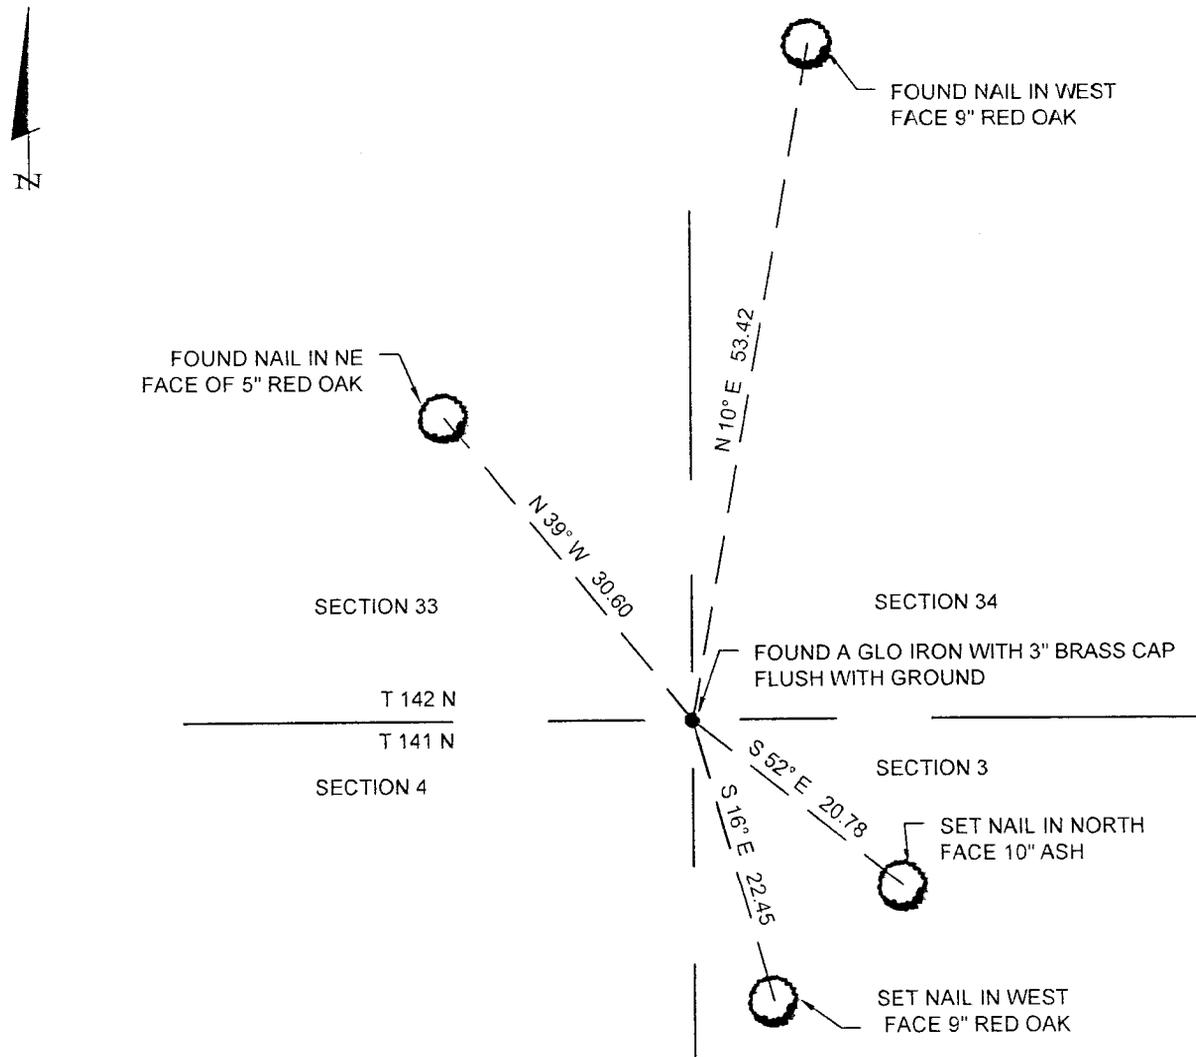

Statement of evidence for this corner position is on the back of this page



### Statement of Evidence

#### **Northeast corner, Section 4, Township 141 North, Range 30 West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1873 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

18" Y. Pine	N 51° E	91 links
20" Y. Pine	N 88° W	111 links
32" Y. Pine	S 86° W	151 links

1917 – A.N. Kimmell, GLO surveyor, in T142N R39W Field Notes, page 23, found the following two stumps of 1873 survey and recorded measurements as follow:

24" Y. Pine stump	N 49 1/2° E	91 links
24" Y. Pine stump	N 87° W	152 links

From these witnesses, he set a 2" x 36" pipe with brass cap in SW corner of a clearing and established the following witnesses:

10" W. Oak	S 73 1/2° W	197 links
10" W. Oak	N 68 3/4° W	279 links

2000 – R. Main, USFS surveyor, in T142N R30W Book 2, page 2, found the GLO iron, up 4", in good condition. Found no evidence of 1917 witness trees. Noted steel posts found South 4.4 feet and East 3.35 feet, and added the following witnesses:

5" R. Oak	N 39° W	30.60 feet
9" R. Oak	N 10° E	53.42 feet
10" Ash	S 52° E	20.78 feet
9" R. Oak	S 16° E	22.45 feet

2013 – Patrick Trottier, PLS 41002, found GLO iron, the 2000 witnesses and steel posts. Accepted iron as corner.