

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 34
Township 138 N . Range 32 W . 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS.



A000596606

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/20/2013 9:22:58 AM

AS DOC #: A000596606

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

On 5/12/2010 . found a(n): 1/2" pipe
with RLS cap 17253 down 6 inches, bent badly.


- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 5/12/2010 . set a(n): 1/2" Iron pipe capped
"Leas 42619" down 6 inches.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

Section 27-138-32

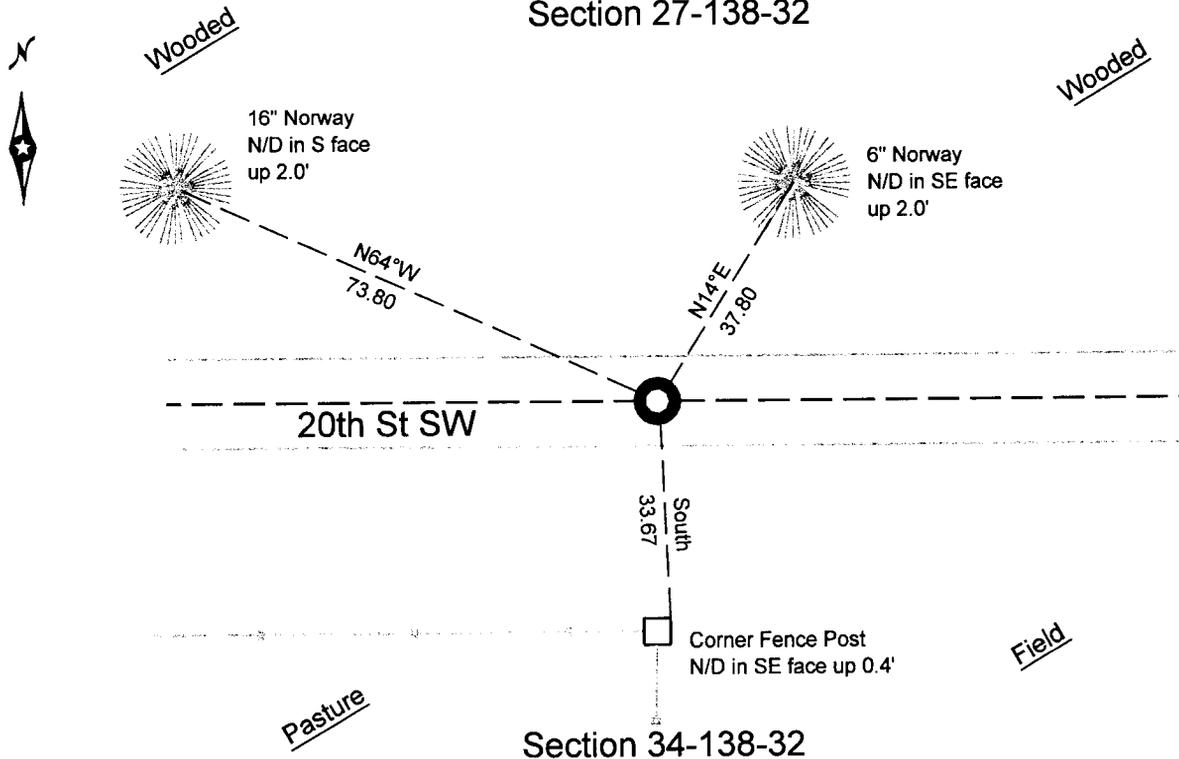

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY COORDINATES, SOUTH ZONE

Northing: 309693.151

Easting: 438238.106

NAD 83. HARN 1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota

James Kramer
signature

7-11-2013

Date

James Kramer, Minnesota License No. 23668

Page 1 of 2 A000596606

**Index No. 13832V.0-15.0**Statement of Evidence**North Quarter Corner of Section 34, Township 138 North, Range 32 West, 5th Principal Meridian.**

- 1870 Wood Post set to mark the corner, and referenced as follows:
14" Norway Pine S 49 deg. W 27 links (17.82 feet)
16" Norway Pine N26 deg. W 53 links (34.98 feet)
Said records are on file with the Secretary of State, St Paul, Minnesota, copies are filed With the Cass County Surveyor's Office (CCSO).
- 1912 John Curo recovered a wood stake, and set 8x8x36 concrete post. County Survey Record Book A, pg 415-417.
- 2003 Bruce Grivna, RLS 17253, indicates monument set on filed Certificate of Survey.
- 2010 Jarrett Leas, RLS 42619, recovered monument set by Bruce Grivna, and replaced the monument with a ½" capped pipe.

The monument recovered, and established references for the position are shown on the face of this document.

Analysis of the recovered data, field evidence and survey measurements, indicate that the monument set by Jarrett Leas in 2010 is the correct perpetuation of this corner.