

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



A000596796

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/26/2013 2:30:46 PM

AS DOC #: A000596796  
PAGES: 2  
REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY SR \_\_\_\_\_ Dep

Northeast \_\_\_\_\_ Corner of Section 11  
Township 139 N , Range 26 W , 5th P.M.  
STATE OF MINNESOTA, COUNTY OF Cass


On \_\_\_\_\_, found a(n): \_\_\_\_\_  
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 3/12/2013, set a(n): Nothing. Proportionate Measurement  
DATE  
Lands Calculated Corner Position in Michaud Lake.


See "Statement of Evidence" for further details (on back)

(reserved for recording data)

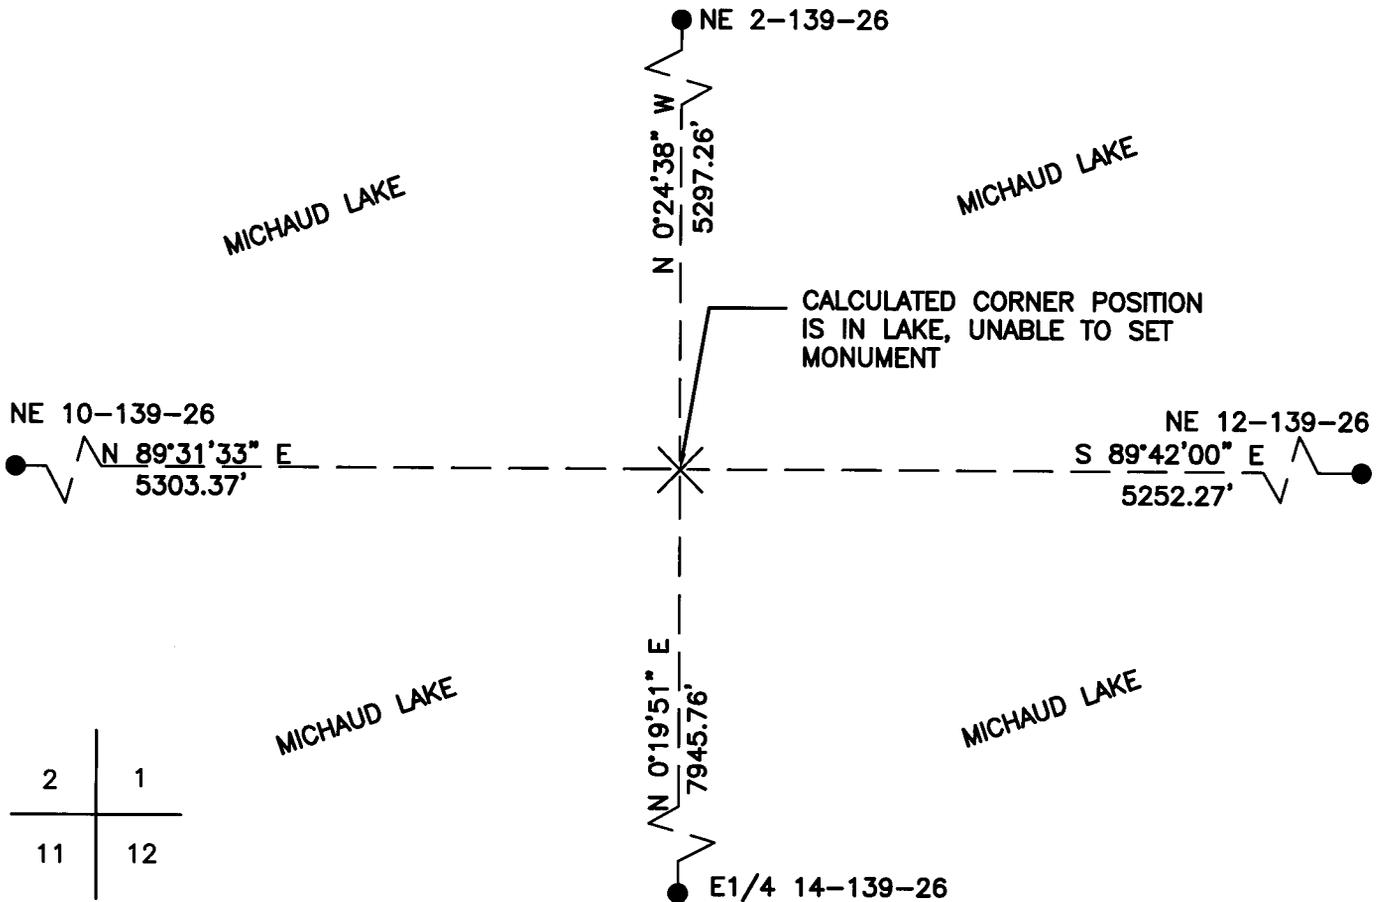

### "SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

### CASS COUNTY SOUTH COORDINATES

Northing: 362806.813  
Easting: 635892.799

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Jarrett M. Leas*  
signature

4-30-2013  
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000596796



Statement of Evidence

**North East corner of Section 11, Township 139 North, Range 26 West, 5th Principal Meridian.**

- 1863    The US General Land Office, in notes of the subdivision of Township 139 North, Range 26 West, set a post for the original corner and referenced it as follows:  
9" Scrub Pine    N 1/2° W                      242 links                      8" Scrub Pine    N 10° E                      106 links  
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 2013    Jarrett Leas, LS 42619, computes the corner lost by proportionate distances between the NE 2, NE 12, E ¼ 14, and the NE 10. The position for the corner is in Michaud Lake. GLO notes indicate the corner originally doubled as meander corner post. The size of the lake has since flooded the GLO position. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this calculated position as the correct perpetuation of the original corner location.