

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 4
Township 139 N , Range 25 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000597001

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

10/3/2013 2:30:42 PM

AS DOC #: A000597001

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep


On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On 4/23/2013, set a(n): 5/8"x 48" Rebar With Plastic Cap
DATE
Stamped "Leas 42619". Up 1.0'

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

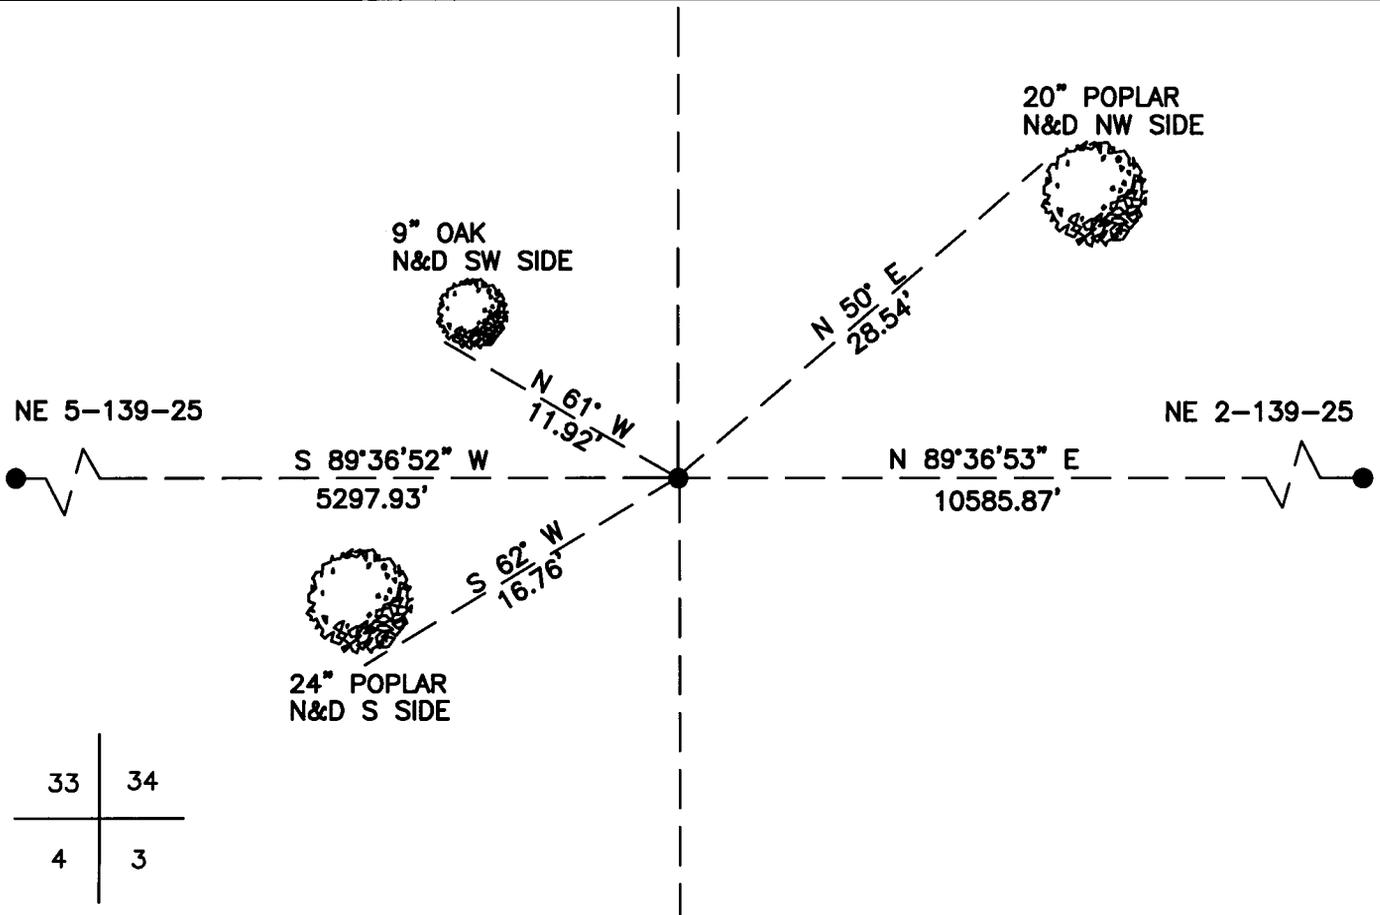

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 368106.295
Easting: 657052.695

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature
Jarrett M. Leas, Minnesota License No. 42619

9-30-13
date



Statement of Evidence

Northeast corner of Section 4, Township 139 North, Range 25 West, 5th Principal Meridian.

1863 The US Deputy Surveyors Johnson & Thornton US General Land Office, in notes of running the north line of Township 139 North, Range 25 West, set a post for the original corner and referenced it as follows:

7" B. Oak	N 40° E	53 links	7" B. Oak	S 32° W	35 links
6" B. Oak	S 48° E	57 links	6" Maple	N 52° W	38 links

Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

1937 The CCC Washburn Lake field book 1, page 10, on file at the DNR office in Brainerd, indicates a 4" oak stake with tag was set at approximately 82.59 chains from east, iron pipe could not be found due to, too much snow.

2013 KLJ field crews searched the area and find no evidence of the corner or accessories. This corner was set at a single proportion between the NE 2 and NE 5. A 5/8" x 48" rebar with plastic cap stamped "Leas MN 42619" was set to mark the corner position and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the reestablished at the lost position of the corner.