

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 16
Township 139 N, Range 25 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000597002

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

10/3/2013 2:30:43 PM

AS DOC #: A000597002

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000597002



On _____, found a(n): _____
DATE

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On 4/08/2013, set a(n): 5/8" X 48" Rebar with Plastic
DATE
Cap Stamped "Leas MN 42619" up 1.0' in Spruce/Tamarack Swamp.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

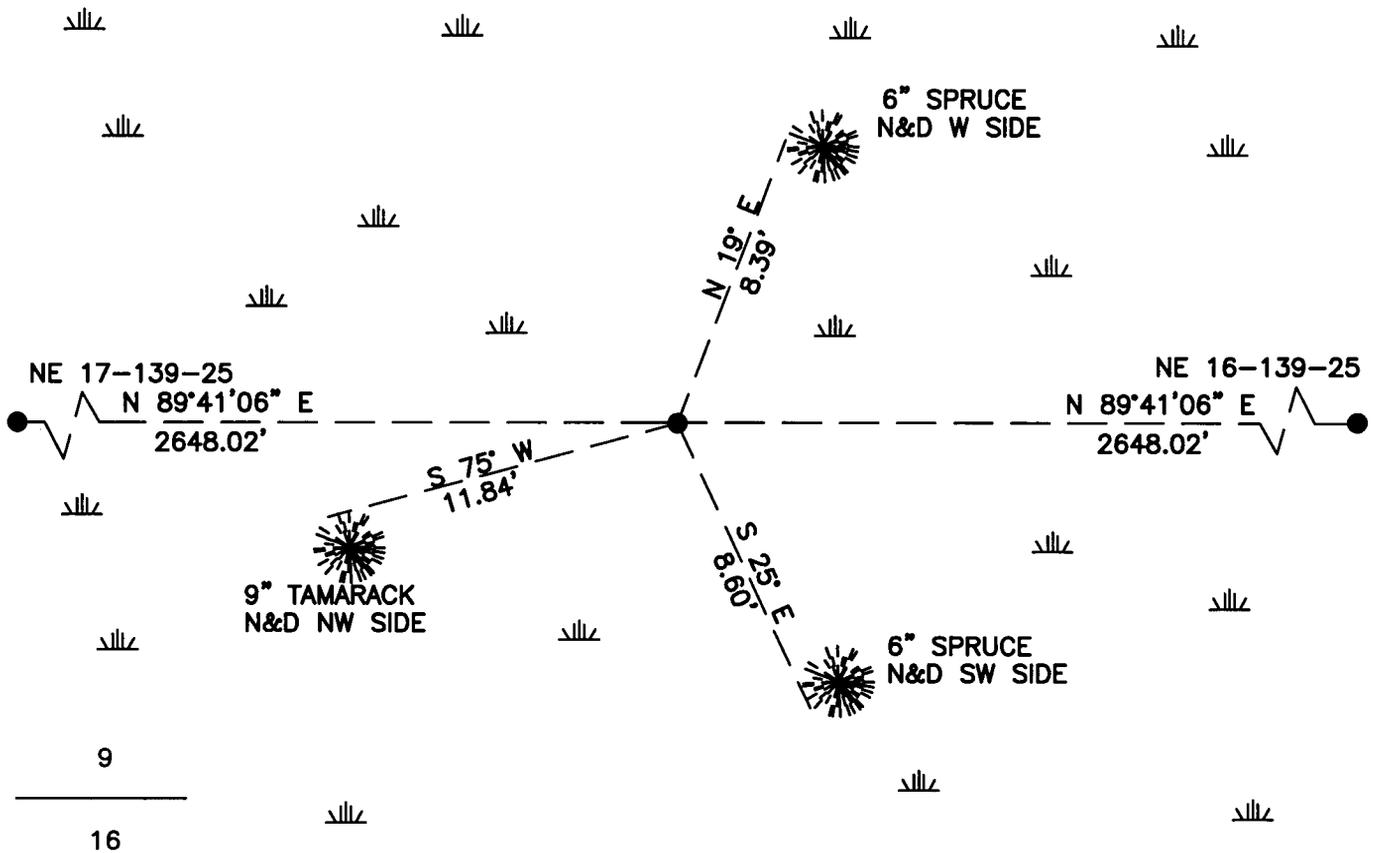

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 357537.494
Easting: 654442.673

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature
Jarrett M. Leas, Minnesota License No. 42619

9-30-13
date



Statement of Evidence

North Quarter corner of Section 16, Township 139 North, Range 25 West, 5th Principal Meridian.

- 1863 The US General Land Office, in notes of the subdivision of Township 139 North, Range 25 West, set a post for the original corner and referenced it as follows:
3" Tamarack S 28° W 7 links 6" Tamarack N 15° E 18 links
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- 1937 CCC Book 1, page 68, set approximate corner at 2640ft east. Book 8, found old post and remains of both BT's and set 1-½"x 54" iron pipe with 2-¼" steel cap:
5- ½" Black Spruce N 37° ½' E 23.7 feet 4" Black Spruce N 51° ½' W 15.7 feet
- 2013 KLJ field crews searched the area and find no evidence of the corner or accessories. This corner was set lost by proportioning between the NE 17 and the NE 16. A 5/8" x 48" rebar with plastic cap stamped "Leas MN 42619" was set to mark the corner position and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct lost position of the corner.