

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



A000597014

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

10/3/2013 2:30:55 PM

AS DOC #: A000597014

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep

East Quarter Corner of Section 11
Township 138 N , Range 31 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



On 11/20/2012, found a(n): 2" Capped Iron Pipe up 0.3'
in Good Condition.

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

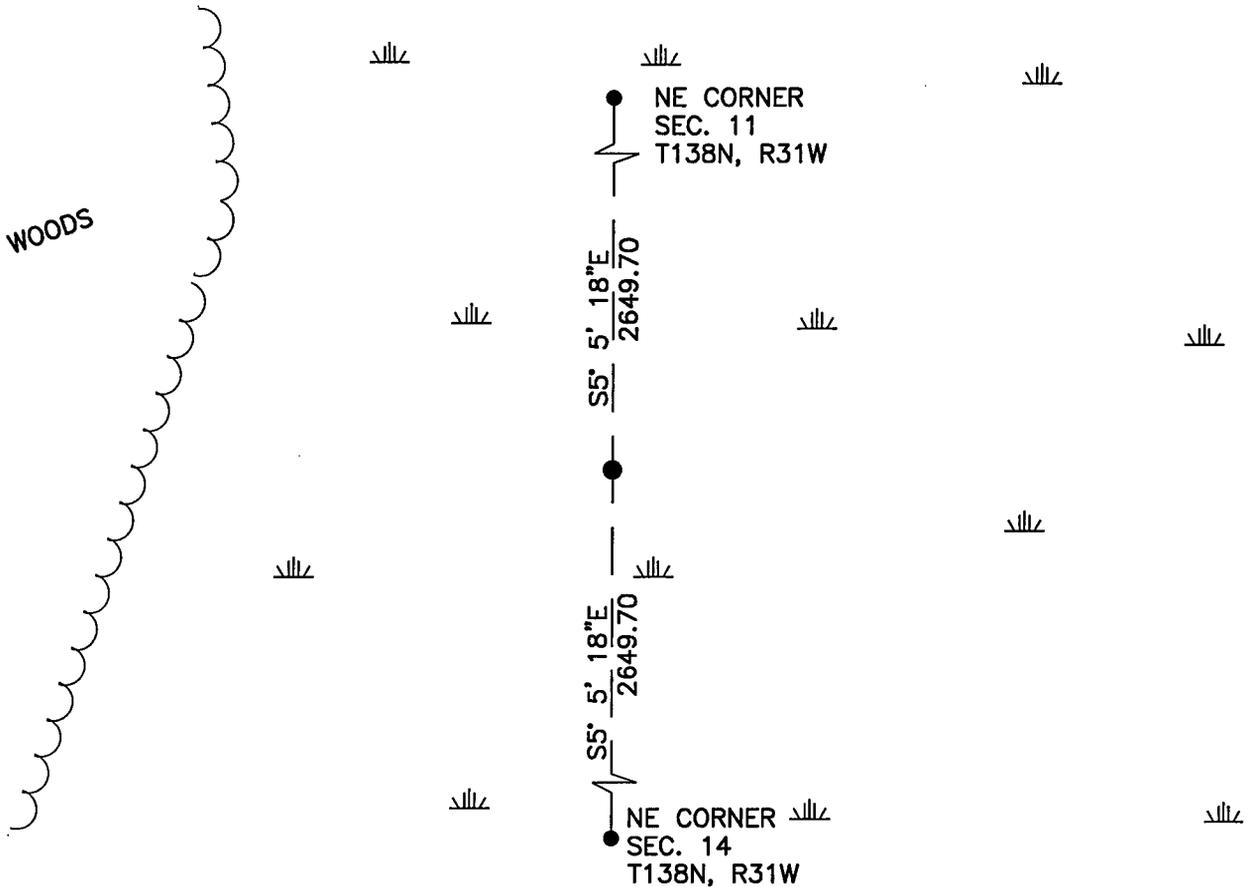

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 328900.665

Easting: 477781.910

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Jarrett M. Leas
signature

2-1-13
date

Jarrett M. Leas, Minnesota License No. 42619

Page 1 of 2 A000597014



Statement of Evidence

East Quarter corner of Section 11, Township 138 North, Range 31 West, 5th Principal Meridian.

- Nov. 1870 T.B.Walker, General Land Office (GLO) Deputy Surveyor set a post for the original corner in his subdivision of this township and referenced it as follows:
12" N. Pine S 73° W 315 links 10" Bl. Oak N 74° W 170 links
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- Oct. 1919 John Curo, LS 1428, Curo Field Book 26, Page 3, in a copied sketch of U.S. notes shows an I.M. in place.
- Jan. 1922 C.J. Bark, County Ditch Survey, Book 97, Page, 26, indicates finding a wood stake as the Quarter Corner.
- Oct. 2012 A KLJ survey crew found a 2" capped Iron Pipe, and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.