

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 18, Township 136N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
Date _____

_____ left monument as found _____ lowered monument _____ removed monument (explain)

On 04/30/2012 placed a 3/8" RE-ROD WITH RLS CAP NO. 17774
Date _____

SKETCH OF REFERENCE TIES

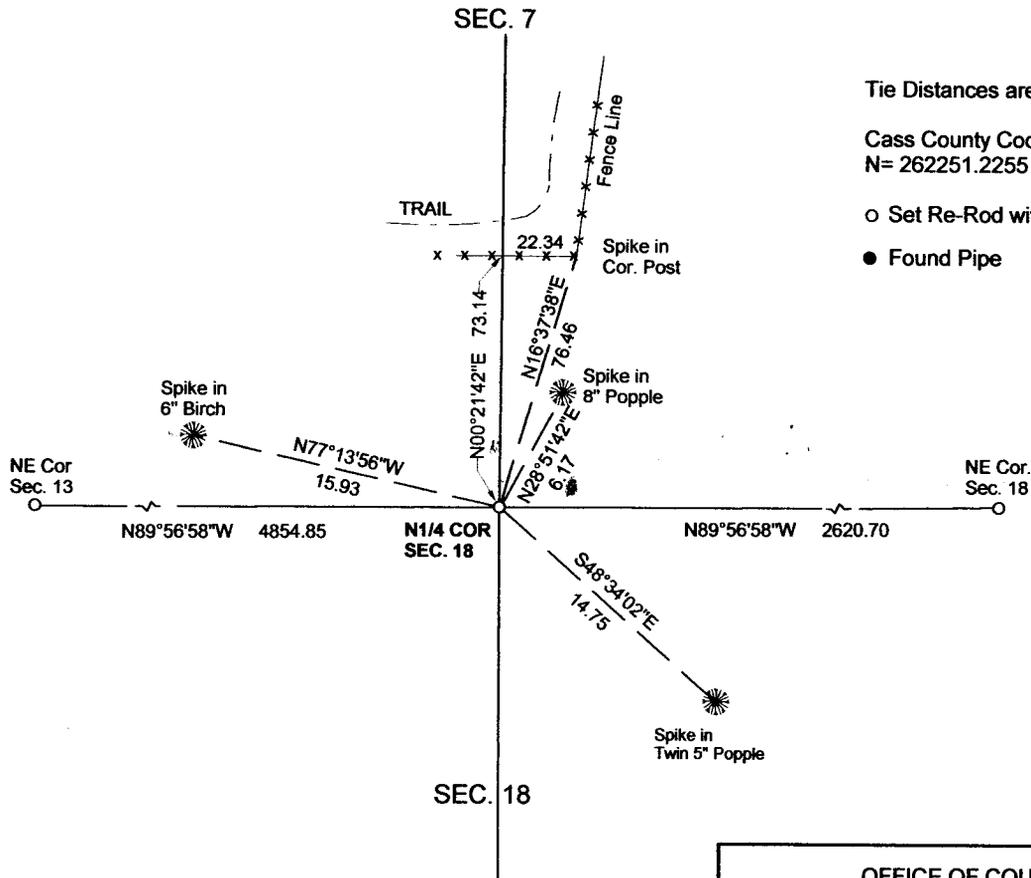


Tie Distances are measured to the spike.

Cass County Coordinate System (South Zone)
N= 262251.2255 E= 457513.4454

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 1 Oct 2012
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000598677

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/5/2013 9:30:44 AM

AS DOC #: A000598677

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep



INDEX NO. J.0 - 3.0
STATEMENT OF EVIDENCE:

NORTH QUARTER CORNER OF SECTION 18, TOWNSHIP 136 N., RANGE 31 W., 5TH P.M.

1870 DEPUTY SURVEYOR RICHARD CRONK, IN THE ORIGINAL
GOVERNMENT SURVEY, SET A POST AND MARKED BEARING
TREES.

2012 APRIL DOUG STILLE AND MARVIN KOHOUT, LS NO. 17774, OF KOHOUT
LAND SURVEYING, SEARCHED FOR EVIDENCE OF THIS
CORNER. A MONUMENT WAS SET AT A PRORATED
DISTANCE AND ON LINE BETWEEN THE NORTHEAST
CORNER OF SECTION 18 AND THE NORTHEAST CORNER
OF SECTION 13, TWP. 136 N., RGE, 32 W. MEASURMENTS
TO HISTORIC FEATURES (BEAVER PONDS) EAST AND
WEST WERE IN HARMONY WITH THE ORIGINAL
RUNNING NOTES.

[Faint, illegible handwritten or stamped text]