

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 32
Township 139 N, Range 27 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000598875

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/12/2013 9:19:42 AM

AS DOC #: A000598875
PAGES: 2
REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER
BY SR Dep


On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 1/22/2013, set a(n): 5/8"x24" Rebar With Plastic Cap
DATE
Stamped "Leas MN 42619" up 0.5'.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

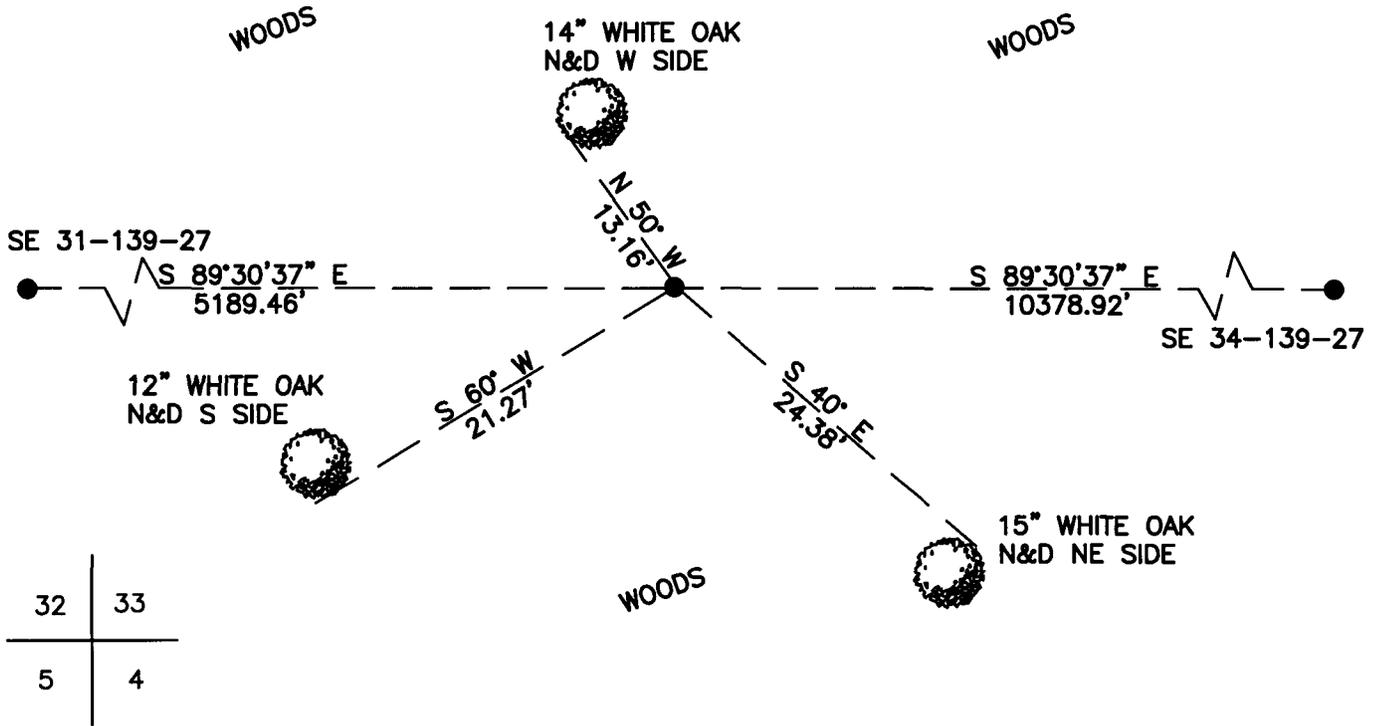

32	33
5	4

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 336488.796

Easting: 588649.137

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Jarrett M. Leas
signature
Jarrett M. Leas, Minnesota License No. 42619

9-30-13
date

Page 1 of 2 A000598875



Statement of Evidence

Southeast corner of Section 32, Township 139 North, Range 27 West, 5th Principal Meridian.

1863 The US General Land Office, in notes of running the south line of Township 139 North, Range 27 West, set a post for the original corner and referenced it as follows:

8" Aspen	N 68° E	23 links	10" Aspen	S 23° E	8 links
6" Aspen	S 75° W	21 links	8" Aspen	N 7° W	14 links

Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

1937 CCC Washburn Lake field book 2, page 5, indicates CCC personnel set a 3" square Oak stake 80 ch from west.

1939 CCC Washburn Lake field book 10, page 18, indicates CCC personnel at 5280' from the east, a 3" Aspen stake temp corner was set.

2013 KLJ field crews searched the area and found nothing. This corner was set lost by single proportion between the Southeast corner of Section 31 and the Southeast corner of Section 34. A 5/8" x 24" rebar with plastic cap stamped "Leas MN 42619" was set to mark the corner position and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.