

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 31  
Township 145 N, Range 26 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000599552

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/9/2014 1:30:02 PM

AS DOC #: A000599552

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY SR Dep

On \_\_\_\_\_, found a(n): \_\_\_\_\_  
DATE


- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 3/1/2012, set a(n): 3.5" Aluminum Cap on 3/4"x 4'  
DATE  
Rebar. Flush with Ground

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: Swampy / Slough

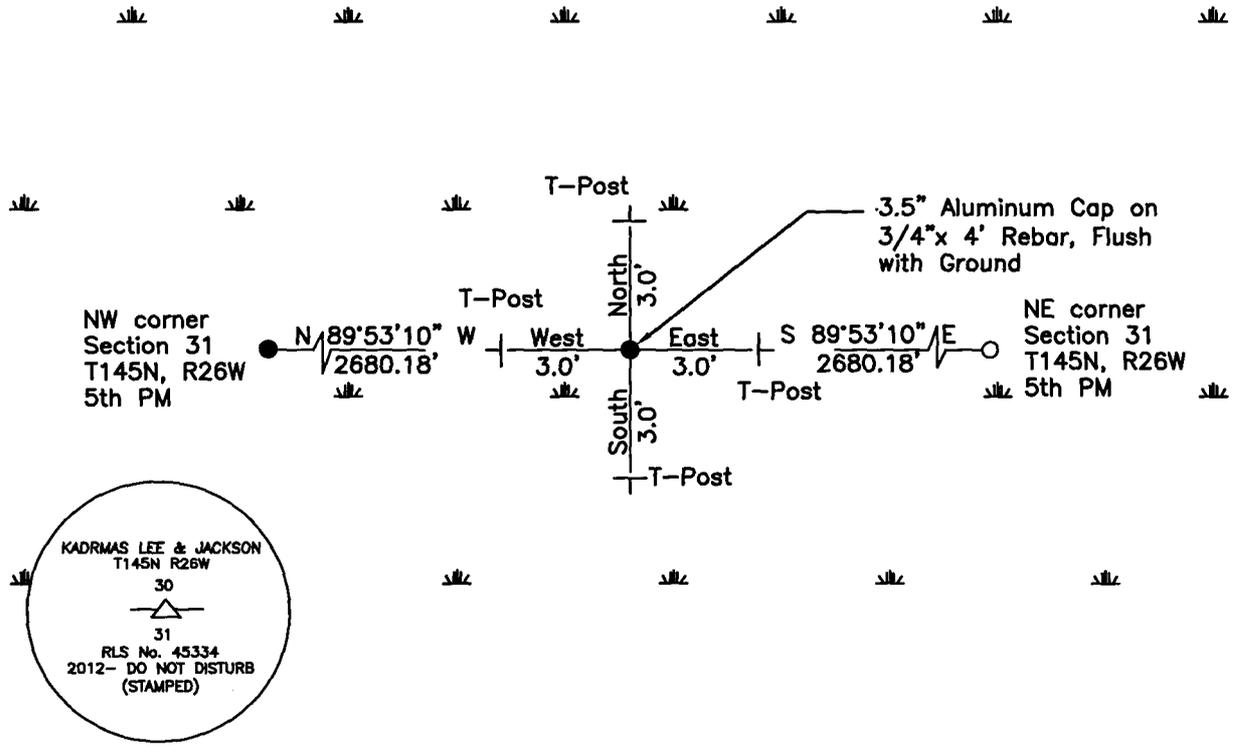

"SKETCH OF REFERENCE TIES"  
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15  
 Northing: 17202850.284  
 Easting: 1387326.928

NAD 83/1996 Adjustment.  
 Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre signature      6/6/13 date

Ross Wamre, Minnesota License No. 45334





**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 30 and 31 of Township 145 North,  
Range 26 West of the 5<sup>th</sup> Principal Meridian

**1876;** Benjamin C. Baldwin, for the Government Land Office established this corner and set a post and witnessed by:

Tamarack 5" South 81° West, 50 Links  
Tamarack 6" North 29° West, 52 Links

**1960;** USFS 874 form, on file at the USFS office in Cass Lake, MN, shows that Stanley M. Morrison, USFS Forestry Aid, set two metal tags on trees around this corner location marked with blue paint. Corner is on South side of beaver dam flowage and witnessed by:

Set Tag North Face of Tamarack 9" North, 0.6 chains  
Set Tag Dead Tamarack 8" Southwest, ± 0.5 chains

**2010;** A Kadrmias, Lee & Jackson survey crew found no evidence in a search of this corner location.

**2012;** Ross Wamre, RLS #45334, set a 3.5" stamped Aluminum Cap on ¾" x 4' rebar, flush at a lost single proportionate measurement location. As measured from the Northeast & Northwest Corners of Section 31-145-26. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office