

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 20
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000599924

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/27/2014 10:38:35 AM

AS DOC #: A000599924

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On _____, found a(n): _____

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 7/11/2012, set a(n): 2.5"x4' Iron Pipe with a 3.5" Brass Cap 1' Above Ground with a Fence Post on the North Side

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

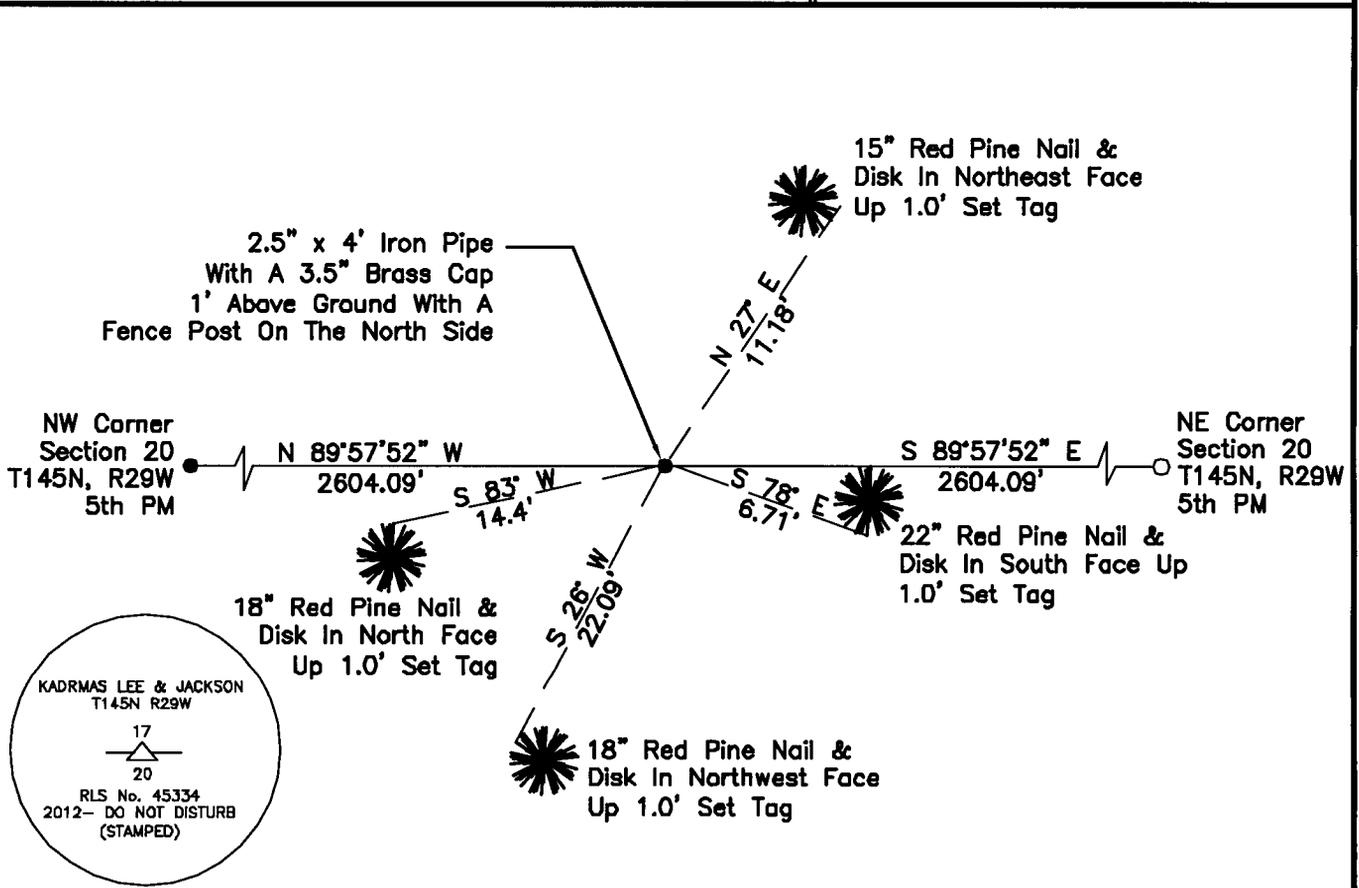

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17214418.990

Easting: 1297314.940

NAD 83/1996 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/13/13
date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 17 and 20 of Township 145 North,
Range 29 West of the 5th Principal Meridian

1874; This corner was originally established by P. H. Conger, his field notes indicate that this corner was marked by a post and witnessed by:

Black Pine 6" North 22^o East, 11 Links
Aspen 5" South 18^o West, 27 Links

1973; USFS notes of Township 145 North, Range 29 West, Book 1, Page 56, on file at the USFS office in Cass Lake, MN, show Curt Krause and Mark Nornberg, USFS, chained due East from the Corner of Sections 17, 18, 19 and 20 1300' along old fence line placed FSLP on 18" Jack Pine on West Side Lybe Road. The following day, Mark Nornberg, USFS, continues chaining from tagged Jack Pine east to 2640' East of the corner of Sections 17,18,19 and 20, he found Norway Pine with FSLP on west side facing fire trail #20, Norway Pine has readable scribe mark on east side

1997; USFS notes of Township 145 North, Range 29 West, Book 1, Page 56, on file at the USFS office in Cass Lake, MN, show Curt Krause, USFS, walked north from Highway #2 approximately 1200 feet. He found a 27" Norway Pine with scribe inside the East Face and an old tag on the East side of tree dated 6/8/39 by C. Smith with no distance to corner. He also found a tag from 1973 on the West side still in place. The Pine is on East side of Woods trail North and South 30' south of drainage SW and SE. Removed old tag on East side of Norway Pine five small nails are still in place Norway pine doesn't fit original ties, some aspen in the area, Norway pine has blue & red point around tree. Nothing in CCC records to help restore the position and no 874 forms could be found.

2010; A Kadrmas, Lee & Jackson survey crew found no evidence at this corner location or the Norway Pine found in 1997.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information determines the corner to be set at a lost single proportionate measurement due to the lack of recovered, documented or recorded evidence for this corner and its possible accessories set or recovered previously. Corner was monumented with a 2.5" x 4' iron pipe with a 3-1/2" brass cap 1.0' above ground. Witnesses found and established as shown on face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office