

Page 1 of 2 A000600039

Index No. P-17

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 22  
Township 145 N, Range 29 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000600039

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/30/2014 11:01:16 AM

AS DOC #: A000600039

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep



On \_\_\_\_\_, found a(n): \_\_\_\_\_  
DATE

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On 7/26/2012, set a(n): 5/8"x 4' Rebar With A 3.5"  
DATE  
Aluminum Cap 0.8' Above Ground With A Fence Post On North Side

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

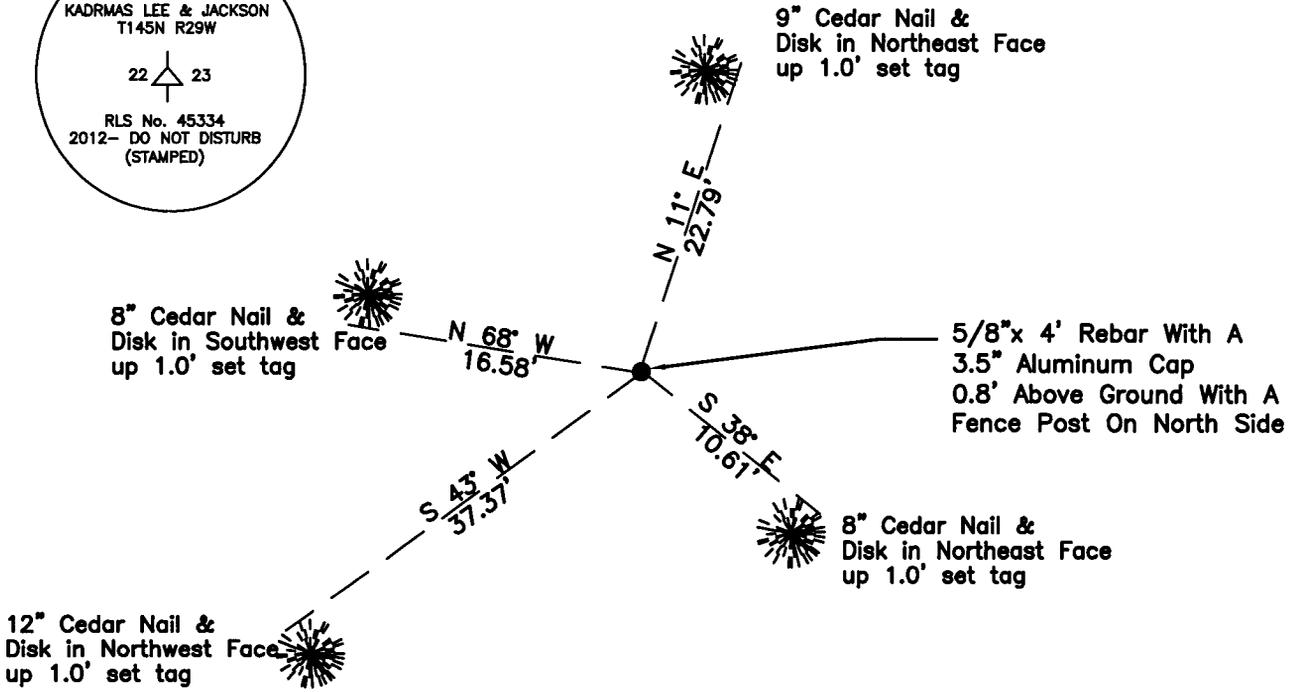

NOTE: All Trees Double Blazed

"SKETCH OF REFERENCE TIES"  
(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17211696.046

Easting: 1310521.431

NAD 83/1996 Adjustment.  
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature  
Ross Wamre, Minnesota License No. 45334

6/24/13  
date



**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 22 and 23 of Township 145 North, Range 29 West of the 5<sup>th</sup> Principal Meridian.

**1874;** This corner was originally established by P.H. Conger for the Government Land Office and his field notes indicate that a post was set, witnessed by:

Tamarack 14" South 87° West, 7 links  
Cedar 3" South 56° East, 4 links

**1898;** Great Northern Railway Right-of-Way and Track map 1804CS4 shows a distance and station tie to this corner location. Information is on file with the Minnesota Department of Transportation.

**1903;** U.S. Army Corps of Engineers recovered this corner according to Township 145 North, Range 29 West flowage map for the Leech Lake and Lake Winnibigoshish Reservoirs. Map is on file at the USFS office in Cass Lake, MN.

**2010;** A Kadrmas, Lee & Jackson survey crew found no evidence of this corner location.

**2012;** Ross Wamre, RLS #45334, set a 3 ½" stamped Aluminum Cap on ¾" x 4' rebar, 0.8' above ground at the perpetuation of the corner according to record distance north from the located Great Northern Railroad plat which matches GLO distance, bearing established from the calculated Northeast corner of Section 22 established by GLO chainage over the ice and the obliterated MC# 4 to the South. Witnesses found and established as shown on face of this certificate.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office