

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 27
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600046

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/30/2014 11:01:23 AM

AS DOC #: A000600046

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 05/13/2010, found a(n): 2" Iron Pipe With 3" Brass Cap
Stamped RLS# 6807, 1.0' Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

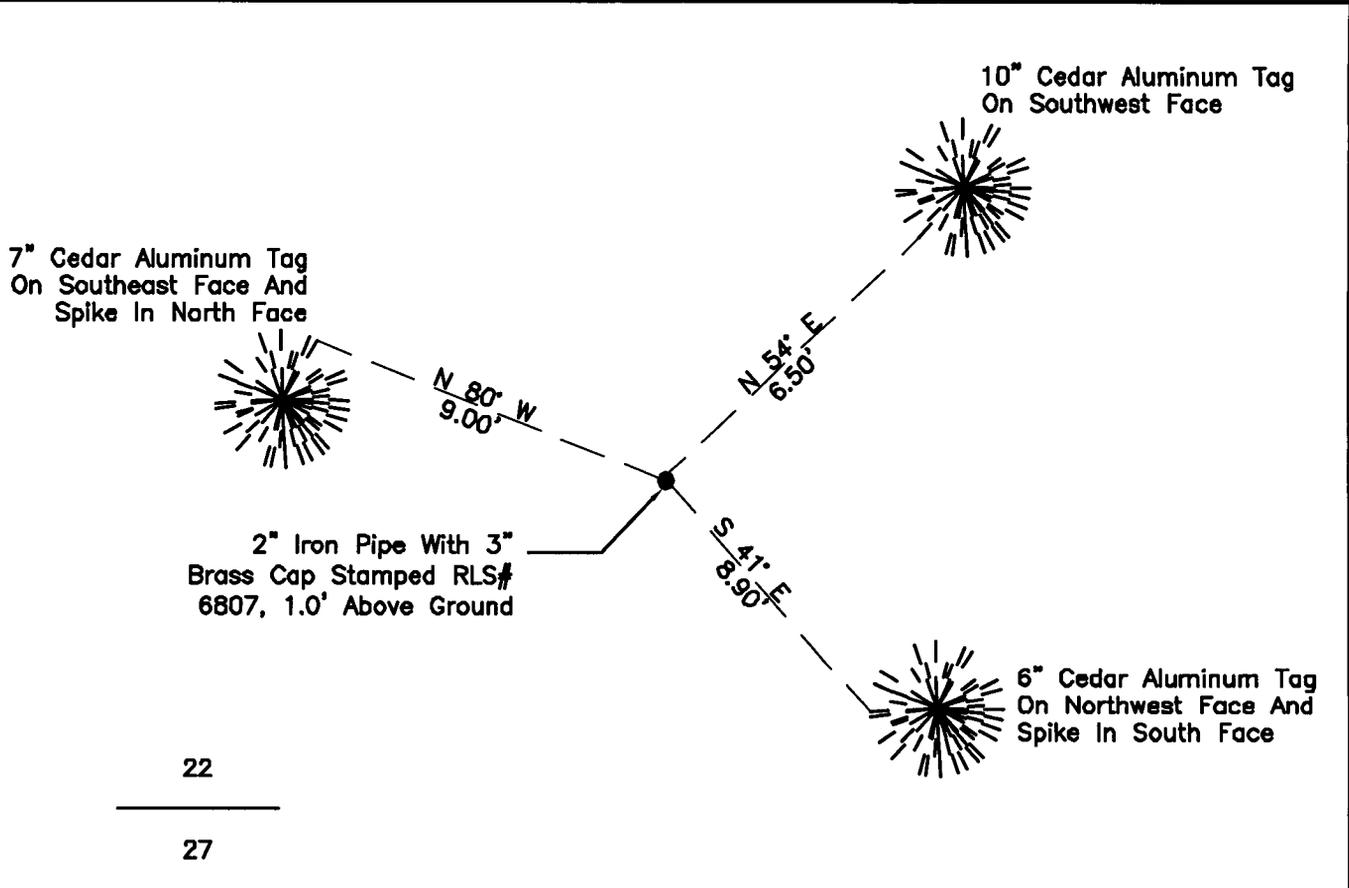

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17209056.710
Easting: 1307746.117

NAD 83/1996 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/18/13
date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 22 and 27 of Township 145 North, Ranges 29 West of the 5th Principal Meridian.

1874; This corner was originally established by P.H. Conger his field notes indicate this corner position, witnessed by:

Spruce 6" South 29° East, 5 links
Spruce 6" North 42° West, 16 links

1903; U.S. Army Corps of Engineers recovered this corner according to Township 145 N Range 29 W flowage map for the Leech Lake and Lake Winnibigoshish Reservoirs. Map is on file at the USFS office in Cass Lake, MN.

1963; USFS notes of Township 145 North, Range 29 West, Book 1, Page 13, on file at the USFS office in Cass Lake, MN, show W.H. Okerman left a 2" diameter, 60" long galvanized steel monument filled with concrete and capped with a 3" diameter bronze tablet stamped RLS# 6807 at approximate location.

2010 A Kadrmas, Lee & Jackson survey crew found a 2" Iron Pipe with a 3" diameter Brass Cap stamped RLS# 6807 1' above ground, witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, RLS# 45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office