

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner# 13 of Section 23
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600049

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/30/2014 11:01:26 AM

AS DOC #: A000600049

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 04/29/2010, found a(n): 2" Iron Pipe With 3" Brass Cap
Stamped 1958 RLS # 3628, 1.0' Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

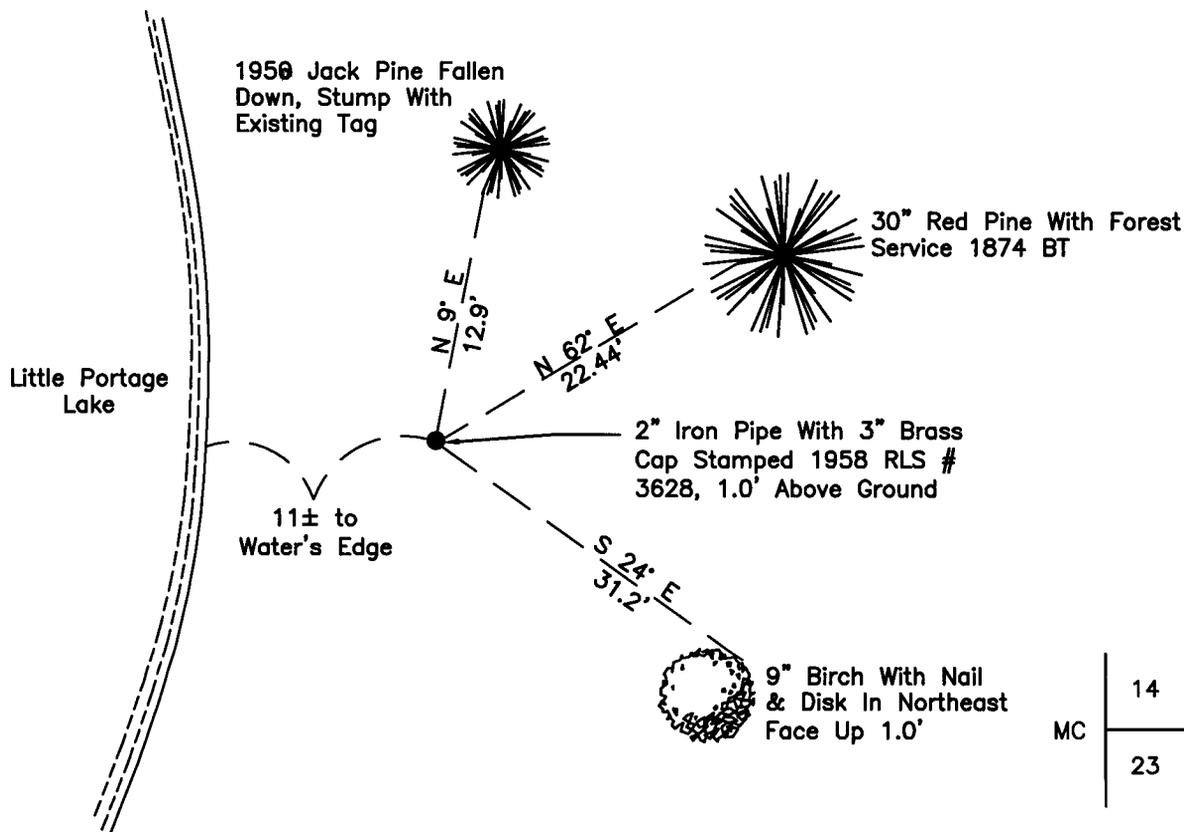

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17214531.350

Easting: 1311370.695

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/24/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Meander Corner # 13 common to Sections 14 and 23 of Township 145 North, Range 29 West of the 5th Principal Meridian

1874; This meander corner was originally established by P.H. Conger for the GLO. His field notes indicate a wood post set at this corner position, witnessed by:

Yellow Pine 10" North 62° East, 34 links
Black Pine 6" South 39° East, 34 links

1958; USFS notes of Township 145 North, Range 29 West, Book 1, Page 8, on file at the USFS office in Cass Lake, MN show Pete Meyer, RLS# 3628, found no evidence of set wood post but found one original BT. Set a 2" diameter, 5' long galvanized wrought iron pipe filled with concrete and capped with a 3" diameter bronze tablet stamped RLS# 3628 1958. An affidavit to Location of a Government Corner is on file with Cass County, this corner witnessed by:

Red Pine 27" North 62° East, 22.44' - scribe "B" visible (1874 Tie)
Red Oak 7" South 28° East, 49.2'
Jack Pine 3" South 62° East, 31.6'
Red Oak 8" North 53° East, 62.3'
Jack Pine 13" North 9° East, 12.9'

1980; USFS notes of Township 145 North, Range 29 West, Book 1, Page 8, on file at the USFS office in Cass Lake, MN show Curt Krause, USFS found the monument witnessed by:

Red Pine 30" North 62° East, 22.44' – faint scribe visible, set FSLP & 54-4 sign (1874 Tie)
Red Oak Stump, South 28° East, 49.2' - scribe visible (1958 tie)
Jack Pine windfall, South 62° East, 31.6' - scribe visible (1958 Tie)
Red Oak windfall, North 53° East, 62.3' - scribe visible (1958 Tie)
Jack Pine 15" North 9° East, 12.9' - scribe visible (1958 tie)

1986; USFS notes of Township 145 North, Range 29 West, Book 1, Page 8, on file at the USFS office in Cass Lake, MN show D. Marshall, USFS, found corner monument in good shape witnessed by:

Red Pine 30" North 62° East, 22.44' – faint scribe visible, set FSLP & 54-4 sign (1874 Tie)
Red Oak Stump, South 28° East, 49.2' - scribe visible (1958 tie)
Jack Pine windfall, South 62° East, 31.6' - scribe visible (1958 Tie)
Red Oak windfall, North 53° East, 62.3' - scribe visible (1958 Tie)
Jack Pine 15" North 9° East, 12.9' - scribe visible (1958 tie)

2010; A Kadrmas, Lee, & Jackson survey crew found a 2" Iron Pipe with a 3" brass cap stamped RLS #3628 1' above ground, witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.



Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office