

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 23
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600050

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/30/2014 11:01:27 AM

AS DOC #: A000600050

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 04/01/2010, found a(n): 4" Cast Iron Monument
DATE
0.4' Above Ground

left monument as found lowered monument
 removed monument (explain) raised monument


On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

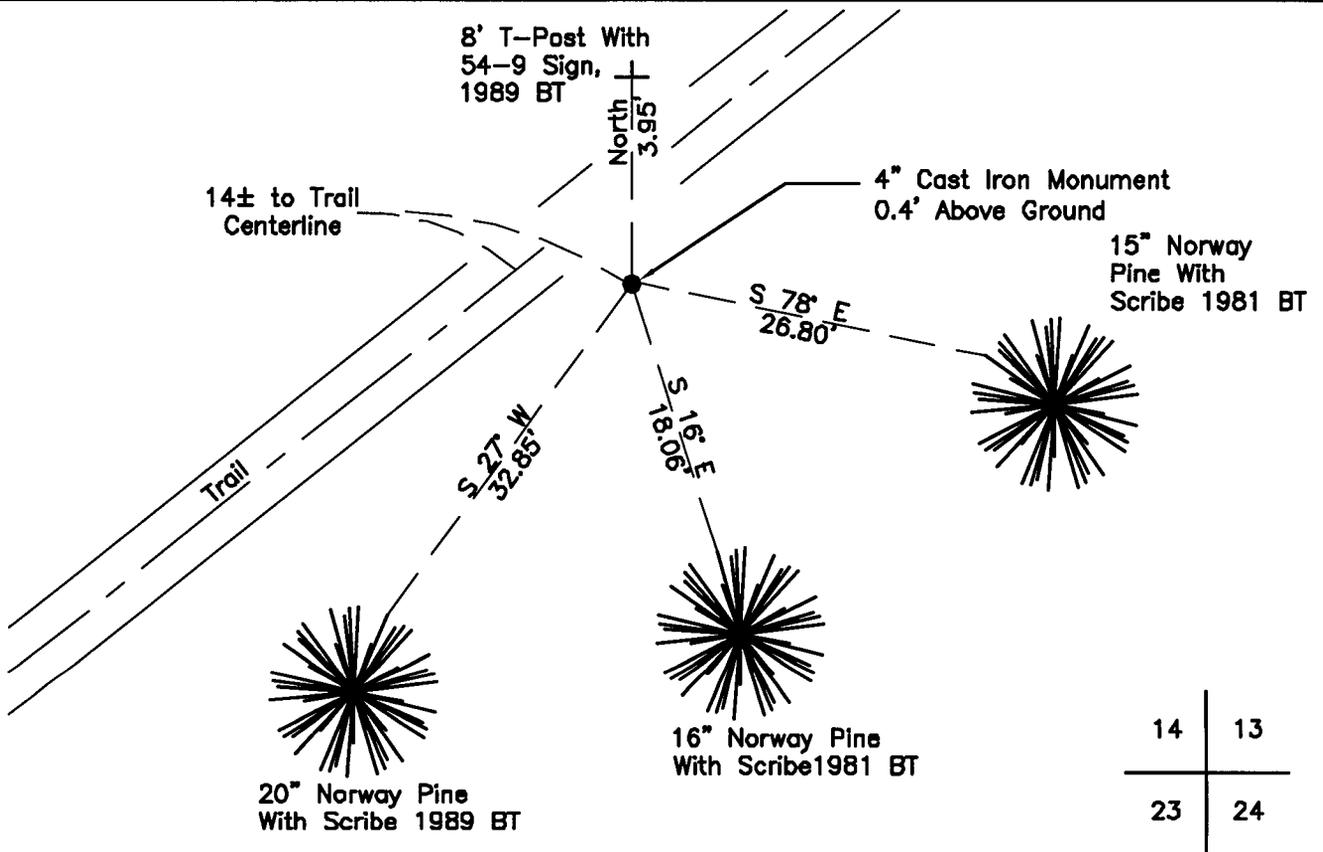

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument
unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17214353.480

Easting: 1315892.666

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/24/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000600050



STATEMENT OF EVIDENCE: Corner common to Sections 13, 14, 23 and 24 of Township 145 North,
Range 29 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the Government Land Office and his field notes indicate that a post was set, witnessed by:

Y. Pine 24" North 80° West, 132.0'
Y. Pine 24" South 32° West, 52.80'
B. Pine 8" North 26° East, 12.54'
B. Pine 6" North 57° East, 29.70'

1914; Forest service notes of 1914, no name given. N. Pine sets alongside of old road. Corner is 20 paces North of road. Information on file with USFS office in Cass Lake.

1967; James Ekstrom, USFS, Book 1 of Township 145 North, Range 29 West, page 20, found post along old woods road. New bulldozing in area has possibly obliterated the evidence described above. Searched 3 man hours no evidence found.

1981; David Claypool RLS# 13298 subdivision of Section 24, corner position was established from original evidence, large pine stump, pushed north of its true position, this tree was determined to be the 24" N. Pine South 32° West, 52.80' no others could be located. Claypool set 20" Cast Iron Monument, 2" above ground witnessed. Information in Book 1 of Township 145 North, Range 29 West, page 20.

Red Oak 8" North 44° East, 12.25' double blazed
N. Pine 10" South 78° East, 26.80' double blazed
N. Pine 12" South 16° East, 18.06' double blazed

1989; C. Krause and R. Main, USFS, Book 1 of Township 145 North, Range 29 West, page 20, found Cast Iron Monument, in place, 6" above ground 6' east of woods trail NE-SW. Red Oak Bt is dead at bearing and distance. Original pine stump has been pushed due west of its location, no stump hole visible as trail NE would go over stump hole.

N. Pine 12" South 78° East 26.80' scribed S24 BT (1981)
N. Pine 14" South 16° East 18.06' scribed S24 BT (1981)

New BT

N. Pine 16" South 27° West 32.85' MKD S23 BT
Steel Sign Post 8', North, 3.95' 54-9

2010; A Kadrmas, Lee & Jackson survey crew found 4" Cast Iron Monument at corner location with three previous bearing trees, all scribed. Witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:



Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office