

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 24
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600051

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/30/2014 11:01:28 AM

AS DOC #: A000600051

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 12/20/2012, found a(n): 4" Cast Iron Monument
6" Above Ground

left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

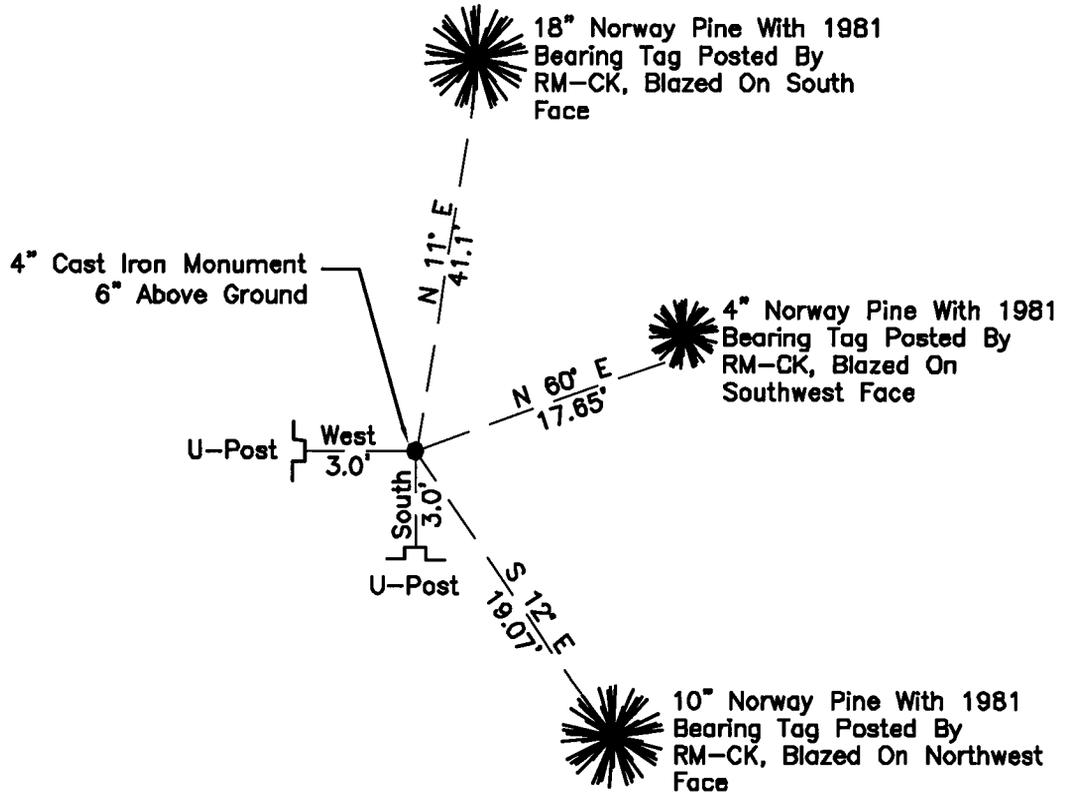

13

24



"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17214204.910

Easting: 1318539.978

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/12/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000600051



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 13 and 24 of Township 145 North, Range 29 West of the 5th Principal Meridian.

1874; This corner was originally established by P.H. Conger for the Government Land Office and his field notes indicate that a post was set, witnessed by:

Black Pine 8" South 15^o West, 41 links
Black Pine 12" North 13^o West, 217 links

1914; Both the CCC notes and the USFS notes of Township 145 North, Range 29 West, Book 1, Page 21, on file at the USFS office in Cass Lake, MN show J.A. Donery, Forest Ranger, found a Jack Pine stake flat on ground witnessed by:

Jack Pine 8" in Section 13

1967; USFS notes of Township 145 North, Range 29 West, Book 1, Page 21, on file at the USFS office in Cass Lake, MN show James Ebstrom, USFS, found the 1914 Jack Pine (now a 6' high snag) scribed "¼ S BT"

1969; USFS notes of Township 145 North, Range 29 West, Book 1, Page 21, on file at the USFS office in Cass Lake, MN show Morrison & Morgan, USFS, found an old tag on the south side of 12" Jack Pine stub.

1981; Both the Certificate of Location of Government Corner Document No. 260586 on file at the Cass County Recorder Office and the USFS notes of Township 145 North, Range 29 West, Book 1, Page 21, on file at the USFS office in Cass Lake, MN, show David Claypool, RLS #13298, while performing a Survey of subdivision of Section 24, found a Jack Pine Stub 12" dia. - 6' high blazed and scribed "¼ S BT" The tree doesn't agree with the original survey ties. For computation and subdivision purposes the corner position was established by holding the original distance to the bearing of North 52^o West to the bearing tree. This position was found to be compatible with other measurements within the section. He set a 20" Cast Iron monument, 5" above ground at the base of a 12" poplar stub witnessed by:

Norway Pine 8½" North 11^o East, 41.10' double blazed, set spike 2' up from base of tree
Norway Pine 4" North 60^o East, 17.65' double blazed, set spike in base of tree
Norway Pine 5" South 12^o East 19.07' double blazed, set spike in base of tree

1997; USFS notes of Township 145 North, Range 29 West, Book 1, Page 21, on file at the USFS office in Cass Lake, MN show R. Main and C. Krause, USFS, found a cast iron monument in place 4" above ground in thick brush witnessed by:

Norway Pine 15" North 11^o East, 41.10' (1981 Tie)
Norway Pine 5" North 60^o East, 17.65' (1981 Tie)
Norway Pine 7" South 12^o East 19.07' (1981 Tie)
Norway Pine 13" North 18^o West, 3.0' blazed on 4 sides
Placed a FSLP on a Aspen 6" 400' East of corner on West side of a woods trail



2010; A Kadrmas, Lee & Jackson survey crew found a 4" Cast Iron monument 6" above ground, witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office