

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 26  
Township 145 N, Range 29 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000600052

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/30/2014 11:01:29 AM

AS DOC #: A000600052

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


On 12/19/2012, found a(n): 4" Cast Iron Monument 6"  
Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

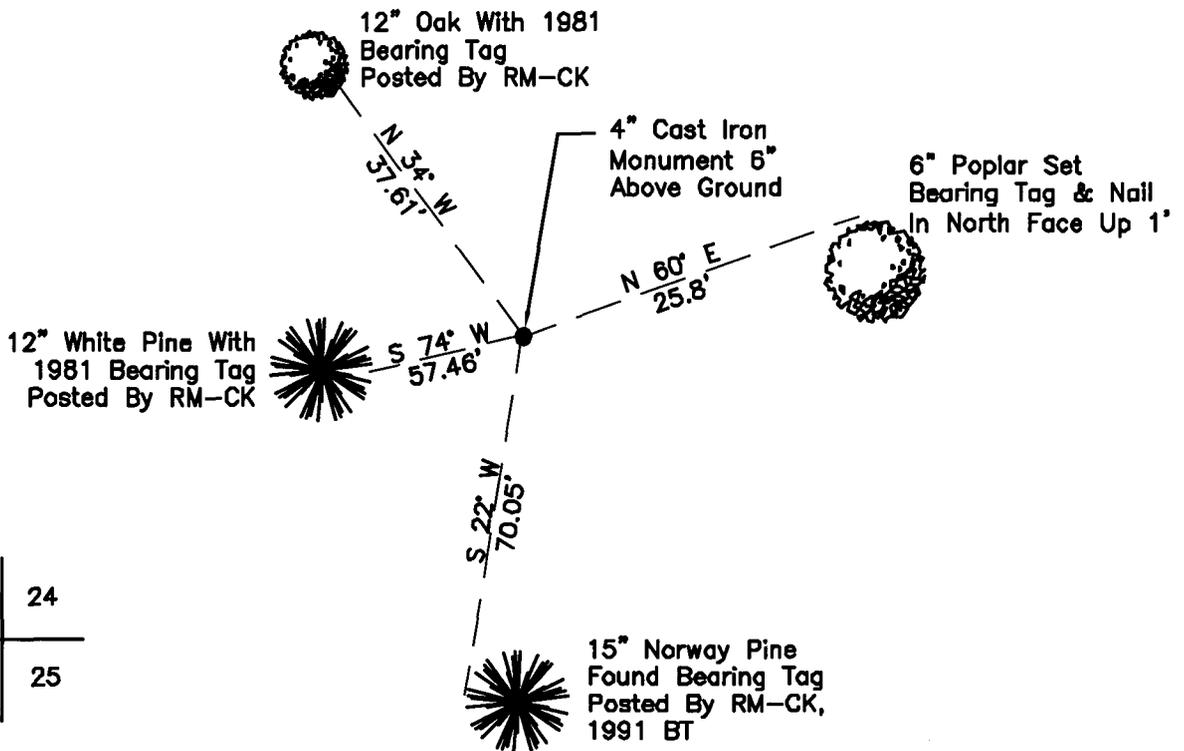

23	24
26	25



### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17209057.600

Easting: 1315741.255

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/13/13  
date

Ross Wamre, Minnesota License No. 45334



**STATEMENT OF EVIDENCE:** Section Corner common to Sections 23, 24, 25 and 26 of Township 145 North, Range 29 West of the 5<sup>th</sup> Principal Meridian.

**1874;** This corner was originally established by P.H. Conger for the Government Land Office and his field notes indicate that a wood post was set, witnessed by:

- Black Pine 8" South 45° West, 10 links
- Black Pine 8" North 56° East, 15 links
- Black Pine 10" North 61° East, 29 links
- Black Pine 10" South 35° West, 38 links

**1898;** Great Northern Railway right-of-way plat 1804CS5 shows a distance tie to this corner location. Information is on file with the Minnesota Department of Transportation.

**1903;** U.S. Army Corps of Engineers recovered this corner according to Township 145 N Range 29 W flowage map for the Leech Lake and Lake Winnibigoshish Reservoirs. Map is on file at the USFS office in Cass Lake, MN.

**1914;** Both the CCC notes and the USFS notes of Township 145 North, Range 29 West, Book 1, Page 17, on file at the USFS office in Cass Lake, MN, show J.A. Donery, Forest Ranger, found a Jack Pine stake and a fallen Jack Pine BT. Corner falls 36 rods south of Great Northern RR tracks.

**1974;** Field notes of the BLM Dependent Resurvey of a portion of the East Boundary and Subdivisional Lines and the survey of the Subdivisions in Section 25, Township 145 North, Range 29 West, by Charles E. Akin Jr., Cadastral Surveyor, show he found no remaining evidence of the original corner and it was not monumented.

**1981;** Both the Certificate of Location of Government Corner Document No. 260588 on file at the Cass County Recorder Office and the USFS notes of Township 145 North, Range 29 West, Book 1, Page 17, on file at the USFS office in Cass Lake, MN, show David Claypool, RLS #13298, while performing a Survey of subdivision of Section 24, recovered no evidence of the original survey. Corner was set by lost method, double proportionate N & S – E & W between known corners. He set a 20" Cast Iron Monument 6" above the ground. Corner is 138' West of a N-S power line witnessed by:

- White Oak 8" North 34° West, 37.61' Double Blazed, spike in base of tree
- Jack Pine 17" North 70° West, 5.13' Double Blazed, spike in base of tree
- Norway Pine 8" South 74° West, 57.46' Double Blazed spike in base of tree

**1997;** USFS notes of Township 145 North, Range 29 West, Book 1, Page 17, on file at the USFS office in Cass Lake, MN show R. Main & C. Krause, USFS, found a cast iron monument with top of monument broken off, base was found in place. They placed the top of the monument back in place witnessed by:

- White Oak 12" North 34° West, 37.61' (1981 Tie)
- Dead Jack Pine Snag 17" North 70° West, 5.13' (1981 Tie)
- Norway Pine 15" South 74° West, 57.46' (1981 Tie)
- Norway Pine 9" South 22° West, 70.05' marked: S26 BT



Found shot up FSLP tag on a Norway Pine 19" East, 375' on East Side of FR 2175

**2010;** A Kadrmas, Lee & Jackson survey crew found a 4" Cast Iron monument in place 6" above ground, witnesses found and established as shown on face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of this corner location.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office