

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 18, Township 139N, Range 25W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
Date _____

left monument as found lowered monument removed monument (explain)

On 10/19/2012 placed a 3/8" RE-ROD WITH RLS CAP NO. 17774
Date _____

SKETCH OF REFERENCE TIES

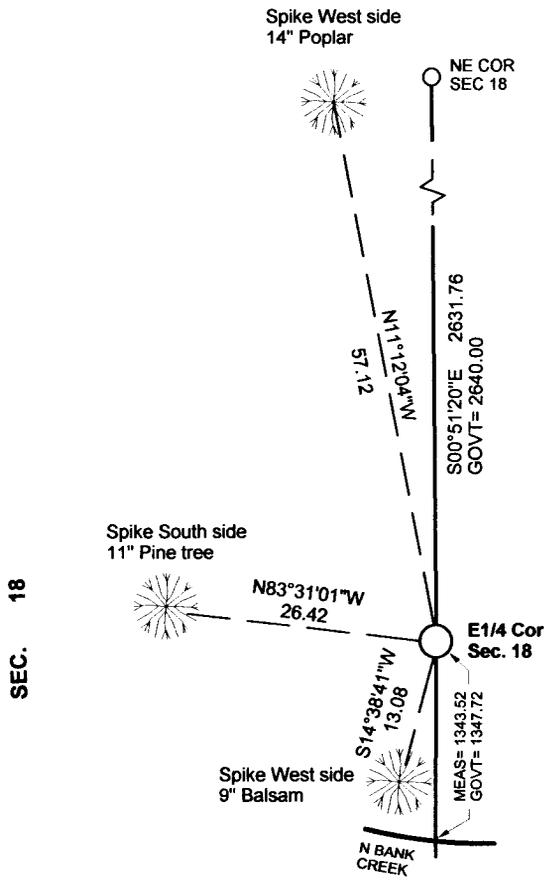

Tie Distances are measured to the spikes.

Cass County Coordinate System (North Zone)
N= 118387.8935 E= 583895.8508

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



SEC. 18

SEC. 17

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R Kohout 25 FEB 2013
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000600391

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

2/13/2014 1:04:09 PM

AS DOC #: A000600391

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR _____ Dep

Page 1 of 2 A000600391



INDEX NO. L.0 – 5.0

STATEMENT OF EVIDENCE

EAST QUARTER CORNER SECTION 18, TOWNSHIP 139N, RANGE 25W, 5TH P.M.

1863 DEPUTY SURVEYORS G.A. JOHNSON AND ALONZO THORNTON IN THE ORIGINAL
GOVERNMENT SURVEY SET A POST AND MARKED B.T.'S. REFERENCES ARE:
 5" SPRUCE N 77 E 28 LINKS 7" W. PINE S 80 W 14 LINKS

2012 MARVIN KOHOUT, LS NO. 17774, AND DOUG STILLE, TECHNICIAN, OF KOHOUT
LAND SURVEYING, SEARCHED FOR EVIDENCE OF THIS CORNER, NOTHING
FOUND. A REROD WITH RLS CAP NO. 17774 WAS SET AT DISTANCES IN
HARMONY WITH HISTORICAL FEATURES CALLED FOR IN THE ORIGINAL
GOVERNMENT SURVEY.