

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 25, Township 139 N., Range 25 W., 5th P.M.  
 State of Minnesota, County of Cass

At the corner location shown on the sketch:


On Oct.31,2013 found a 7/8 in OD pipe stamped 16459 set by Cass County

Surveyors Office on 7/16/2004

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_


### SKETCH OF REFERENCE TIES

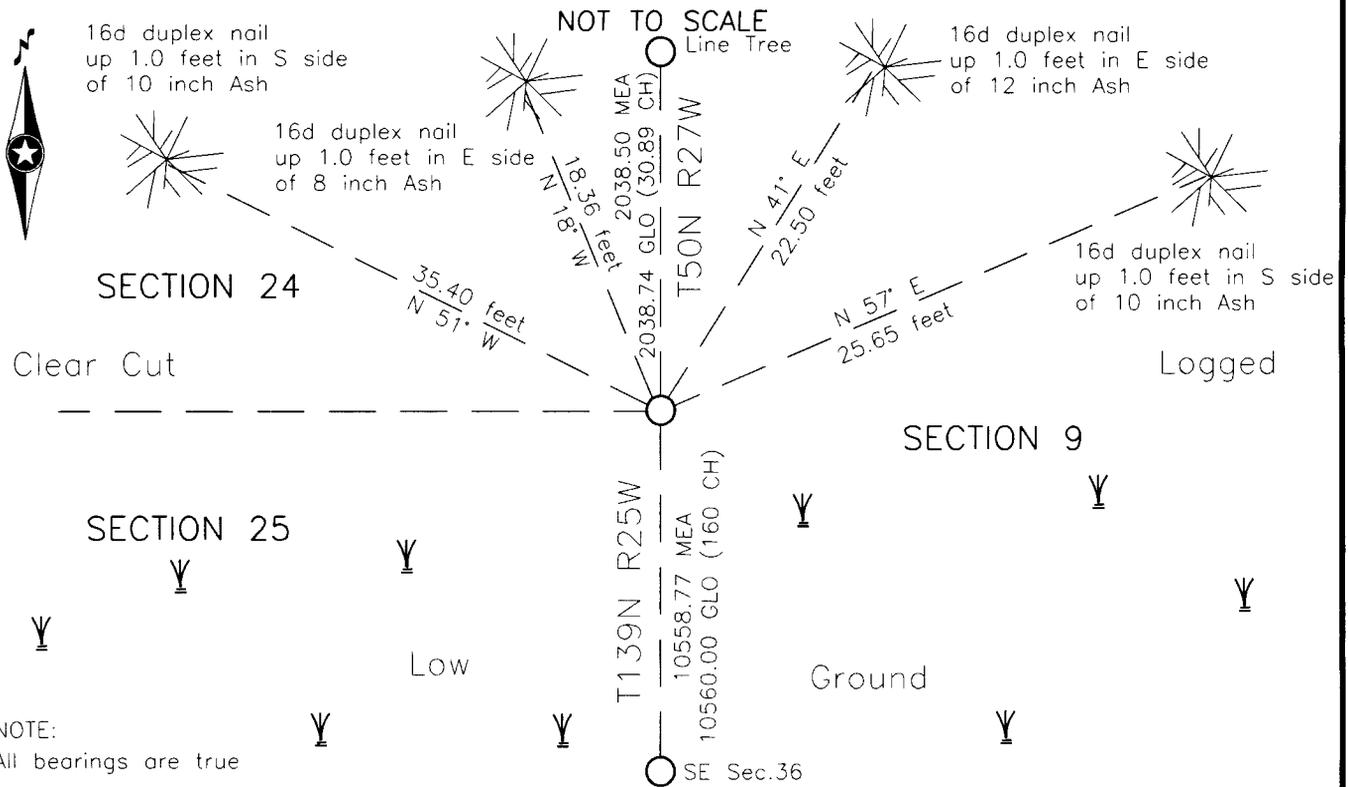

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

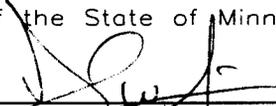  
 Daniel W. Skinner, Land Surveyor  
 Date 2-16-14 MN License No. 40827



**A000600788**  
**OFFICE OF THE COUNTY RECORDER**  
**CASS COUNTY, MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**3/6/2014 11:51:16 AM**  
**AS DOC #: A000600788**  
**PAGES: 2**  
**REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**CASS COUNTY RECORDER**  
 BY SR Dep



**Northeast corner Section 25, Township 139 North, Range 25 West, 5th Principal Meridian.  
Index No. R-25**

Statement of Evidence

Nov.16, 1863 - G.A.Johnson, GLO Deputy Surveyor, set a post for the original corner and referenced it as follows: 10" W. Pine S 59 degrees W 79 links (52.14 feet); 12" Aspen N 61 ¾ degrees W 53 links (34.98 feet).

The above record is on file with the Secretary of State, St. Paul, Minnesota, copies are on file in the Cass County Surveyor's Office (CCSO).

CCSO Files

1937 - CCC personnel, Washburn Lake notes, Book 2, page 17 and 34, on file in the Department of Natural Resources Office (DNR), states set approx. stake 4" Ash 80 CH. from N. Page 34 states at 4847' 4" Post w/yellow tag is 4' South. At 5280' from west set 4" Aspen post blazed on 2 sides.

1941 - CCC personnel, Washburn Lake notes, Emily Game Refuge Book, page 16, on file in the DNR Office, states at 5106.4' from South hit E-W random line 190' east of temp. cor. 3" Ash at 5280' from South set temp corner 5" R. Oak.

Jul.16, 2004 - B.Hippen, CCSO technician, records of the CCSO, set a 7/8 inch outside diameter iron pipe, stamped 16459 up 0.3 foot, at the prorated distance between the recovered Southeast corner of Section 36 and recovered line tree on the East line of Section 24 and made the following witnesses: 10" Ash N 51 degrees W 35.40 feet; 8" Ash N 18 degrees W 18.36 feet; 12" Ash N 41 degrees E 22.50 feet; 10" Ash N 57 degrees E 25.65 feet.

Karvakko Engineering

Oct. 31, 2013 - Karvakko Engineering Survey Crew found a 7/8 inch outside diameter iron pipe stamped 16459. All CCSO 7/16/2004 witnesses were visible and inplace. Verified distances north to the found red oak line tree and south to the southeast corner of this Township. Left monument and witnesses as found.

Analysis of the recovered record data, field evidence and survey measurements, indicated that the monument set using Lost Methods by the CCSO in 2004 is the accepted location of this corner.