



A000600799

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

3/6/2014 11:51:27 AM

AS DOC #: A000600799

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER
 BY SR _____ Dep

Index No. Z-9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 32
 Township 145 N, Range 26 W, 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS


On 10/30/2012, found a(n): 2.5" Brass Cap Stamped RLS#
6807 On 2" Galvanized Iron Pipe, Wired To Sign Post 2' Up

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

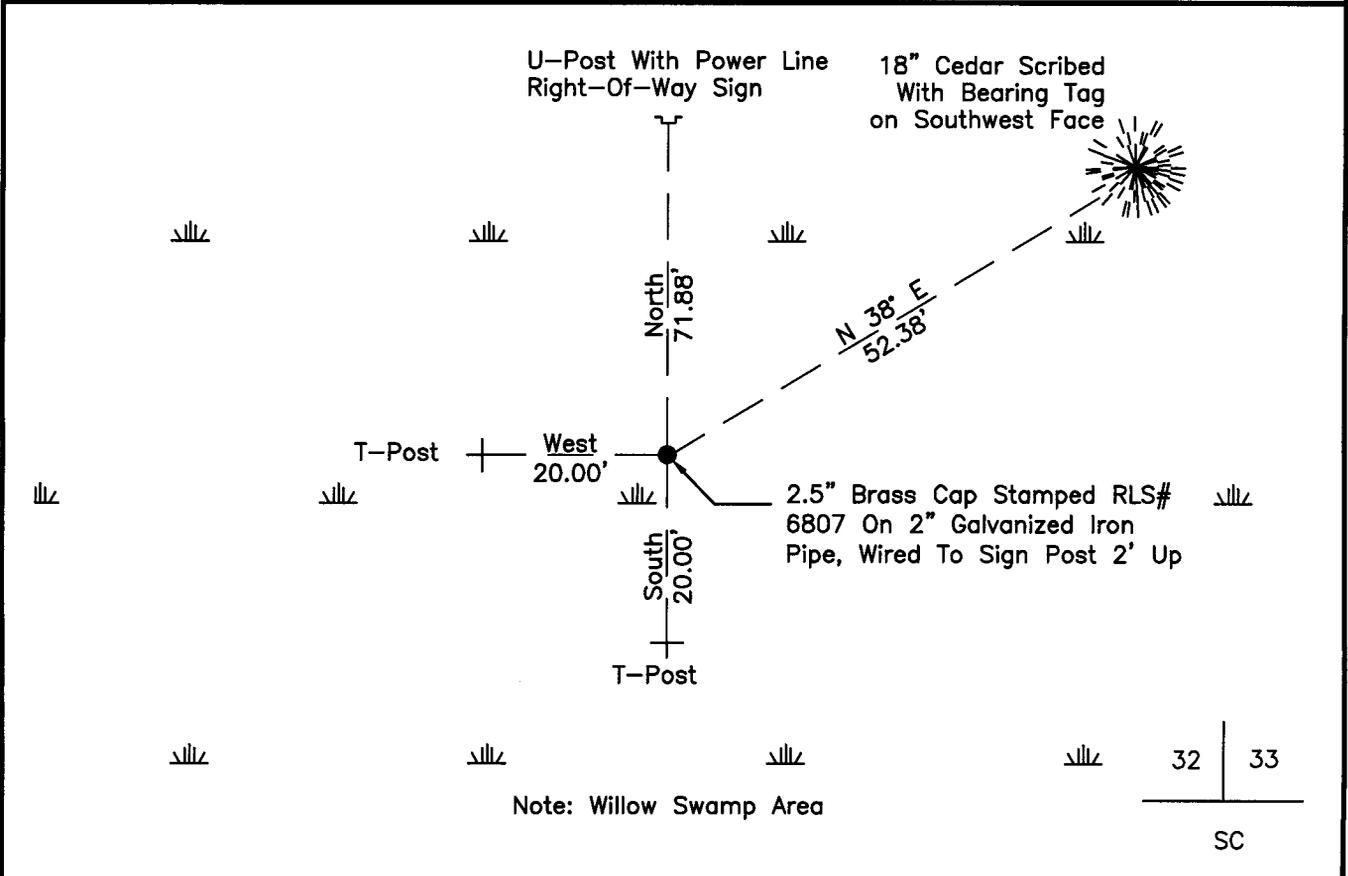

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17197377.350

Easting: 1395284.436

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
 signature

2/28/14
 date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: *Standard Corner common to Sections 32 and 33 of Township 145 North, Range 26 West of the 5th Principal Meridian*

1873; This corner was originally established by George R. Stuntz for the Government Land Office. His notes indicate that a post was set at this position and witnessed by:

Tamarack 15" North 61° East, 75 Links
Cedar 6" North 29° East, 69 Links

1953; R.W. Fasset, USFS, Book 2 of Township 144 North, Range 26 West, page 27, Resurvey established corner by proportional measurement and set a 4" treated post scribed SC 32/33

1971; Curtis Krause USFS, Book 2 of Township 144 North, Range 26 West, page 27, set a 2" dia. 5 ft. long galvanized steel pipe filled with concrete and capped with a 3" Brass tablet stamped 1971, RLS# 6807 in place of post set in 1953 and witnessed.

Cedar 10" North 17° East, 49.6' scribed SC S33 BT
Cedar 12" North 64° East, 27.7' scribed SC S33 BT
Tamarack 9" North 64° West, 55.2' scribed SC S32 BT
Cedar 9" North 13° West, 43.5' scribed SC S32 BT
Steel Post 72" Tall, North, 0.5', with attached Forest Service Signs 54-4 & 54-2
Treated Post 4 Tall, West, 2.2', with attached Forest Service Sign 54-2

Milo Stefan prepared a Certificate of Location and Recorded as Doc# A000246196

1979; Cass County Certificate of Location filed by Milo Stefan, Document No. A000246196

2010; A Kadrmas, Lee & Jackson survey crew found a 3" Brass cap attached to a 2" dia. Galvanized pipe filled with concrete stamped 1971, RLS# 6807, it is located in a swamp with no acceptable ties in the area. Witnesses established as shown on the face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office