



A000600803

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

3/6/2014 11:51:31 AM

AS DOC #: A000600803

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR _____ Dep

Index No. Z-15

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard South Quarter Corner of Section 34
 Township 145 N , Range 29 W , 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS


On 8/23/2011, found a(n): 3" Brass Cap on a 2" Galvanized Iron Pipe, 1.8' Above Ground RLS # 6807, 1969

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)


(reserved for recording data)

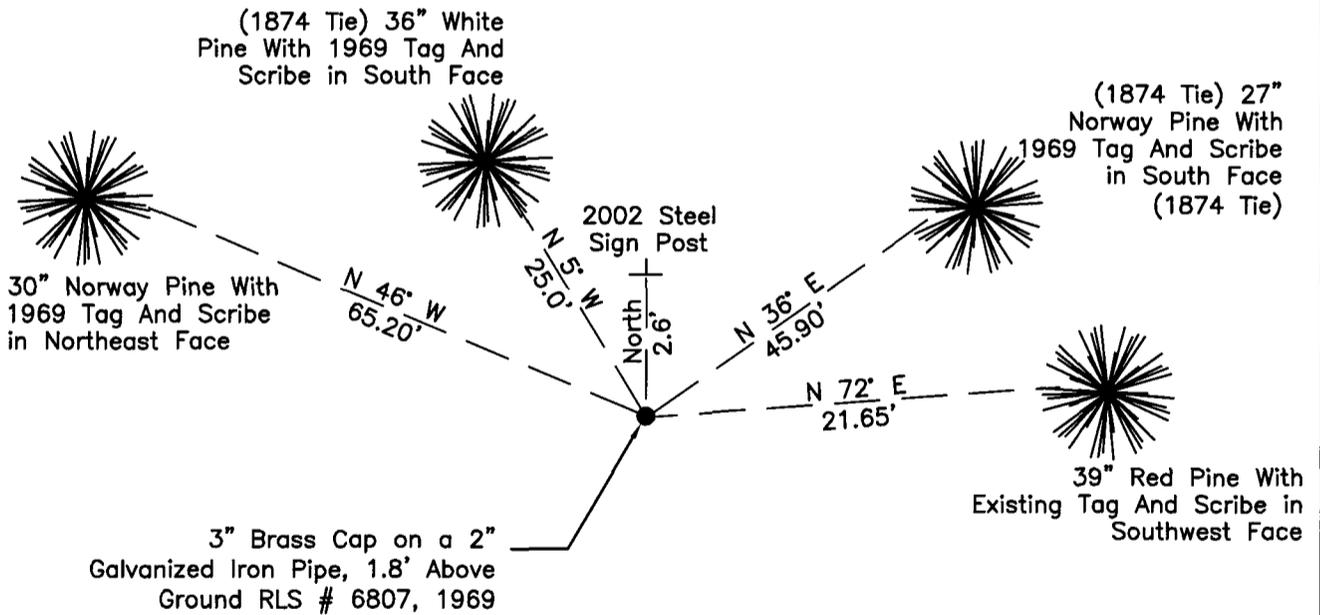

34

SC

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17198435.206

Easting: 1307669.444

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
 signature

2/28/14
 date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Standard South Quarter Corner to Section 34 of Township 145 North, Range 29 West of the 5th Principal Meridian.

1871; This corner was originally established by P.H. Conger for the GLO. His field notes indicate that this corner position was marked with a post and witnessed by:

White Pine 10" North 5° West, 38 Links
Yellow Pine 8" North 36° East, 58 Links

1969; USFS Book 1 of Township 145 North, Range 29 West, page 27, show Curt Krause, while working for William Okerman, RLS #6807, found the remains of both original bearing trees. The proceeded to set a 2" dia. 5' long galvanized steel pipe filled with concrete and capped with a 3" Brass tablet stamped "RLS No. 6807." Notes show the corner 220' north of a pipeline and 250' east of an old forest road. An Affidavit as to Location of Government Corner is filed at the Cass County Office of Register of Deeds under document no. A000590411. Corner witnessed by:

White Pine 32" North 5° West, 25.0' scribe visible (1874 Tie)
Red Pine 24" North 36° East, 34.0' scribe visible (1874 Tie)
Norway Pine 22" North 46° West, 65.20' scribed SC¼ S34 B.T.
Norway Pine 19" North 1° East, 45.90' scribed SC¼ S34 B.T.
Elm 8" South 37° East, 8.60' scribed "X" B.T.
6' Steel Sign Post East, 2.7' FS 54-4 sign attached

2002; USFS Book 1 of Township 145 North, Range 29 West, page 27, show R. Main, USFS, found monument in place, 2' above ground witnessed by:

White Pine 32" North 5° West, 25.0' scribe visible (1874 Tie)
Red Pine 24" North 36° East, 34.0' scribe visible (1874 Tie)
Norway Pine 22" North 46° West, 65.20' scribed SC¼ S34 B.T. (1969 Tie)
Norway Pine 19" North 1° East, 45.90' scribed SC¼ S34 B.T. (1969 Tie)
Downed Elm 8" South 37° East, 8.60' scribed "X" B.T. (1969 Tie)
New 8' Steel Sign Post North, 2.6'
Found FSLP Aspen 15" North, 169' marked: "Krause 7-7-69"

2010; A Kadrmas, Lee & Jackson survey crew found a 2" galvanized iron pipe with a 3" Brass Cap stamped RLS #6807, 1.8' above ground and four existing bearing trees and the FSLP. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Surveyors Office
United States Forest Service

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office

Cass County Engineers Office
Northern Engineering and Consulting Inc.
MnDOT – District Office 2