

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 35
Township 145 N, Range 27 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600931

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/13/2014 11:37:34 AM

AS DOC #: **A000600931**

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

On 05/19/2010, found a(n): 2" Galvanized Pipe, 3.5" Brass
Cap, USFS Monument RLS# 3628

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

24" Norway Pine,
Existing Tag On South
Face, 1996 BT

30" Norway Pine,
Existing Tag On South
Face, 1996 BT

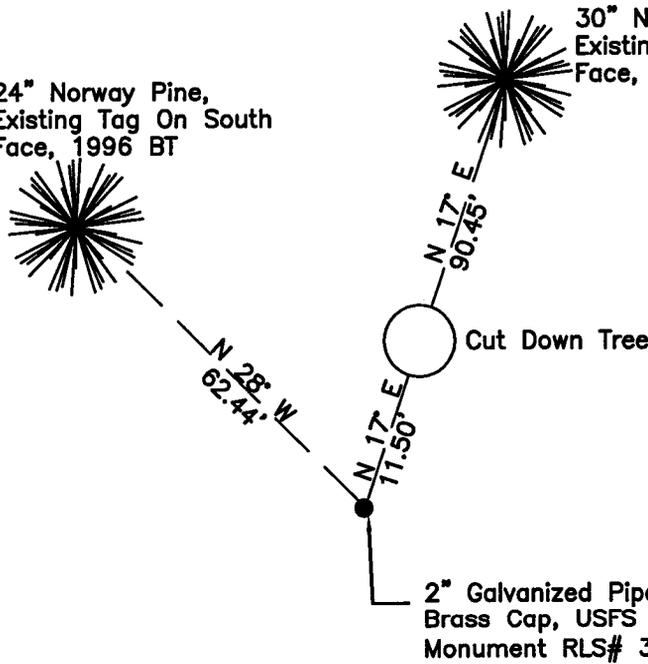

26	25
35	36



"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17202945.880

Easting: 1379580.971

NAD 83/1996 HARN Adjustment.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/26/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000600931



STATEMENT OF EVIDENCE: Corner common to Sections 25, 26, 35 and 36 of Township 145 North,
Range 27 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

Norway Pine 16" North 2° East, 36 links
Jack Pine 5" North 6° West, 38 links
Tamarack 3" South 21° West, 30 links
Spruce 3" South 19° East, 42 links

1898; Great Northern Railroad Right-of Way Plat 1804CS7 shows an angle and distance tie to this corner location. Information is on file with the Minnesota Department of Transportation.

1924; CCC notes of the Minnesota National Forest in Township 145 North, Range 27 West, on file with the USFS show that Hiram K. Wright, Forest Ranger, found a spruce stake four feet high, marked with the four section numbers witnessed by:

Norway Pine 23" in Sec 25
Jack Pine 8" in Sec 26

1934; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that H.A. Brills, Chief of Party, found a squared stake, rotten at ground line 36" x 4" x 4" witnessed by:

Stump 24" North 23° East, 34 links
Jack Pine 12" North 33° East, 18 links with Metal Location Poster

1958; USFS notes Book 1 of Township 145 North, Range 27 West, page 8, show that Joseph F. Lausche, while working for Peter Meyer, RLS #3628, recovered two remaining original bearing trees and remonumented the corner with a 2" dia. 5' long galvanized wrought iron pipe filled with concrete and capped with a 3" stamped bronze tablet witnessed by:

Jack Pine 13" North 6° West, 38 Links scribe visible (1873 Tie)
Red Pine Stub 20" North 12° East, 36 Links scribe visible (1873 Tie)
Tamarack 6" South 75° West, 26.9' mkd. T 145 R 27 S 35 BT
Tamarack 7" South 26° West, 20.4' mkd. T 145 R 27 S 35 BT
Spruce 8" South 34° East, 9.3' mkd. T 145 R 27 S 36 BT
Jack Pine 17" North 18° East, 11.7' mkd. T 145 R 27 S 25 BT
FSLP on a Jack Pine 17" South 18° West, 130'

1996; USFS notes Book 1 of Township 145 North, Range 27 West, page 8, show that R. Main and C. Krause found a 2" iron pipe in place at edge of swamp. Base of pipe is 12" above water in swamp witnessed by:

Jack Pine Stump North 6° West, 25.1' scribe visible (1873 Tie)
48" Long Piece of Norway Pine Stub North 12° East, 23.8' (1873 Tie)
Tamarack 8" South 75° West, 26.9' scribe grown over (1958 Tie)
Windfall Tamarack 7" South 26° West, 20.4' (1958 Tie)



Spruce Stump 8" South 34° East, 9.3' (1958 Tie)
Jack Pine 19" North 18° East, 11.7' scribe visible (1958 Tie)
Norway Pine 12" North 17° East, 90.45' mkd. S 25 BT
Norway Pine 20" North 28° West, 62.44' mkd. S 26 BT
8' Steel Sign posts South 5.4' and West 5.25'

2010; A Kadrmas, Lee & Jackson Survey crew completed a field search for this corner position and found a 2" galvanized iron pipe, 3 ½" Brass Capped USFS monument RLS #3628, witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of this corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office