



A000600958

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/13/2014 2:29:44 PM

AS DOC #: A000600958

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2
A000600958

Twp 137 Rge 30 Index No. P.0-25.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter of Section 24, Township 137 N., Range 30 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 17 Aug. 2010 found a charred wood post, down 3 feet, in excavation.


left monument as found lowered monument removed monument (explain)

On 3 June 2011 placed a 1 by 32 inch aluminum tube with aluminum cap,
down 0.05 foot, on centerline of County Road Number 1.

Monument

SKETCH OF REFERENCE TIES

NOT TO SCALE

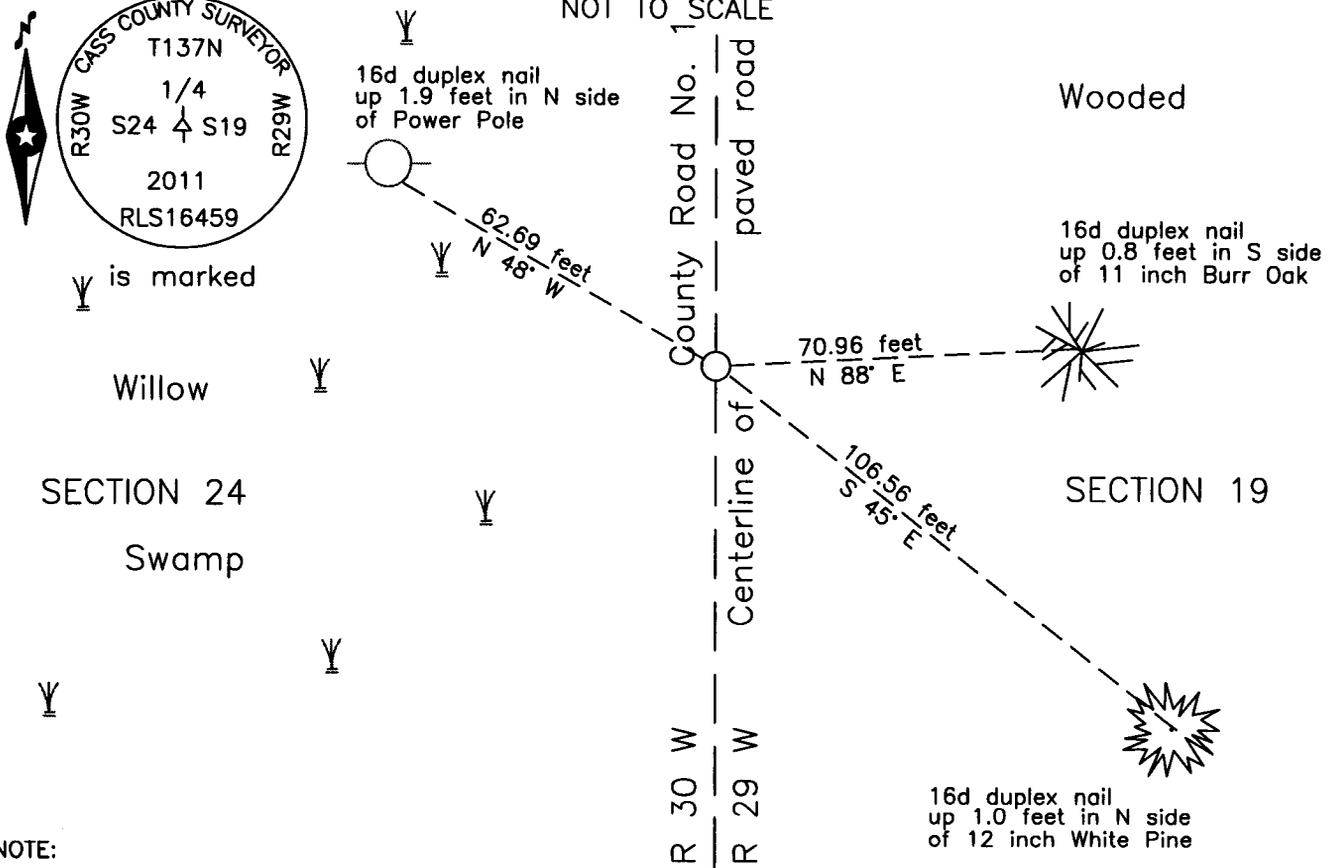

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 3/12/14 MN License No. 21367



Index No. P.0-25.0

Statement of Evidence

East Quarter corner of Section 24, Township 137 North, Range 30 West, 5th Principal Meridian.

July 1865 G.B. Wright, General Land Office Deputy Surveyor set a post for the original corner in the survey of the east line of Township 137 North, Range 30 West and referenced it as follows:
7" Tamarack S 73 1/2° W 24 links (15.8 feet) 7" Tamarack S 70° E 8 links (5.3 feet)
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

1953 Cass County Highway Department(CCHD), S.A.P. 11-508-05, on file in the CCHD, plan indicates 1/4 Sec. Line at Station 133+51.

May 2000 B.Hippen and C. Loe, technicians, notes of the CCHD/SO, on file in the CCHD/SO, found a capped iron pipe, flush with the bituminous. LS 17253. Located at centerline of CSAH # 001 and 18' North of centerline entrance East. Located 179' North of 5 wire main overhead power line.
10" W. Oak N 78° E 73.82 feet 10" W. Pine S 52° E 98.74 feet
P. Pole N 31° W 72.84 feet

Aug. 2002 B. Grivna, LS. 17253, certificate of survey, on file in the CCHD/SO, indicates iron monument found in place.

Aug. 2010 B.Hippen, technician and P. Swentkofske, CCHD equipment operator, notes on file in the CCHD/SO, prior to reconstruction of CSAH # 001, excavated a 6 foot east-west by 30 foot north-south area based on record dimensions. The dig was 3 feet deep to natural ground. A charred wood post was recovered.

June 2011 B. Hippen, technician, notes on file in the CCSO, set an aluminum Cass County monument at the charred post location. New witnesses were established as follows:
11" B. Oak N 88° E 70.96 feet Power Pole N 48° W 62.69 feet
12" W. Pine S 45° E 106.56 feet

The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the CCSO in 2011 is the correct perpetuation of this corner.

County Coordinates (Cass County South)

Northing 286486.10
Easting 514584.62