

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard South Quarter Corner of Section 34  
Township 145 N, Range 27 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



**A000601093**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

**3/20/2014 11:04:07 AM**

**AS DOC #: A000601093**

**PAGES: 2**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR Dep

On \_\_\_\_\_, found a(n): \_\_\_\_\_  
DATE


- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 2/23/2012, set a(n): 3.5" Aluminum Cap on 7' Aluminum Rod With Magnet Attached, 6" Above Ground  
DATE


See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: Swamy, Slough, No Trees, Bog

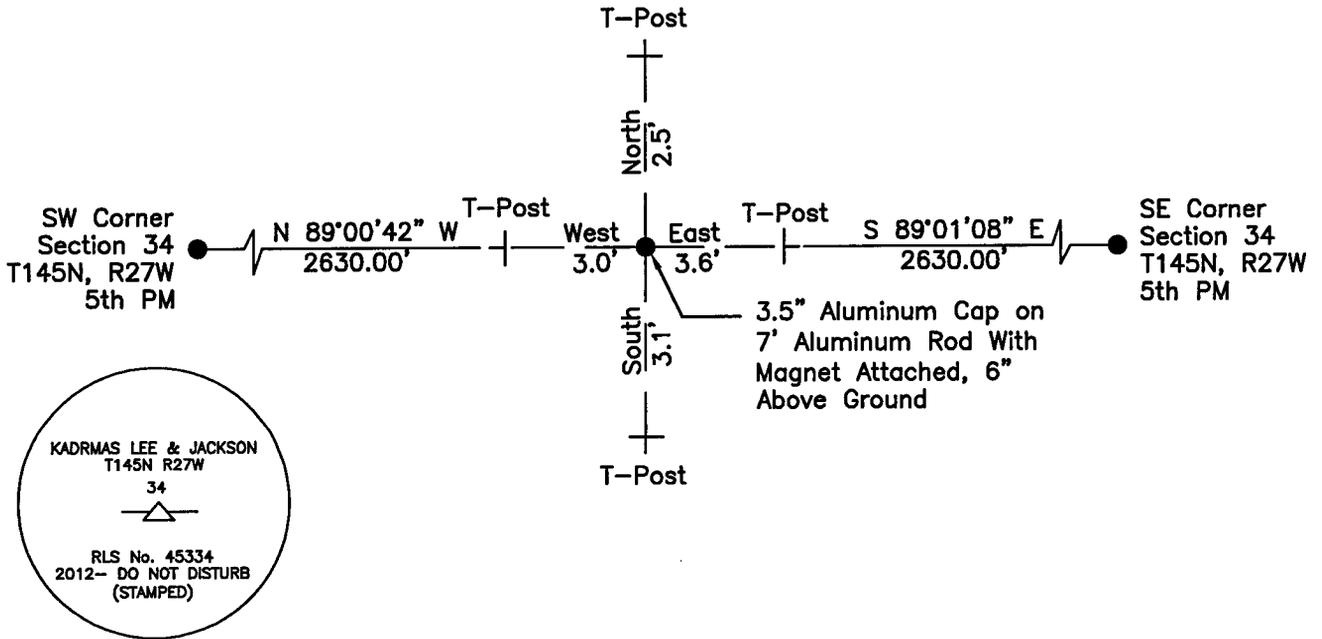

## "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17197733.200

Easting: 1371537.996

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/25/13  
date

Ross Wamre, Minnesota License No. 45334



**STATEMENT OF EVIDENCE:** Standard South Corner common to Section 34 Township 145 North, Range 27 West of the 5<sup>th</sup> Principal Meridian.

**1871;** G.R. Stuntz, for the Government Land Office established this corner and witnessed by:

Tamarack 7" dia. North 30° West, 10 Links  
Tamarack 7" dia. South 28° East, 32 Links

**1937;** GLO dependent resurvey of the Eleventh Standard Parallel North, along the South boundary of Township 145 North, through a portion of Range 26 West and through Range 27 West, 5th Principal Meridian. Hal D. Craig, set at proportionate distance an iron post, 3' long, 1" in dia., 28" in the ground with a brass cap marked SC ¼ S 34 1937

Tamarack 6" dia. North 21° East, 27 Links marked SC ¼ S34 BT  
Tamarack 7" dia. North 31° West, 6 Links marked SC ¼ S34 BT

**2010;** A Kadrmas, Lee, & Jackson survey crew found no evidence of the iron post or any of its accessories.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information set a 3 ½" Aluminum Cap on a 7' Aluminum Rod with magnet attached, 6" above ground at a lost single proportionate measurement location according to the BLM dependent resurvey. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office