

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 35
Township 145 N, Range 27 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601096

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

3/20/2014 11:04:10 AM

AS DOC #: A000601096

PAGES: 3

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 05/20/2010, found a(n): 6" concrete monument with a 3.5" Brass Cap stamped 1937

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

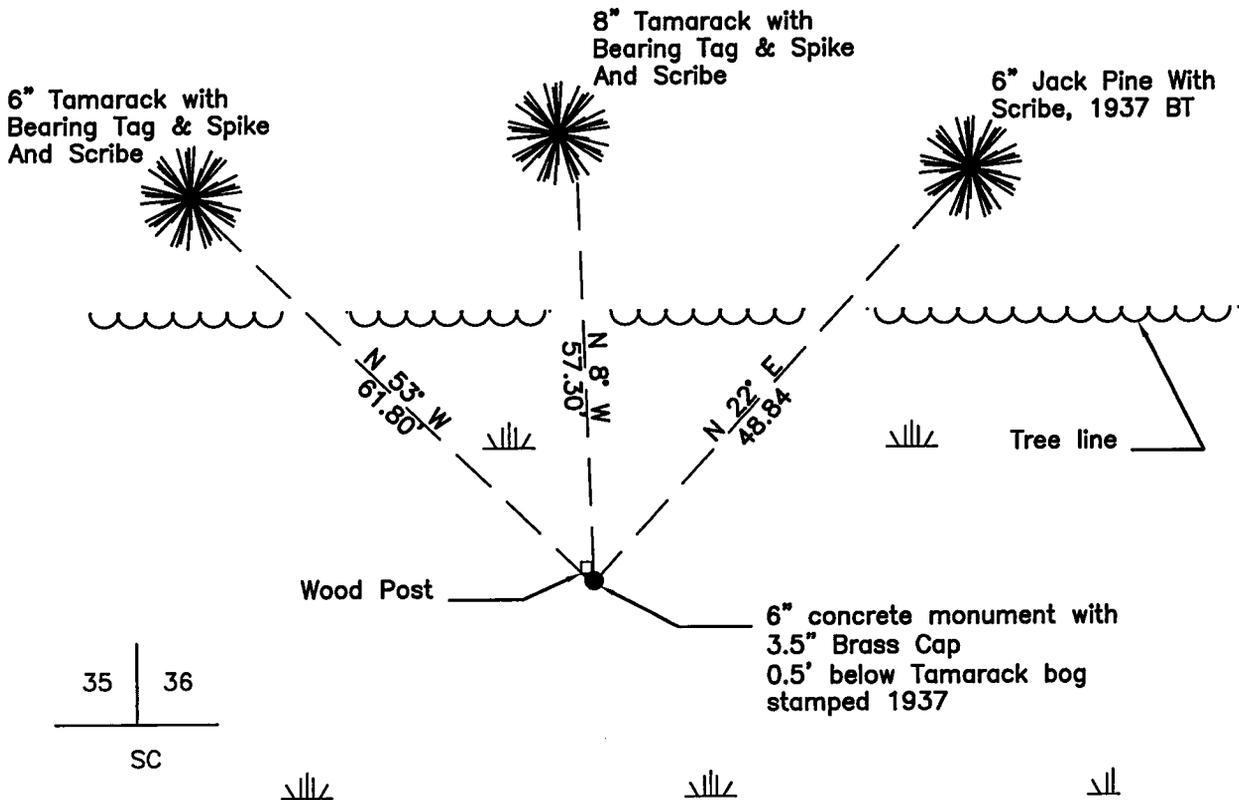

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17197600.000

Easting: 1379427.578

NAD 83/1996 HARN Adjustment.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/25/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000601096



STATEMENT OF EVIDENCE: Standard Corner to Sections 35 and 36 of Township 145 North, Range 27 West of the 5th Principal Meridian.

1871; G.R. Stuntz, for the Government Land Office established this corner and witnessed by:

Tamarack 5" South 33° East, 109 Links
Aspen 6" North 89 ½° West, 493 Links

1929; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that H.C. Johnson, Estimator, found a scribed stake 40" above the ground witnessed by:

FSLP Jack Pine 7" North 35° East, 62 Links

1934; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that Earl M. Handy, Chief of Party, found an old but fairly solid square stake 30" above the ground witnessed by:

FSLP on the NE Face of a Jack Pine 8" SW, 5 Links
Line Post on Highway No. 8 is 40 chains due North of Corner

1936; USFS 874 form on file at the USFS office in Cass Lake, MN, shows that T. Fairbanks, CCC, set a new squared stake at this corner location witnessed by:

Norway Pine 20" South 46 West, 103 Links
FSLP on the E Face of a Spruce 6" North 75 West, 0.2 chains

1937; Resurvey by Hal D. Craig for the GLO reestablished this corner from an original bearing tree and set a concrete monument 2' long, 6" diameter, 18" in the ground with a 3.5" stamped Brass tablet, witnessed by:

Tamarack snag 6" South 33° East, 109 Links mkd BT (1873 Tie)
J. Pine 6" North 22 ¼° East, 74 Links mkd SC T145N R27W S36 BT
J. Pine 6" North 43° West, 83 Links mkd SC T145N R27W S35 BT

2010; A Kadrmas, Lee & Jackson survey crew found a 6" concrete monument with a 3.5" Brass Cap stamped 1937, 0.5' below Tamarack bog, witnesses found and established as shown on the face of this certificate.

J. Pine 6" North 22 ¼° East, 48.84' 74 Links (1937 Tie)
Tamarack 8" North 8° West, 57.3'
Tamarack 6" North 53° West, 61.8'

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office



Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office