



A000601377

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/3/2014 11:29:48 AM

AS DOC #: A000601377

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Index No. A-9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Closing Corner of Section 5
Township 144 N, Range 26 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



On 03/25/2010, found a(n): 2" Galvanized Iron Pipe With A
3" Brass Tablet In Concrete Stamped "RLS# 6807, 1971", 3.5' Above
Ground

left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

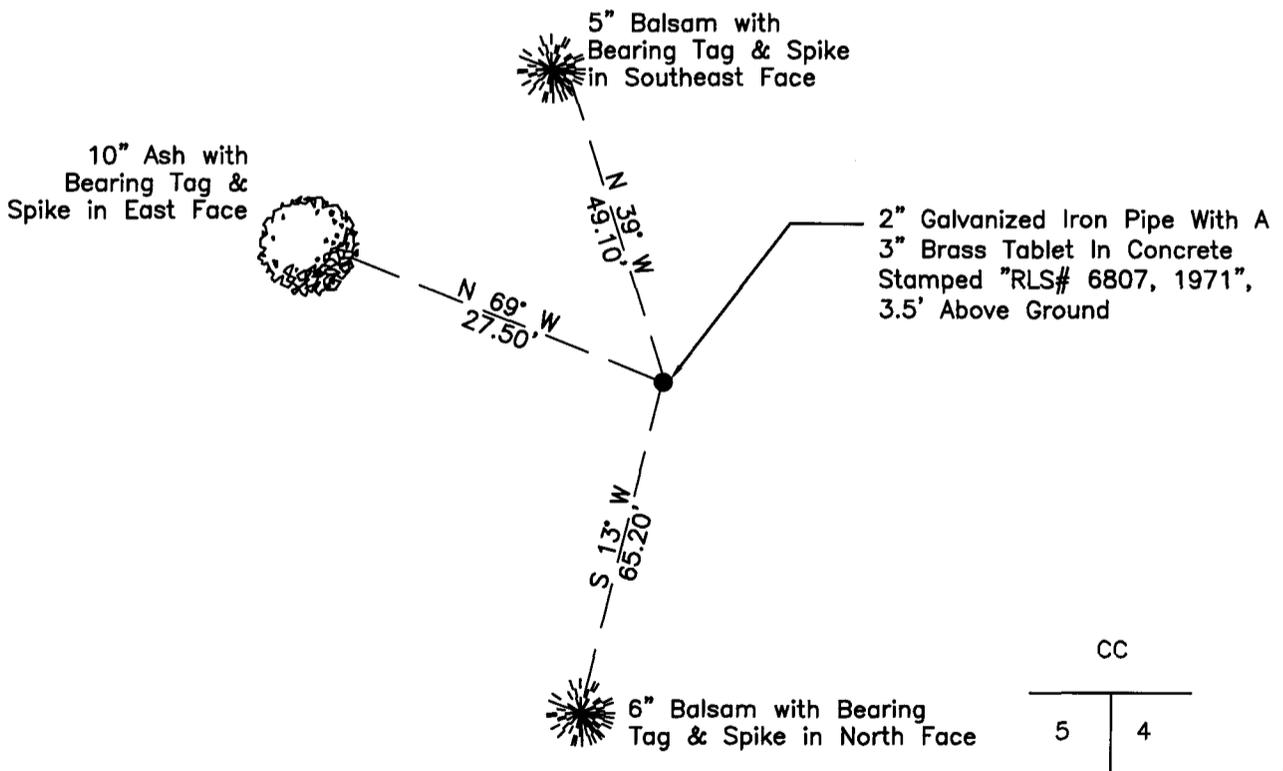

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17197370.000

Easting: 1395633.243

NAD 83/1996 HARN Adjustment.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

3/24/14
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2
A000601377





STATEMENT OF EVIDENCE: Closing Corner common to Sections 4 and 5 of Township 144 North, Range 26 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the Government Land Office. His notes indicate that a post was set at this position and witnessed by:

Aspen 4" South 17° East, 19 Links
Aspen 3" South 59° West, 24 Links

1953; Resurvey by R.W. Fassett , USFS, Book 2 of Township 144 North, Range 26 West, page 28 set a 4" treated post scribed SC 4/5 and witnessed by:

6" Balsam South 3° East, 15 Links with FSLP tag
8" Balsam South 46° West, 59 Links
8" Balsam North 55° East, 26 Links

1971; Curtis Krause, USFS, Book 2 of Township 144 North, Range 26 West, page 28 set a 2" dia. 5 ft. long galvanized steel pipe filled with concrete and capped with a 3" brass tablet stamped 1971, RLS# 6807 and witnessed by:

Balsam 6" South 41° East, 31.2 ft, scribed CC S4 BT
Ash 6" South 14° East, 53.2 ft, scribed CC S4 BT
Aspen 8" South 39° West, 41.3 ft, scribed CC S5 BT
Aspen 6" South 69° West, 26.6 ft, scribed CC S5 BT
72" sign post set South, 2.4 ft, with FS signs 54-2 and 54-4 attached
4" treated post set East, 2.3 ft, with sign 54-2 attached

1979; Cass County Certificate of Location filed.

2010; A Kadrmas, Lee & Jackson survey crew found a 3" Brass tablet in concrete stamped 1971, RLS# 6807 and witnessed. Witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office