

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 18
Township 145 N, Range 30 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601381

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/3/2014 11:29:52 AM

AS DOC #: A000601381

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 04/19/2010, found a(n): 6" concrete monument with a 3.5" Brass Cap stamped 1933, 2" Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

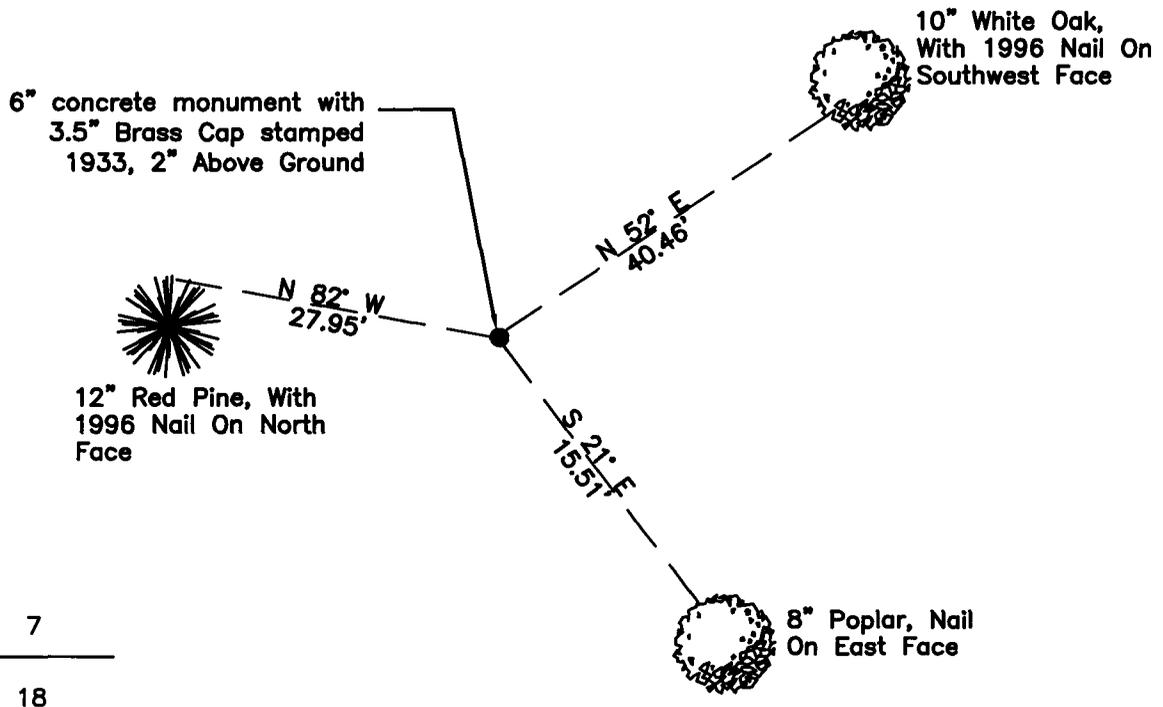

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17220200.410

Easting: 1260419.519

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 7 and 18 of Township 145 North, Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a wood post set at this corner position, witnessed by:

N. Pine 24" North 9^o East, 8 links

1933; Resurvey by GLO, Willis W. Bandy, from remains of original bearing tree, N. Pine stump blaze burned over, set a 6" diameter, 24" long concrete cylinder with stamped Brass Cap and witnessed by:

N. Pine 24" North 9^o East, 8 links (1874 tie)

New BT:

Red Oak 8" North 20 3/4^o East, 23 links

N. Pine 5" South 3 3/4^o West, 152 links

Corner falls in Upland 30 links North of Swamp

1934; J.A. Gjelhaug, CCC, RLS# 1337, USFS 874 forms, found a 6" concrete monument with a brass cap, 5" above ground. Information on file with the USFS office in Cass Lake.

1996; C. Krause, R. Main and M. Hayes, USFS Book 2 of Township 145 North, Range 30 West, page 45, found GLO monument flush with ground and remains of the 1933 and original bearing trees. Corner is 30' south of old trail.

N. Pine (burned stump) North 9^o East, 8 links (1874 tie)

Red Oak (downed) 12" North 20 3/4^o East, 15.18 ft. (1933 tie)

N. Pine (stump) South 3 3/4^o West, 100.32 ft. (1933 tie)

New BT:

Red Pine 8" North 82^o West, 27.95' marked 1/4 S 7 BT

White Oak 7 1/2" North 52^o East, 40.46' marked 1/4 S 7 BT

8' Steel Sign Post, East 4.5'

2010; A Kadrmas, Lee & Jackson survey crew found a 6" concrete monument with a 3.5" Brass Cap Standard GLO monument stamped 1933, 2" above ground. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Surveyors Office

United States Forest Service

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office

Cass County Engineers Office

Northern Engineering and Consulting Inc.

MnDOT – District Office 2