

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 16
Township 145 N, Range 30 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601384

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/3/2014 11:29:55 AM

AS DOC #: A000601384

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 04/20/2010, found a(n): 2" Iron Post with a 2" Brass cap stamped 1933, 1.0' Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____


See "Statement of Evidence" for further details (on back)

(reserved for recording data)

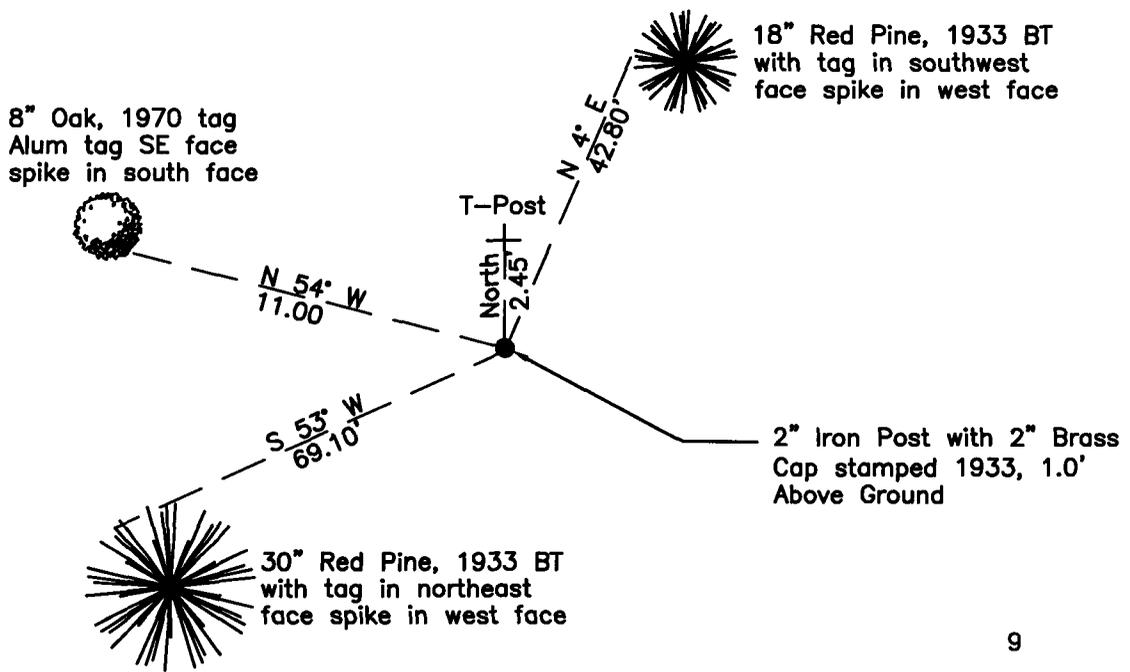

9

16



"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17220044.730

Easting: 1271531.456

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 9 and 16 of Township 145 North, Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the Government Land Office. His field notes indicate a wood post set at this corner position, witnessed by:

- Yellow Pine 24" South 85° East, 60 links
- Black Pine 20" North 84° East, 40 links

1933; Resurvey by GLO, Willis W. Bandy, found no evidence of the original post or bearing trees. Set by lost proportionate measurement, an iron post, 3' long, 2" diameter, 27" in the ground with stamped brass cap. Witnessed by:

- Norway Pine 4" North 4° East, 65 links - mkd. ¼ S9 BT
- Norway Pine 16" South 50° West, 105 links - mkd. ¼ S16 BT

1933; J.A. Gjelhaug, CCC,R LS# 1337, USFS 874 forms, found a 1 ½" Brass Capped Iron Pipe witnessed by. Information on file with the USFS office in Cass Lake.

- Norway Pine 18" South 52° West 104 links – mkd ¼ S16 BT (1933 GLO tie)
- Norway Pine 4" North 7° East 64 ½ links – mkd ¼ S9 BT (1933 GLO tie)

1970; L. M., USFS Book 1 of Township 145 North, Range 30 West, page 56, found corner with 1933 GLO BT's and witnessed.

- Norway Pine 25" South 53° West, 69.10' to spike, scribe visible (1933 GLO tie)
- Norway Pine 16" North 4° East 42.80', to spike, scribe visible (1933 GLO tie)
- White Oak 7" North 54° West, 11.0', set tag
- 8' Steel Sign Post North 2.45'

1998; R. Main, USFS Book 1 of Township 145 North, Range 30 West, page 56, found GLO iron in good condition. Placed FSLP on 14" Red Pine on east side of FR from which corner bears East ±200' corner in mature Red Pines.

2010; A Kadrmas, Lee & Jackson survey crew found a 2" Iron Post with a 2" Brass cap stamped 1933, 1.0' above ground and three existing B.T.s. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

- | | |
|--|--|
| Cass County Recorder's Office | Cass County Engineers Office |
| Cass County Surveyors Office | Northern Engineering and Consulting Inc. |
| United States Forest Service | MnDOT – District Office 2 |
| Bureau of Indians Affairs – Bemidji | |
| Bureau of Land Management's (BLM) Northeastern States Field Office | |