

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 17  
Township 145 N, Range 30 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000601387

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/3/2014 11:29:58 AM

AS DOC #: A000601387

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


On 06/18/2010, found a(n): 2" Iron Pipe With A Brass Cap  
DATE  
Stamped 1933, Standard, 0.5' Above Ground

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_  
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

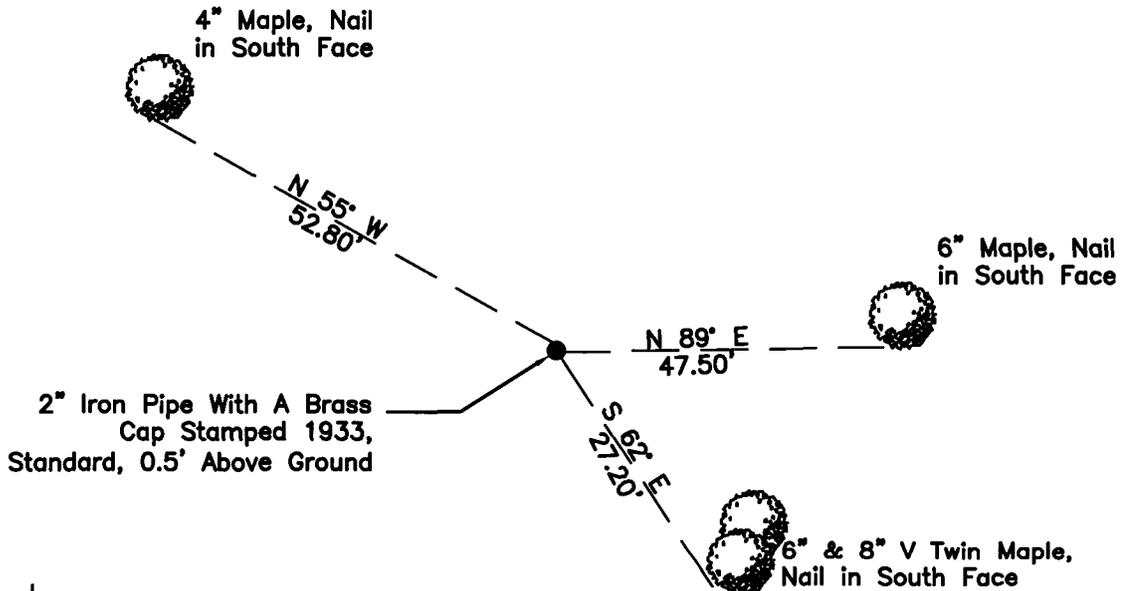

17 | 16

## "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17217485.130

Easting: 1268804.964

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

7/8/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000601387





**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 16 and 17 of Township 145 North, Range 30 West of the 5<sup>th</sup> Principal Meridian.

**1874;** This corner was originally established by P. H. Conger, and his original field notes indicate a wood post set at this corner position, witnessed by:

Ironwood 5" North 60° West, 13 Links  
Aspen 10" South 30° East, 30 Links

**1933;** Resurvey by GLO, Willis W. Bandy, found no original evidence of the corner. He then set an iron post 3 ft. long, 2" dia., 27" in the ground with a brass cap marked ¼ S17 S16 1933 by proportional measurement and witnessed by:

Poplar 6" dia. South 76° East, 36 Links (23.76 ft.) marked ¼ S16 BT  
Poplar 8" dia. North 80¼° West, 30 Links (19.8 ft.) marked ¼ S17 BT

**1934;** USFS 874 form, on file at the USFS office in Cass Lake, MN shows J.A. Gjelhaug, RLS #1337, found a 1 ½" dia. Iron Pipe with a stamped brass cap 6" above ground witnessed by:

Aspen 10" North 78° West, 19 1/8 Links marked "¼ S17 BT" (1933 tie)  
Aspen 6" North 79° East, 36¼ Links marked "¼ S16 BT"

**1946;** State of Minnesota Department of Highways Right-of-Way Index map file 32-86 shows a 2" Iron Pipe with Brass Cap in place with an angle and distance tie to US Highway No. 2. Information is on file with the Minnesota Department of Transportation.

**2010;** A Kadrmas, Lee & Jackson survey crew found a 2" dia. Iron Pipe with a stamped brass cap standard GLO Monument, 0.5' above ground, witnesses found and established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office