

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 15
Township 145 N , Range 30 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601388

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/3/2014 11:29:59 AM

AS DOC #: A000601388

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 04/21/2010, found a(n): 1" Iron Pipe with a 2" Brass
DATE
Cap stamped 1933, 1.0' Above Ground

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

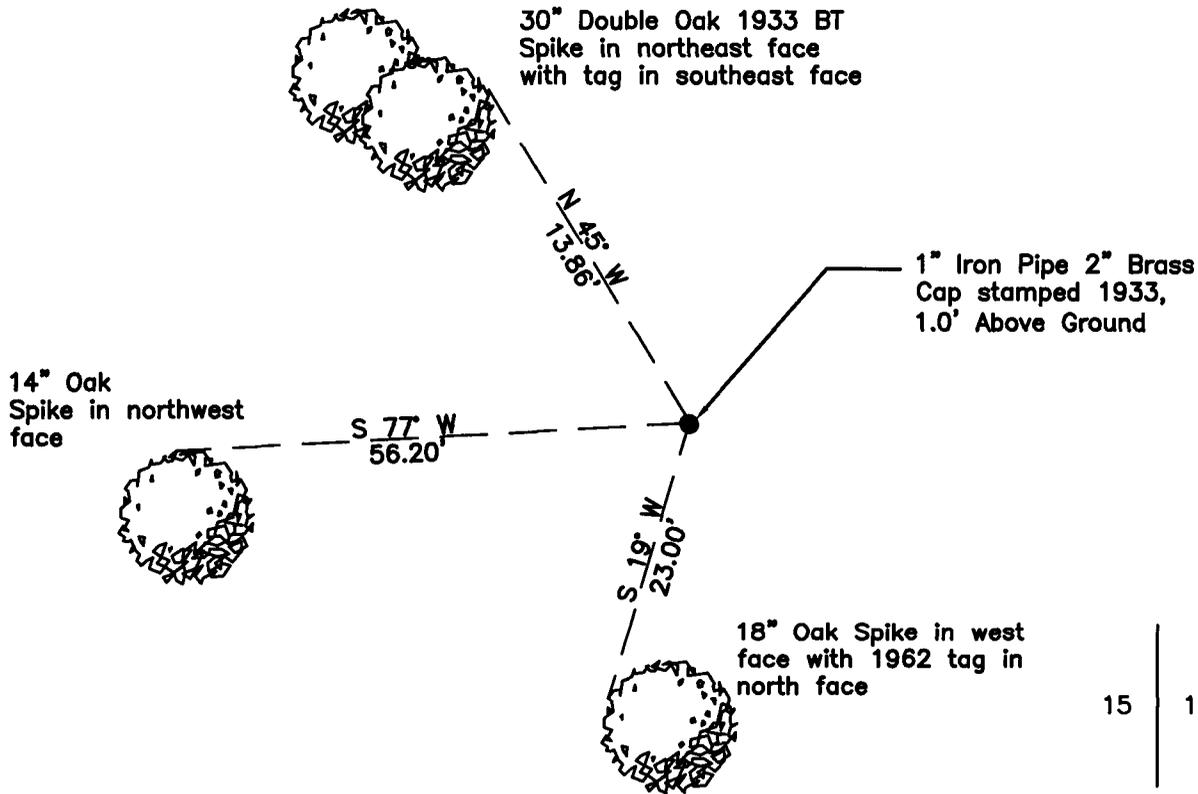

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17217231.240

Easting: 1279217.508

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 14 and 15 of Township 145 North, Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a wood post set at this corner position, witnessed by:

White Pine 40" North 38^o East, 9 links
Aspen 6" South 88^o West 34 links

1916; Railroad Valuation Map: 1804CS3. Minneapolis St. Paul & Sioux St. Marie Railway Company's Right of Way and Track Map shows an angle and distance tie to the railroad from this corner. Map is on file with the Minnesota Department of Transportation.

1933; Resurvey by GLO, Willis W. Bandy, from remains of original bearing trees set an iron post, 3' long, 1" diameter 27" in the ground with brass cap.

White Pine (burned stub) 40" North 38^o East, 9 links (1874 tie)
Poplar (Aspen) snag 12" South 88^o West, 34 links, with old scribe (1874 tie)
Burr Oak 6" South 86 ¼^o East, 42 links - mkd ¼ S14 BT
Burr Oak 6" North 45 ¼^o West, 21 links - mkd ¼ S15 BT

1946; State of Minnesota Department of Highways Right-of-Way Map Index map file 32-86 shows a 2" pipe with brass cap in place at this corner location. Information on file with the Minnesota Department of Transportation.

1962; Peter J. Meyer, RLS #3628, and R.H. McDonald, USFS Notes Book 1 of Township 145 North, Range 30 West, page 75, found the iron post with brass cap marking corner and one original bearing tree and both 1933 BT's. An Affidavit as to Location of Government Corner is filed with the Cass County Office of Register of Deeds. Corner is witnessed by:

White Pine (burned stub) North 38^o East, 5.94' (1984 tie)
Burr Oak 10" South 86 ¼^o East, 27.72' (1933 tie)
Burr Oak 12" North 45 ¼^o West, 13.86' (1933 tie)
Oak 12" South 19^o West, 23.0' - mkd ¼ S15 BT

2010; A Kadrmas, Lee & Jackson survey crew found a 1" Iron Pipe with a 2" Brass cap standard GLO monument stamped 1933, 1.0' above ground. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

- | | |
|--|--|
| Cass County Recorder's Office | Cass County Engineers Office |
| Cass County Surveyors Office | Northern Engineering and Consulting Inc. |
| United States Forest Service | MnDOT – District Office 2 |
| Bureau of Indians Affairs – Bemidji | |
| Bureau of Land Management's (BLM) Northeastern States Field Office | |