

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 19
Township 145 N , Range 30 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601389

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/3/2014 11:30:00 AM

AS DOC #: A000601389

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 04/14/2010, found a(n): 2" Iron post with a 2" Brass
cap stamped 1933, 0.5' Above Ground

- | | |
|--|---|
| <input checked="" type="checkbox"/> left monument as found | <input type="checkbox"/> lowered monument |
| <input type="checkbox"/> removed monument (explain) | <input type="checkbox"/> raised monument |

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

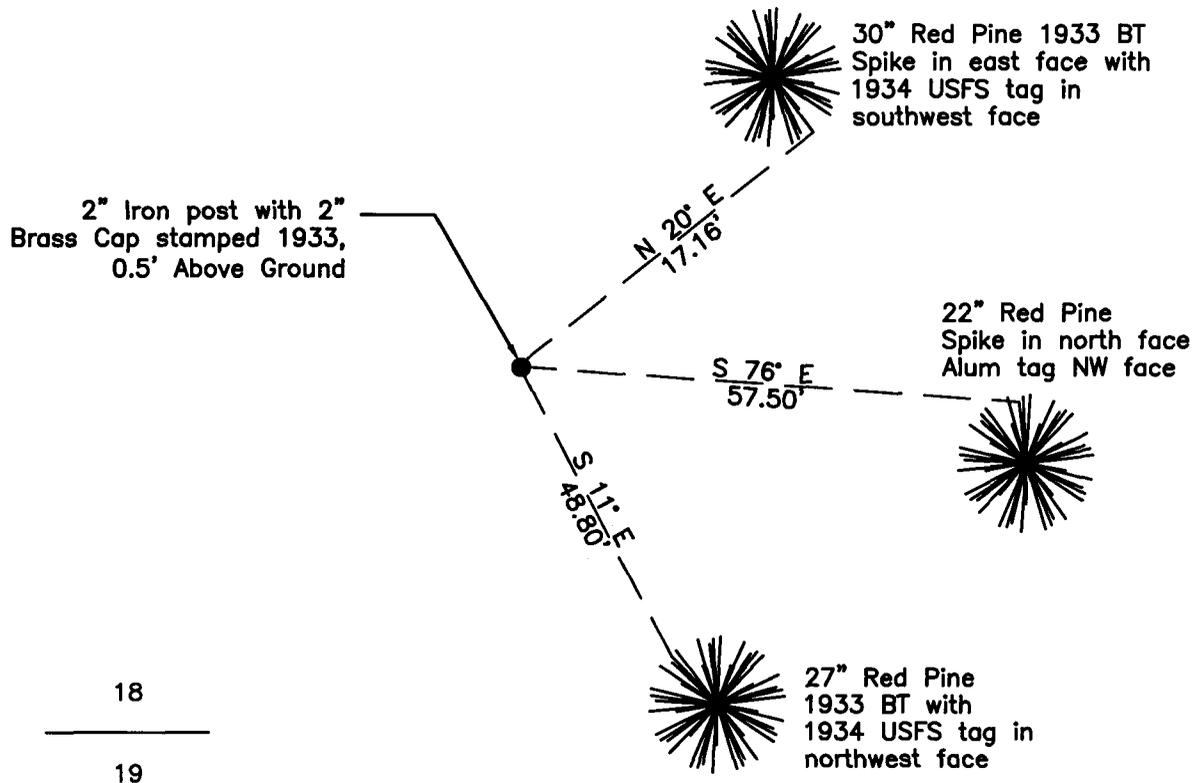

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17215048.020

Easting: 1260818.639

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 18 and 19 of Township 145 North, Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the Government Land Office his field notes indicate a post set at this corner position, witnessed by:

Blk Pine 5" North 20° East, 67 links
Yellow Pine 14" South 30° East, 6 links

1933; Resurvey by GLO, Willis W. Bandy, set by lost proportionate methods, an iron post 2"x3' 27" in ground with stamped Brass Cap and witnessed .

Red Pine 24" North 20 ½° East, 26 links
Red Pine 20" South 11 ¼° East 74 links

1934; J.A. Gjelhaug, CCC, RLS# 1337, 874 forms, found a 1 ½" Brass Capped Iron Pipe 6" above ground witnessed and set BT's. Information on file with the USFS office in Cass Lake.

Red (Norway) Pine 24" North 21 ½° East, 24 links
Red (Norway) Pine 20" South 11 ½ ° East 73 ½ links

1966; William H. Okerman, RLS # 6807 and M. Hansey, USFS Book 2 of Township 145 North, Range 30 West, page 16, found monument in good condition with both bearing trees. An Affidavit as to Location of Government Corner is on file at the Cass County Office of Register of Deeds. Corner is witnessed by:

Red Pine 26" North 20 ½° East, 17.16 ft. with scribe (1933 tie)
Red Pine 20" South 11 ¼° East, 48.84 ft. with scribe (1933 tie)

2002; R. Main, USFS Book 2 of Township 145 North, Range 30 West, page 16, found corner in place up 6" In mixed hardwoods and red pines witnessed by:

Red Pine 26" North 20 ½° East, 17.16 ft. with scribe (1933 tie)
Red Pine 20" South 11 ¼° East, 48.84 ft. with scribe (1933 tie)

2010; A Kadrmas, Lee & Jackson survey crew, found a 2" Iron post with a 2" Brass Cap stamped 1933, 0.5' above ground. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Surveyors Office

United States Forest Service

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office

Cass County Engineers Office

Northern Engineering and Consulting Inc.

MnDOT – District Office 2